P-Series Single Sided






P-Series Single Sided

Direct Vent · Flush Face





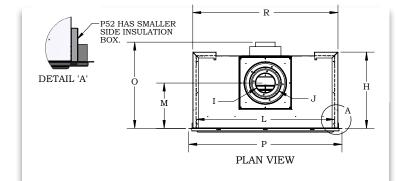

Features:

 Clean-Face design allows for brick or tile installation over the fireplace frame

PSZDF with speckled stones and Optional difftwood log set shown on reverse

- Convertible to Top or Rear vent
- Concealed Ribbon burner comes standard with opal Fire Stones[‡]
- Black Porcelain Firebox Liner
- □ Accent up-lighting
- Fans equipped with fan speed control
- Full function remote control for flame modulation, thermostatic control, light on/off control, fan speed control & battery backup for continuous operation during power failure
- ☐ Snap-Lock door system with flush Screen Barrier
- 6-level adjustable flame control
- ☐ 100% fail-safe shut-off valve

Options:

- Driftwood log set available to accent any media option
- Designer speckled stones, firestones, or fireglass
- ☐ Fireplace surround* in satin black or stainless steel

Fireplace BTU/H Input				Framing Dimensions							
Model#	Natural Gas	Liquid Propane	П	Model#	U	٧	W	Х	Y	Z	
P38DF	25,000	25,000		P38DF	53%"	37¾"	781/4"	201/8"	341/4"	411/4"	
P42DF	32,000	32,000		P42DF	581/2"	42"	82%"	211/8"	35"	42"	
P52DF	40,000	40,000		P52DF	645/8"	52"	913/8"	241/2"	37½"	43"	

N


- * Surround sold separately
- * Surround option can affect framing dimensions
- ‡ Go to www.montigo.com for color images & other accessory options

Consult the owner's manual for complete installation instructions and proper clearances to combustible surfaces prior to installing fireplace.

All specifications, framing dimensions, product designs, materials and colors are subject to change without notice. The actual flame pattern and color may vary slightly from the illustrations. Diagrams and illustrations are not to scale.

Options & accessories may have associated surcharge

For more inspiration go to: www.montigo.com



FRONT VIEW

GAS SUPPLY

LEFT SIDE VIEW



-POWER

RIGHT SIDE VIEW

*Framing Dimensions shown for models without surround

Available at:









P/N XB2600 151104