


FP16 ARCH LE

FOR MEDIUM TO LARGE SPACES

UNIT DIMENSIONS



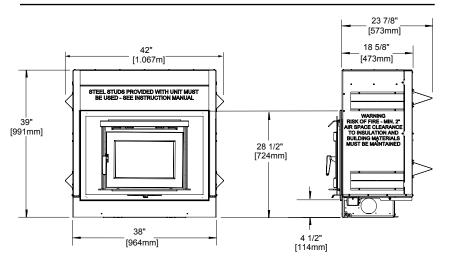


TECHNICAL DATA


70,000 BTU Cord Wood 47,000 BTU EPA Test Fuel

Efficiency (LHV) 68% Emissions 1.4 gm/hr. Log Size (recommended) 16" Log Size (max) 17" Firebox Size 1.6 cu.ft. Glass Viewing Area 173 sq.in. Weight 480 lb.

FRAMING DIMENSIONS



А	55 1/2"
В	42"
С	24"
D	
E	21 1/2"
F	



CLEARNACES

Minimum distance to the underside of the Mantel (4" deep) from the top of the Heat Exchanger Air Deflector.	20 3/4″ (530mm)
Minimum distance to the adjacent wall from the side of the fireplace door.	15″ (380mm)
Minimum distance to the Mantel side facing (max 4" deep) from the side of the fireplace door.	12″ (305mm)
Minimum width of floor protection from side of door opening.	8" (200mm)
Minimum depth of non-combustible ember protector: from the front of the fireplace.	18″ (455mm)