



SOLARA II

ZERO CLEARANCE DIRECT VENT GAS FIREPLACE

Unit Illustrated: ZCV3622N Zero Clearance Direct Vent Fireplace (Natural Gas), ZCV36SWFBL Surround (Flatt – Black), LOGC51 Log Set (Oak), ZCV3622PRL Porcelain Reflective Liner.

 **marquis**
FIREPLACE COLLECTION

ADD SOME SIZZLE

Incredibly versatile, the **SOLARA** is perfectly at home with a classic mantle or contemporary wall surround. Plus you can also choose a log set or a contemporary rock set.

Visit marquisfireplaces.net to see the latest evolution in fireplaces.


Unit Illustrated (right): ZCV3622N Zero Clearance Direct Vent Natural Gas Fireplace, ZCV36SWFBL Surround (Flatt –Black), ZCV3622PRL Porcelain Reflective Liner, LOGC51 Log Set (Oak).



Find all detailed Solara manuals:



PRODUCT DIMENSIONS

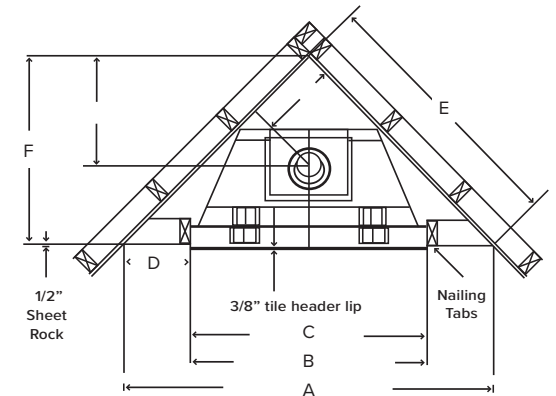

ZCV3622 – TOP FLUE MODEL

FRAMING DIMENSIONS	VIEWING AREA	CLEAN VIEW CIRCULATING KIT (CVCK)	Actual	Framing
A 53 1/2"	Width 29 3/4"	Height	33 1/2"	37 1/4"
B 36"	Height 18 5/8"	Front Width	36"	36 3/8"
C 36 3/8"		Depth	17 7/16"	17 1/2"
D 8 9/16"				
E 37 7/8"				
F 26 3/4"				



PRODUCT SPECIFICATIONS

MODEL	ZCV3622N ZCV3622NE	ZCV3622LP ZCV3622LPE
Fuel	Natural Gas	Propane
Input Max.	18,000 BTU	18,000 BTU
Input Min.	13,000 BTU	15,000 BTU
FE (P.4.1-15)	60.54% / 63.46%	62.09% / 65.09%

STANDARD FEATURES

Millivolt or IPI valve system allows operation during a power failure with Hi/Low heat and flame adjustment

Proprietary burner, with realistic burn

Mobile Home, Bedroom and Bed Sitting Room approved

Safety Screen Barrier

OPTIONAL FEATURES

Surround – Hearth Mount:

Black (Coverage: 34 1/8"H x 39"W)

Surround – Flatt:

Black (Coverage: 37 1/4"H x 40 7/8"W)

Accessories:

Log set or rock set required

Liners:

Porcelain Reflective Liner or Metal Brick Liners

Fan Kit:

Heat activated with variable speed control

Thermostat:

Wall Mount or Programmable

Remote:

Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating and fan control

Wall Mount Battery Holder (WMBH):

The battery holder provides power to the IPI system in case of power failures. Locating the battery holder outside of the fireplace (wall mount), provides a convenient and accessible location for battery installation and removal.

Unit Illustrated (left): ZCV3622N Zero Clearance Direct Vent Gas Fireplace (Natural Gas), LOGC51 Log Set (Oak), ZCV3622PRL Porcelain Reflective Liner, ZCV36S1BL Surround (Hearth Mount – Black).

ACCESSORIES

LOG & ROCK SET



LOGC51 Split Oak Log Set




MQROCK2 Natural Rock Set

LINERS



PL Porcelain Reflective




Metal Brick

REMOTE




PF1

SURROUNDS



ZCV36S1BL Hearth Surround



ZCV36SWFBL Flatt Surround

THERMOSTAT



Z80PT Wall Mount



FOR CALIFORNIA RESIDENTS ONLY:

WARNING! This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel consumption, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov.



Marquis Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.

Certification: Certified to ANSI Z21.88-2017, CSA 2.33-2017 Vented Gas Fireplace Heaters.

Note: Components may have to be ordered separately to create a complete unit. Discuss with your local Marquis Dealer for clarification.

Canada

ENERGUIDE

Look for the **EnerGuide** Gas Fireplace Energy Efficiency Rating in this brochure

Based on CSA P.4.1-15

Unit Illustrated: ZCV3622N Zero Clearance Direct Vent Fireplace (Natural Gas), LOGC51 Log Set (Oak), ZCV3622ML Metal Brick Liner. (Finishing materials that cover the Fireplace must be non-combustible materials.)

Crafted entirely in Canada, each Marquis fireplace is built to the highest standards and made to last.

LIMITED LIFETIME WARRANTY



2340 Logan Avenue
Winnipeg, Manitoba, CAN
R2R 2V3
Phone: 204.632.1962
Fax: 204.632.1960
marquisfireplaces.net

Printed in Canada
B092 - 10/2025