

# MODORE 95 SINGLE-SIDED FIREPLACE



EuropeanHome

Manufacturer and Importer of high-end Gas, Wood and Electric Fireplaces



Dutch designs imported  
from the Netherlands




## SPECIFICATIONS

|                                     |                                                                        |
|-------------------------------------|------------------------------------------------------------------------|
| <b>GAS TYPE</b>                     | Natural Gas or Propane                                                 |
| <b>BURNER</b>                       | Single Burner                                                          |
| <b>HEAT OUTPUT (NATURAL GAS)</b>    | 17,050 - 36,200 BTU/hr                                                 |
| <b>HEAT OUTPUT (LIQUID PROPANE)</b> | 13,650 - 32,400 BTU/hr                                                 |
| <b>VIEWABLE OPENING</b>             | 36 <sup>5</sup> / <sub>16</sub> W x 16 <sup>13</sup> / <sub>16</sub> H |
| <b>WEIGHT</b>                       | 251 lbs.                                                               |
| <b>VENTING</b>                      | Requires 5" x 8" Direct Vent                                           |
| <b>FLAME ADJUSTMENT</b>             | Yes                                                                    |
| <b>INTERIOR</b>                     | Black Anthracite (Standard)                                            |
| <b>REMOTE CONTROL</b>               | Yes                                                                    |
| <b>ELECTRIC IGNITION</b>            | Yes                                                                    |
| <b>CERTIFICATION</b>                | ANSI Z21.11.50a-2008, CSA 2.22a-2008 -<br>Vented Gas Fireplaces        |
| <b>MASS APPROVAL CODE</b>           | G3-0219-3                                                              |
| <b>EFFICIENCY</b>                   | 83%                                                                    |

# PRODUCT OPTIONS & ACCESSORIES

## SINGLE BURNER SYSTEM

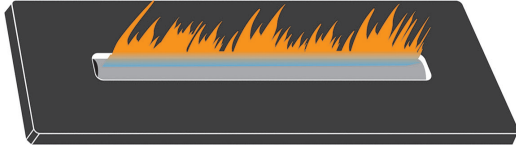

| PRODUCT   | ITEM CODE     |
|-----------|---------------|
| MODORE 95 | E4-MOD-95-KIT |

## GLASS SAFETY BARRIER (GSB)

| PRODUCT   | ITEM CODE         |
|-----------|-------------------|
| MODORE 95 | E4-MOD-95-GSB-KIT |

## PROPANE (LP) CONVERSION KIT

| PRODUCT       | ITEM CODE     |
|---------------|---------------|
| For 95 Models | E4-SA-LPCK-14 |

## CONVECTION AIR OPENING TRIMS



| PRODUCT                                             | ITEM CODE             |
|-----------------------------------------------------|-----------------------|
| Opening Size 8" x 1.75"<br>Frame Size 10.5" x 3.75" | E4-SA-PF-CAOT-8-02    |
| Opening Size 10" x 2.5"<br>Frame Size 12" x 4.5"    | E4-SA-PF-CAOT-10-02   |
| Opening Size 11" x 3"<br>Frame Size 12.5" x 4.5"    | E4-SA-PF-CAOT-11-02   |
| Opening Size 11" x 5.5"<br>Frame Size 13" x 7.5"    | E4-SA-PF-CAOT-11.5-02 |
| Opening Size 20" x 1.75"<br>Frame Size 22" x 3.75"  | E4-SA-PF-CAOT-20-03   |
| Opening Size 25" x 2"<br>Frame Size 27" x 4"        | E4-SA-PF-CAOT-25-03   |
| Opening Size 34" x 1.75"<br>Frame Size 36" x 3.75"  | E4-SA-PF-CAOT-34-02   |
| Opening Size 36" x 1.75"<br>Frame Size 38" x 3.75"  | E4-SA-PF-CAOT-36-03   |
| Opening Size 38" x 2.5"<br>Frame Size 40" x 4.5"    | E4-SA-PF-CAOT-38-02   |
| Opening Size 40" x 1.75"<br>Frame Size 42" x 3.75"  | E4-SA-PF-CAOT-40-03   |
| Opening Size 50" x 2"<br>Frame Size 52" x 4"        | E4-SA-PF-CAOT-50-02   |

## FIRE MEDIA - LANDSCAPE SERIES




FALLEN BIRCH



FOREST PATH



LOG SET



TUNDRA

| PRODUCT      |               | ITEM CODE    |
|--------------|---------------|--------------|
| FALLEN BIRCH | For 95 Models | E4-FM-FB-45  |
| FOREST PATH  | For 95 Models | E4-FM-FP-45  |
| LOG SET      | For 95 Models | E4-LSE-45 II |
| TUNDRA       | For 95 Models | E4-FM-TN-45  |

## FIRE MEDIA - CLASSIC SERIES



BLACK QUARTZ



BRILLIANTS



CARRARA PEBBLES



GRAY STONES

| PRODUCT         |               | ITEM CODE   |
|-----------------|---------------|-------------|
| BLACK QUARTZ    | For 95 Models | E4-STBGE4-7 |
| BRILLIANTS      | For 95 Models | E4-STDE4-6  |
| CARRARA PEBBLES | For 95 Models | E4-STC4-2   |
| GRAY STONES     | For 95 Models | E4-FM-GS-5  |

## INTERIOR BLACK REFLECTIVE PANELS

| PRODUCT       | ITEM CODE       |
|---------------|-----------------|
| For 95 Models | E4-CP-BG-MOD-95 |

## INTERIOR CONCRETE STYLE PANELS

| PRODUCT       | ITEM CODE       |
|---------------|-----------------|
| For 95 Models | E4-CP-CON-95-FR |

## POWER VENT

IN-LINE 2 TERMINATION POWER VENT FOR VENTING UP TO 98 FEET


### ITEM CODE

E4-PV-01-KIT





## MISC ACCESSORIES

| PRODUCT               | ITEM CODE      |
|-----------------------|----------------|
| Home Automation Cable | E4-SA-SHSC-02  |
| Wi-fi Enabling Kit    | E4-GS-Wi-fi    |
| Puck Smart Control    | E4-GS-PUCK-02  |
| Dealer Service Case   | E4-SVC-Case-02 |

# CUT SHEET

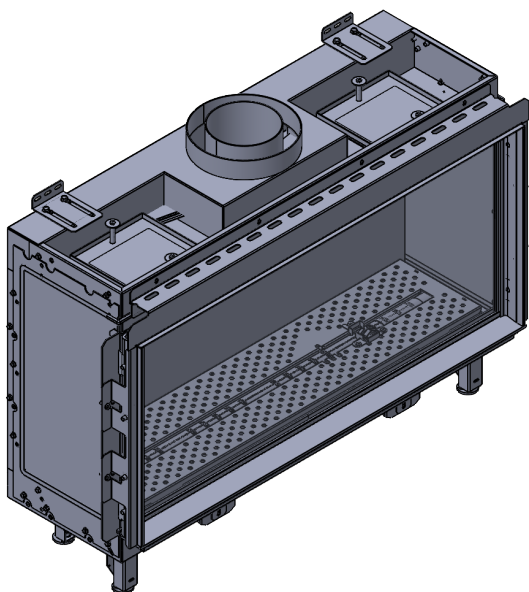


| Letter | Inches                           | Millimeters |
|--------|----------------------------------|-------------|
| A      | 7 <sup>13</sup> / <sub>16</sub>  | 198         |
| B      | 32                               | 813         |
| C      | 36 <sup>7</sup> / <sub>8</sub>   | 936         |
| D      | 6 <sup>9</sup> / <sub>16</sub>   | 166         |
| E      | 11 <sup>1</sup> / <sub>16</sub>  | 281         |
| F      | 27 <sup>7</sup> / <sub>16</sub>  | 697         |
| G      | 24                               | 609         |
| H      | 16 <sup>13</sup> / <sub>16</sub> | 427         |
| I      | 8 <sup>7</sup> / <sub>16</sub>   | 214         |
| J      | 12 <sup>13</sup> / <sub>16</sub> | 325         |
| K      | 36 <sup>5</sup> / <sub>16</sub>  | 322         |
| L      | 34 <sup>9</sup> / <sub>16</sub>  | 878         |

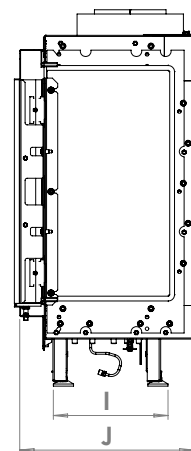
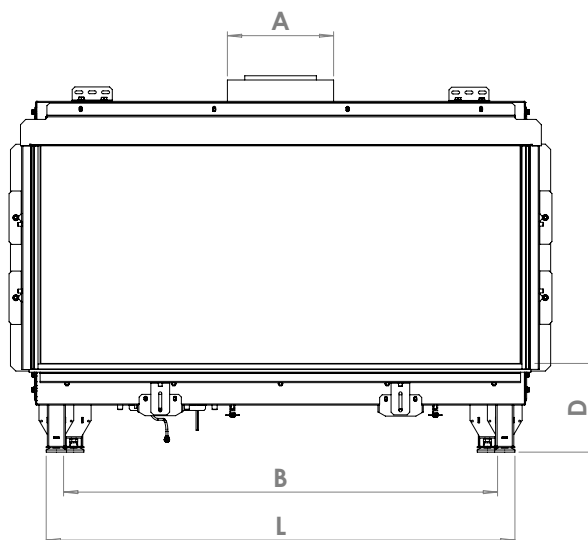
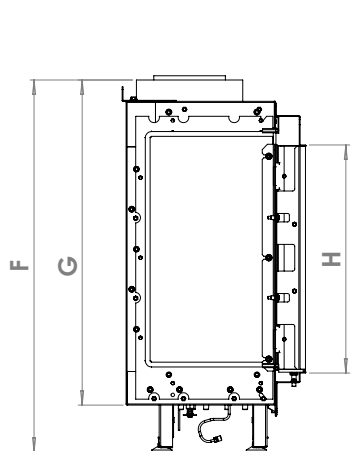
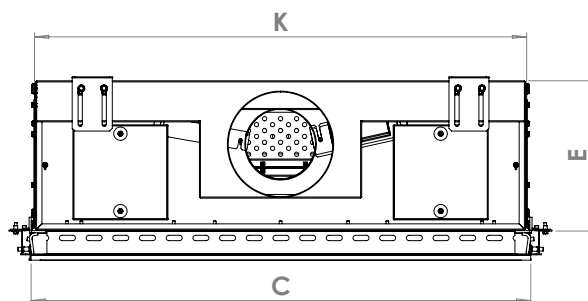


# CUT SHEET

## MODEL WITH GLASS SAFETY BARRIER (GSB)

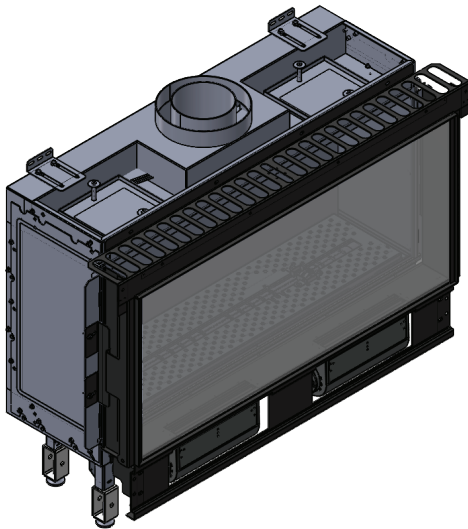

| Letter | Inches                          | Millimeters |
|--------|---------------------------------|-------------|
| A      | 7 <sup>7</sup> / <sub>8</sub>   | 199         |
| B      | 36 <sup>9</sup> / <sub>16</sub> | 928         |
| C      | 16 <sup>5</sup> / <sub>8</sub>  | 422         |
| D      | 34 <sup>9</sup> / <sub>16</sub> | 878         |
| E      | 36 <sup>5</sup> / <sub>8</sub>  | 931         |
| F      | 40 <sup>1</sup> / <sub>16</sub> | 1018        |
| G      | 9 <sup>5</sup> / <sub>16</sub>  | 236         |
| H      | 30 <sup>3</sup> / <sub>4</sub>  | 781         |
| I      | 40 <sup>7</sup> / <sub>16</sub> | 1027        |
| J      | 15 <sup>1</sup> / <sub>8</sub>  | 384         |
| K      | 8 <sup>7</sup> / <sub>16</sub>  | 215         |
| L      | 15 <sup>5</sup> / <sub>8</sub>  | 397         |

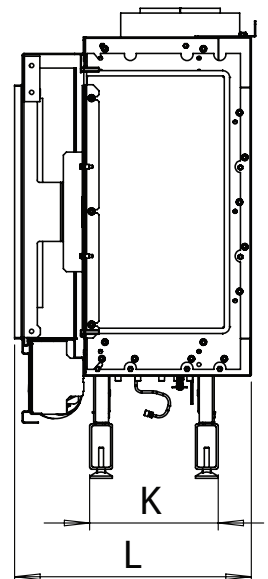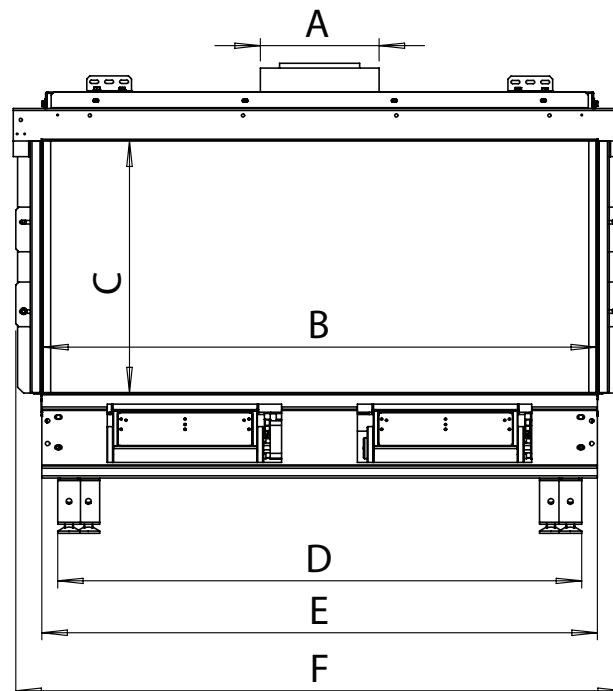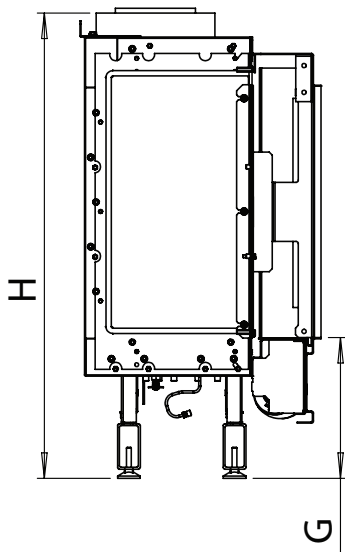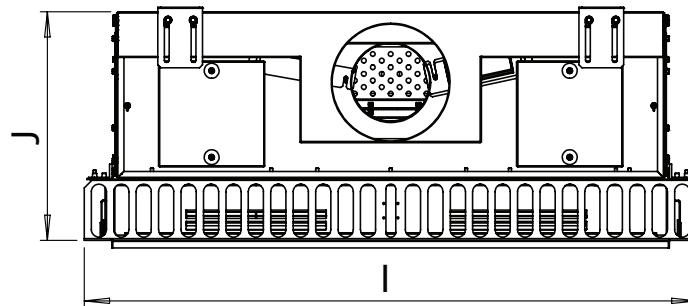

# VENTING CHARTS

The tables below are the same for fireplaces with vent collar diameter 5/8 and 4/6. Fireplaces in this category are never to be reduced to ensure a correctly functioning fireplace.

## 3.1.1 Calculation table horizontal termination 5/8 inch

|                                                                          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|--------------------------------------------------------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 36'                                                                      | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V | V |
| 33'                                                                      | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V | V |
| 30'                                                                      | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V | V |
| 27'                                                                      | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V | V |
| 24'                                                                      | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V | V |
| 21'                                                                      | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V | V |
| 18'                                                                      | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V | V |
| 15'                                                                      | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V | V |
| 13'6"                                                                    | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V | V |
| 12'                                                                      | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V | V |
| 10'6"                                                                    | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V | V |
| 9'                                                                       | V | V | V | V | V | V | V | V | V | V | V | V | V | V | V | V |
| 7'6"                                                                     | V | V | V | V | V | V | V | V | V | V | V | V | V | V | V | V |
| 6'                                                                       | V | V | V | V | V | V | V | V | V | V | V | V | V | V | V | V |
| 4'6"                                                                     | V | V | V | V | V | V | V | V | V | V | V | V | X | X | X | X |
| 3'                                                                       | V | V | V | V | V | V | V | V | X | X | X | X | X | X | X | X |
| 20"                                                                      | V | V | V | V | X | X | X | X | X | X | X | X | X | X | X | X |
| Total Horizontal Length                                                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| 20" 3' 4'6" 6' 7'6" 9' 10'6" 12' 13'6" 15' 16'6" 18' 19'6" 21' 22'6" 24' |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

## 3.1.2 Calculation table vertical termination 5/8 inch

For a vertical termination a minimal starting length of 20" before an elbow is required and - **Total Vertical Length** is 3'.

|                                                                            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------------------------------------------------------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 72'                                                                        | V | V | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| 69'                                                                        | R | R | V | V | X | X | X | X | X | X | X | X | X | X | X | X |
| 66'                                                                        | R | R | R | R | V | V | X | X | X | X | X | X | X | X | X | X |
| 63'                                                                        | R | R | R | R | R | R | V | V | X | X | X | X | X | X | X | X |
| 60'                                                                        | R | R | R | R | R | R | R | R | V | V | X | X | X | X | X | X |
| 57'                                                                        | R | R | R | R | R | R | R | R | R | R | V | V | X | X | X | X |
| 54'                                                                        | R | R | R | R | R | R | R | R | R | R | R | R | V | V | X | X |
| 51'                                                                        | R | R | R | R | R | R | R | R | R | R | R | R | R | V | V | X |
| 48'                                                                        | R | R | R | R | R | R | R | R | R | R | R | R | R | V | V | X |
| 45'                                                                        | R | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V |
| 42'                                                                        | R | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V |
| 39'                                                                        | R | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V |
| 36'                                                                        | R | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V |
| 33'                                                                        | R | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V |
| 30'                                                                        | R | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V |
| 27'                                                                        | R | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V |
| 24'                                                                        | R | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V |
| 21'                                                                        | R | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V |
| 18'                                                                        | R | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V |
| 15'                                                                        | R | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V |
| 13'6"                                                                      | R | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V |
| 12'                                                                        | R | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V |
| 10'6"                                                                      | R | R | R | R | R | R | R | R | R | R | R | R | R | V | V | V |
| 9'                                                                         | V | V | V | V | V | V | V | V | V | V | V | V | V | V | V | V |
| 7'6"                                                                       | V | V | V | V | V | V | V | V | V | V | V | V | V | V | V | V |
| 6'                                                                         | V | V | V | V | V | V | V | V | V | V | V | V | V | V | V | V |
| 4'6"                                                                       | V | V | V | V | V | V | V | V | V | V | V | V | V | X | X | X |
| 3'                                                                         | V | V | V | V | V | V | V | V | V | X | X | X | X | X | X | X |
| Total Vertical Length                                                      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| 0 20" 3' 4'6" 6' 7'6" 9' 10'6" 12' 13'6" 15' 16'6" 18' 19'6" 21' 22'6" 24' |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

# VENTING CLEARANCES

## 3.1.3 Calculation table vent diameter 4/6 inch

**Please note:** This table is only applicable when vent is reduced. Fireplaces with a 4/6 vent collar do not apply to this table, but instead **table 3.6.1** or **3.6.2** is to be used.

For a vertical termination a **Total Vertical Length** of at least 7 feet is necessary!


|       |   |     |    |      |    |      |    |
|-------|---|-----|----|------|----|------|----|
| 36'   | V | V   | X  | X    | X  | X    | X  |
| 33'   | R | R   | V  | V    | X  | X    | X  |
| 30'   | R | R   | R  | R    | V  | V    | X  |
| 27'   | R | R   | R  | R    | R  | R    | V  |
| 24'   | R | R   | R  | R    | R  | R    | V  |
| 21'   | R | R   | R  | R    | R  | R    | V  |
| 18'   | R | R   | R  | R    | R  | R    | V  |
| 15'   | R | R   | R  | R    | R  | V    | X  |
| 13'6" | R | R   | R  | R    | V  | X    | X  |
| 12'   | R | R   | R  | V    | X  | X    | X  |
| 10'6" | R | R   | R  | V    | X  | X    | X  |
| 9'    | V | V   | V  | V    | X  | X    | X  |
| 7'6"  | V | V   | V  | V    | X  | X    | X  |
| 6'    | V | V   | X  | X    | X  | X    | X  |
|       | 0 | 20" | 3' | 4'6" | 6' | 7'6" | 9' |

Total Horizontal Length

|          |                             |
|----------|-----------------------------|
| <b>R</b> | Air Restrictor Required     |
| <b>V</b> | Air Restrictor Not Required |
| <b>X</b> | Can Not Have That Vent Run  |

# VENTING CLEARANCES

## HORIZONTAL VENT TERMINATION CLEARANCES AND REQUIREMENTS

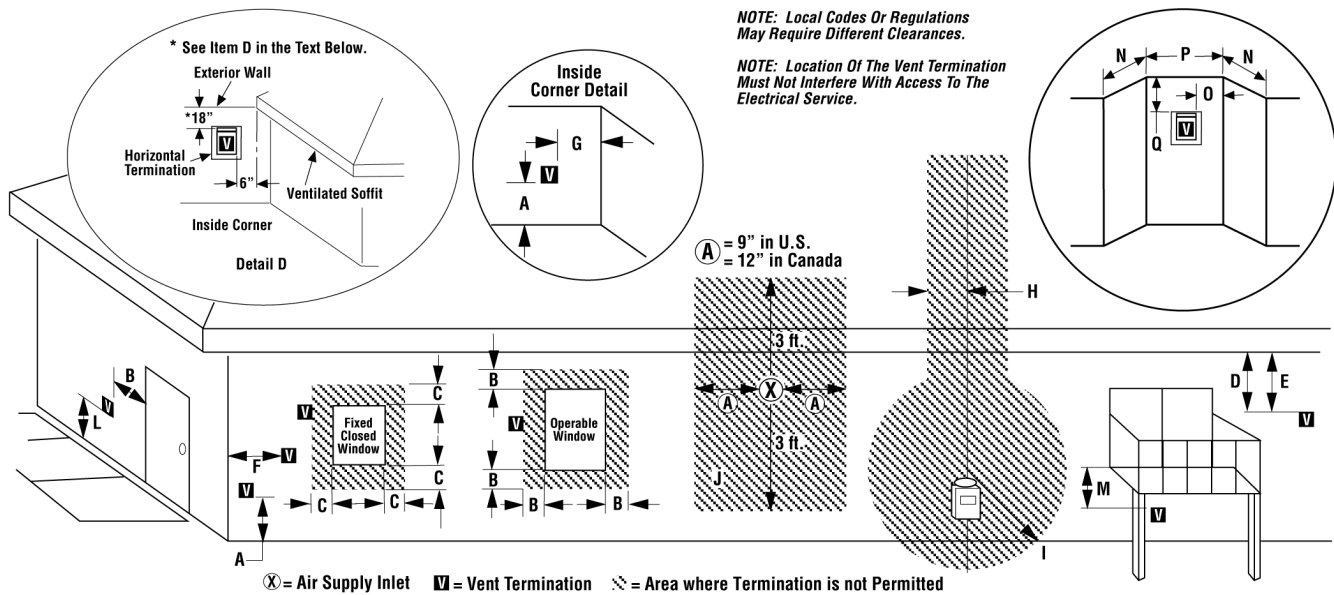

|                                                                                                                                                                            | US Installation**                                                                                                                                                                       | Canadian Installation*                                                                                  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| <b>A</b> = Clearance above grade, veranda, porch, deck, or balcony.                                                                                                        | 12 inches (30cm)**                                                                                                                                                                      | 12 inches (30cm)*                                                                                       |
| <b>B</b> = Clearance to window or door that may be opened.                                                                                                                 | 6 inches (15cm) for appliances < 10,000 Btuh (3kW), 9 inches (23cm) for appliances > 10,000 Btuh (3kW) and < 50,000 Btuh (15kW), 12 inches (30cm) for appliances > 50,000 Btuh (15kW)** | 6 inches (15cm) for appliances < 10,000 Btuh (3kW), 12 inches (30cm) for appliances > 10,000 Btuh (3kW) |
| <b>C</b> = Clearance to permanently closed window                                                                                                                          | 9 inches (229mm) recommended to prevent window condensation                                                                                                                             | 12 inches (305mm) recommended to prevent window condensation                                            |
| <b>D</b> = Vertical clearance to ventilated soffit located above the termination within a horizontal distance of 18 inches (458mm) from the center line of the termination | 18 inches (458mm)                                                                                                                                                                       | 18 inches (458mm)                                                                                       |
| <b>E</b> = Clearance to unventilated soffit                                                                                                                                | 12 inches (305mm)                                                                                                                                                                       | 12 inches (305mm)                                                                                       |
| <b>F</b> = Clearance to outside corner                                                                                                                                     | 5 inches (12.7cm) minimum                                                                                                                                                               | 5 inches (12.7cm) minimum                                                                               |
| <b>G</b> = Clearance to inside corner                                                                                                                                      | 2 inches (5.08cm) minimum - SV4.5HT-2                                                                                                                                                   | 2 inches (5.08cm) minimum - SV4.5HT-2                                                                   |
| <b>H</b> = Clearance to each inside of center line extended above meter/regulator assembly                                                                                 | 3 feet (91cm) within a height of 15 feet above the meter/regulator assembly**                                                                                                           | 3 feet (91cm) within a height of 15 feet above the meter/regulator assembly*                            |
| <b>I</b> = Clearance to service regulator vent outlet                                                                                                                      | 3 feet (91cm)**                                                                                                                                                                         | 3 feet (91cm)*                                                                                          |
| <b>J</b> = Clearance to nonmechanical air supply inlet to building or the combustion air inlet to any other appliance                                                      | 6 inches (15cm) for appliances < 10,000 Btuh (3kW), 9 inches (23cm) for appliances > 10,000 Btuh (3kW) and < 50,000 Btuh (15kW), 12 inches (30cm) for appliances > 50,000 Btuh (15kW)** | 6 inches (15cm) for appliances < 10,000 Btuh (3kW), 12 inches (30cm) for appliances > 10,000 Btuh (3kW) |
| <b>K</b> = Clearance to a mechanical air supply inlet                                                                                                                      | 3 feet (91cm) above if within 10 feet (3m) horizontally**                                                                                                                               | 6 feet (1.83m)*                                                                                         |
| <b>L</b> = Clearance above paved sidewalk or paved driveway located on public property                                                                                     | 7 feet (2.13m)‡                                                                                                                                                                         | 7 feet (2.13m)‡                                                                                         |
| <b>M</b> = Clearance under veranda, porch, deck or balcony                                                                                                                 | 12 inches (30cm)‡                                                                                                                                                                       | 12 inches (30cm)*‡                                                                                      |
| <b>N</b> = Depth of Alcove (Maximum)                                                                                                                                       | 6 feet (1.83m)**                                                                                                                                                                        | 6 feet (1.83m)*                                                                                         |
| <b>O</b> = Clearance to Termination (Alcove)                                                                                                                               | 6 inches (15.2mm)**                                                                                                                                                                     | 6 inches (15.2mm)*                                                                                      |
| <b>P</b> = Width of Alcove (Minimum)                                                                                                                                       | 3 feet (91cm)*                                                                                                                                                                          | 3 feet (91cm)*                                                                                          |
| <b>Q</b> = Clearance to Combustible Above (Alcove)                                                                                                                         | 18 inches (457mm)**                                                                                                                                                                     | 18 inches (457mm)*                                                                                      |
| * In accordance with the current CSA-B149.1 National Gas And Propane Installation Code.                                                                                    |                                                                                                                                                                                         |                                                                                                         |
| ** In accordance with the current ANSI SZ223.1/NFPA 54 National Fuel Gas Codes.                                                                                            |                                                                                                                                                                                         |                                                                                                         |
| ‡ A vent shall not terminate directly above a sidewalk or paved driveway which is located between two single family dwellings and serves both dwellings.                   |                                                                                                                                                                                         |                                                                                                         |
| *‡ Only permitted if veranda, porch, deck or balcony is fully open on a minimum 2 sides beneath the floor:                                                                 |                                                                                                                                                                                         |                                                                                                         |


# VENTING CLEARANCES

## VERTICAL TERMINATION CLEARANCES AND REQUIREMENTS

### Important Note for Roof Terminations

These instructions should be used as a guideline and do not supersede local codes in any way. Install venting according to local codes, these instructions, the current National Fuel Gas Code (ANSI Z223.1 in the USA) or the current standard of CAN/CSA-B149.1 in Canada.

### Vertical Vent Termination Clearances

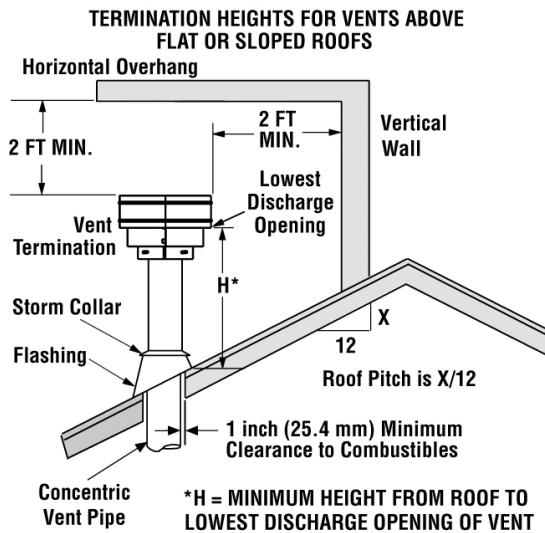


The vent / air intake termination clearances above the high side of an angled roof is as shown in the following chart:

**Termination Heights For Vents Above Flat Or Sloped Roofs**  
Ref. NFPA 54 / ANSI Z223.1

| Roof Pitch     | * Feet | * Meters |
|----------------|--------|----------|
| Flat to 6/12   | 1.0    | 0.3      |
| 6/12 to 7/12   | 1.25   | 0.38     |
| 7/12 to 8/12   | 1.5    | 0.46     |
| 8/12 to 9/12   | 2.0    | 0.61     |
| 9/12 to 10/12  | 2.5    | 0.76     |
| 10/12 to 11/12 | 3.25   | 0.99     |
| 11/12 to 12/12 | 4.0    | 1.22     |
| 12/12 to 14/12 | 5.0    | 1.52     |
| 14/12 to 16/12 | 6.0    | 1.83     |
| 16/12 to 18/12 | 7.0    | 2.13     |
| 18/12 to 20/12 | 7.5    | 2.29     |
| 20/12 to 21/12 | 8.0    | 2.44     |

Termination Heights

A second termination may be no closer than 12"/305 mm.

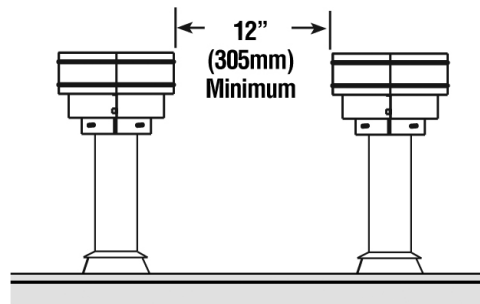

Multiple Termination Clearance