

Features

Meets requirements for efficiency rebates

Glowing ceramic ember base and logset

ILLUME / PROUDLY HANDCRAFTED IN NORTH AMERICA

ILLUME  
CONTEMPORARY

EFFICIENTLY ELEGANT

ILLUME INSERTS  
CONTEMPORARY

30FID  
34FID

CO-LINEAR  
INSERT

Standard

Contemporary burner

Multi-function remote control

Black porcelain liner

Halogen uplighting

Remote Hi-Lo flame

Battery backup

Micro mesh screen

Options

Propane conversion kit

Remote controlled fans

Square, oversized or 4 sided surround<sup>†</sup>

Speckled stones, driftwood, glass media<sup>†</sup>

WiFi phone app control

QUICK DIMENSIONS

	30FID		34FID	
	UNIT	FRAM.	UNIT	FRAM.
F.WIDTH	29½	N/A	33½	N/A
B.WIDTH	19¾	N/A	23¾	N/A
HEIGHT	20	N/A	23¾	N/A
DEPTH	13½	N/A	14½	N/A
VIEWING	24¼ x 14½		28¾ x 18¾	

<sup>†</sup>Required to complete install

BTU LISTING

30FIDNIL-01 / 24,000  
30FIDLIL-01 / 23,000

34FIDNIL-01 / 31,000  
34FIDLIL-01 / 30,000

EFFICIENCY (P4)


30FIDNIL-01 / 77.6%  
30FIDLIL-01 / 79%

34FIDNIL-01 / 77.4%  
34FIDLIL-01 / 78.5%





## ILLUME DIMENSIONS

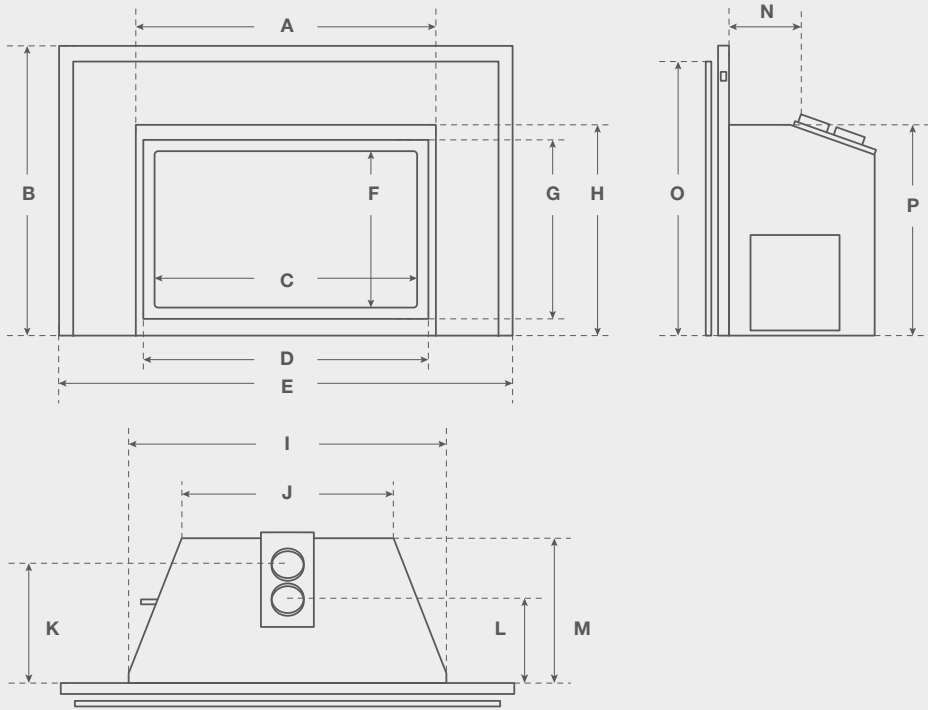

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
30FID	27¾	26⅞	24¼	26¼	42	14¼	16⅞	19½	29½	19⅞	11¼	8	13½	6¾	25⅞	20
34FID	31¾	31	28	38⅞	46½	17½	20⅞	23¾	33½	23⅞	12⅞	8⅞	15	6¾	29½	23¾



MONTIGO / ILLUME / 34FID / CONTEMPORARY



MONTIGO / ILLUME / 30FID / CONTEMPORARY



REMOTE<sup>Δ</sup>  
RXM5010



WALL REMOTE  
EC1550



WIFI PHONE APP  
CONTROL  
SIT-WIFI



BLACK PORCELAIN<sup>Δ</sup>  
PPL\*\*

<sup>Δ</sup> Standard on  
contemporary inserts

# Unit Specifications

## ICON LEGEND

AVAILABLE	+	NOT AVAILABLE	-
DEDICATED	◊	STANDARD	◦

	BTU	GAS SUPPLY PRESS. (SHOWN IN W.C.)	VENTING	FRONT VIEWING AREA	FRONT GLASS TYPE	STANDARD MEDIA	POWERVENT	REMOTE CONTROL	FANS	UPLIGHTING	DOWNLIGHTING
30FIDN-L-F [NG]	24,000	7	3"OUT 3"IN	24¼X 14¼	HIGH TEMPERATURE	NONE	-	◦	+	◦	-
30FIDL-L-F [PROPANE]	23,000	11	3"OUT 3"IN	24¼X 14¼	HIGH TEMPERATURE	NONE	-	◦	+	◦	-
30FIDN-S-F [NG]	24,000	7	3"OUT 3"IN	24¼X 14¼	HIGH TEMPERATURE	TRADITIONAL	-	◦	+	-	◦
30FIDL-S-F [PROPANE]	23,000	11	3"OUT 3"IN	24¼X 14¼	HIGH TEMPERATURE	TRADITIONAL	-	◦	+	-	◦
34FIDN-L-F [NG]	31,000	7	4"OUT 3"IN	28¾X 18½	HIGH TEMPERATURE	NONE	-	◦	+	◦	-
34FIDL-L-F [PROPANE]	30,000	11	4"OUT 3"IN	28¾X 18½	HIGH TEMPERATURE	NONE	-	◦	+	◦	-
34FIDN-S-F [NG]	31,000	7	4"OUT 3"IN	28¾X 18½	HIGH TEMPERATURE	TRADITIONAL	-	◦	+	-	◦
34FIDL-S-F [PROPANE]	30,000	11	4"OUT 3"IN	28¾X 18½	HIGH TEMPERATURE	TRADITIONAL	-	◦	+	-	◦

## ILLUME MASONRY CAVITY (MINIMUM)

	A	B	C	D	E
30FID	20	14	30	20	5
34FID	24	15	34	24	6

