

ILLUME / PROUDLY HANDCRAFTED IN NORTH AMERICA



Features

- Meets requirements for efficiency rebates
- Glowing ceramic ember base and logset

ILLUME

TRADITIONAL

EFFICIENTLY ELEGANT

ILLUME INSERTS TRADITIONAL

30FID
34FID

CO-LINEAR
INSERT

Standard

- Ceramic burner and logset
- Multi-function remote control
- Halogen downlighting
- Remote Hi-Lo flame
- Battery backup
- Micro mesh screen

Options

- Propane conversion kit
- Remote controlled fans
- Black porcelain liner
- Various traditional liners[†]
- Square, oversized or 4 sided surround[†]
- WiFi phone app control



QUICK DIMENSIONS

	30FID		34FID	
	UNIT	FRAM.	UNIT	FRAM.
F.WIDTH	29½	N/A	33½	N/A
B.WIDTH	19¾	N/A	23¾	N/A
HEIGHT	20	N/A	23¾	N/A
DEPTH	13½	N/A	14½	N/A
VIEWING	24¼ x 14½		28¾ x 18¾	

[†]Required to complete install

BTU LISTING

30FIDNIS-01 / 24,000
30FIDLIS-01 / 23,000

34FIDNIS-01 / 31,000
34FIDLIS-01 / 30,000


EFFICIENCY (P4)

30FIDNIS-01 / 78.8%
30FIDLIS-01 / 80.1%

34FIDNIS-01 / 81.1%
34FIDLIS-01 / 82%

[‡]Standard on all inserts
[†]Must order a liner to complete order

ILLUME DIMENSIONS

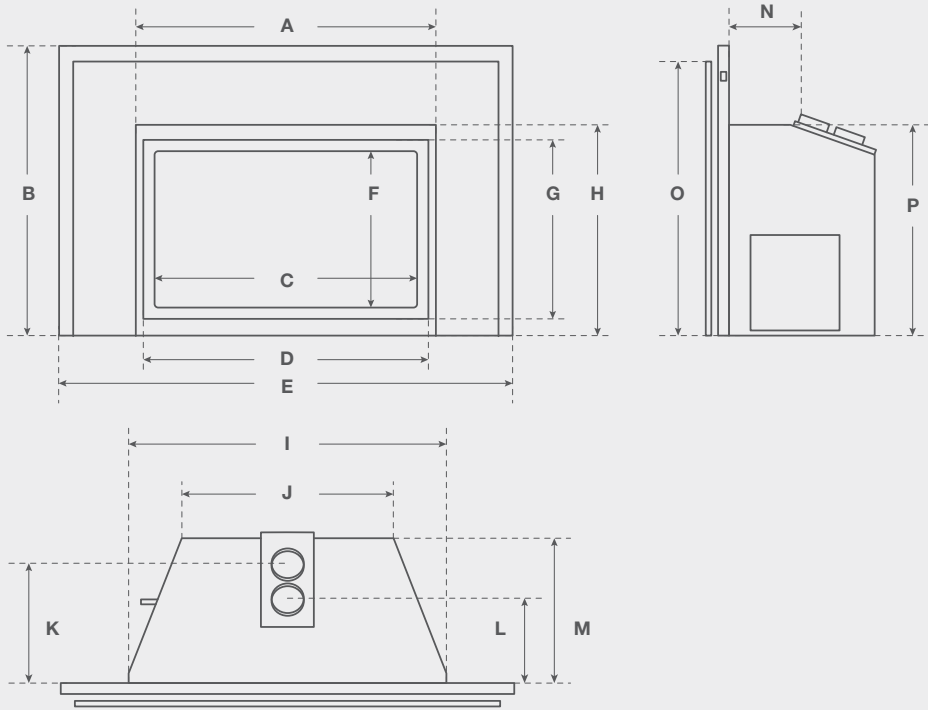

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
30FID	27 $\frac{3}{4}$	26 $\frac{7}{8}$	24 $\frac{1}{4}$	26 $\frac{1}{4}$	42	14 $\frac{1}{4}$	16 $\frac{5}{8}$	19 $\frac{1}{2}$	29 $\frac{1}{2}$	19 $\frac{7}{8}$	11 $\frac{1}{4}$	8	13 $\frac{1}{2}$	6 $\frac{3}{4}$	25 $\frac{3}{8}$	20
34FID	31 $\frac{3}{4}$	31	28	38 $\frac{3}{8}$	46 $\frac{1}{2}$	17 $\frac{1}{2}$	20 $\frac{5}{8}$	23 $\frac{3}{8}$	33 $\frac{1}{2}$	23 $\frac{3}{8}$	12 $\frac{3}{8}$	8 $\frac{5}{8}$	15	6 $\frac{3}{4}$	29 $\frac{1}{2}$	23 $\frac{3}{4}$



MONTIGO / ILLUME / 34FID / TRADITIONAL



MONTIGO / ILLUME / 30FID / TRADITIONAL



REMOTE^A
RXM5010



WALL REMOTE
EC1550




WiFi PHONE APP
CONTROL
SIT-WIFI



BLACK PORCELAIN[†]
PPL**



RUSTIC BROWN[†]
BRK3*FIB



RUSTIC RED[†]
BRK3*FIR

Unit Specifications

ICON LEGEND

AVAILABLE

+

NOT AVAILABLE

-

DEDICATED

◊

STANDARD

◦

	BTU	GAS SUPPLY PRESS. (SHOWN IN W.C.)	VENTING	FRONT VIEWING AREA	FRONT GLASS TYPE	STANDARD MEDIA	POWERVENT	REMOTE CONTROL	FANS	UPLIGHTING	DOWNLIGHTING
30FIDN-L-F [NG]	24,000	7	3"OUT 3"IN	24¼X 14¼	HIGH TEMPERATURE	NONE	-	◦	+	◦	-
30FIDL-L-F [PROPANE]	23,000	11	3"OUT 3"IN	24¼X 14¼	HIGH TEMPERATURE	NONE	-	◦	+	◦	-
30FIDN-S-F [NG]	24,000	7	3"OUT 3"IN	24¼X 14¼	HIGH TEMPERATURE	TRADITIONAL	-	◦	+	-	◦
30FIDL-S-F [PROPANE]	23,000	11	3"OUT 3"IN	24¼X 14¼	HIGH TEMPERATURE	TRADITIONAL	-	◦	+	-	◦
34FIDN-L-F [NG]	31,000	7	4"OUT 3"IN	28¾X 18¾	HIGH TEMPERATURE	NONE	-	◦	+	◦	-
34FIDL-L-F [PROPANE]	30,000	11	4"OUT 3"IN	28¾X 18¾	HIGH TEMPERATURE	NONE	-	◦	+	◦	-
34FIDN-S-F [NG]	31,000	7	4"OUT 3"IN	28¾X 18¾	HIGH TEMPERATURE	TRADITIONAL	-	◦	+	-	◦
34FIDL-S-F [PROPANE]	30,000	11	4"OUT 3"IN	28¾X 18¾	HIGH TEMPERATURE	TRADITIONAL	-	◦	+	-	◦

ILLUME MASONRY CAVITY (MINIMUM)

	A	B	C	D	E
30FID	20	14	30	20	5
34FID	24	15	34	24	6

