

### LOG SET IMPORTANT INFORMATION



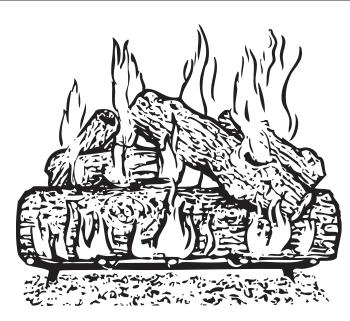

This instruction contains recommended log placement for your Real Fyre log set. This instruction contains recommended log placement for these Real Fyre logs which will promote good combustion and provide superior flame pattern and appearance, when the logs are used with a Peterson burner system. Adequate ventilation is absolutely necessary! Provided significant, noticeable sooting does not occur, some flexibility is possible in log placement to suit your individual preference (see Important below). If you experience a continued accumulation of black carbon (soot) on your logs it is an indication of incomplete combustion and you should move the effected log(s) so as to minimize the flame contact on the effected log(s). Please read these instructions completely and carefully.

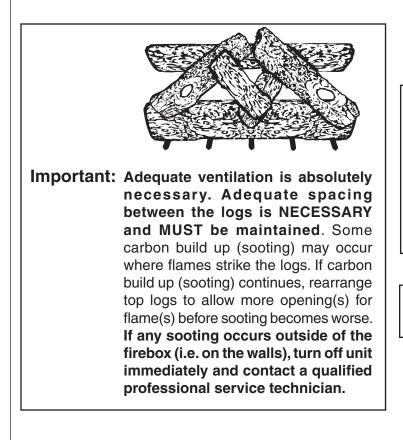

WARNING: Use ONLY Real Fyre burners and valves with this Real Fyre gas log set. Failure to do so may result in property damage or personal injury, and will void listings, certifications, and invalidate claims made to RHP. Contact your local Real Fyre dealer if you need more information.

This product is only warranted when used as part of a Robert H. Peterson Co. vented burner system.

**WARNING:** This gas log set is for use with <u>R.H. Peterson Co</u> burners (and parts) <u>ONLY.</u>

CAUTION: Burn hazard! Logs will remain hot for some time after use. If you need to reposition any log to maintain the proper layout, use heat resistant gloves or allow logs adequate time to cool before handling.

Failure to use Peterson burners and valves may result in a **DANGEROUS** situation and in property damage, personal injury or even death; will void listings and certifications; and will void any insurance coverage by R.H. Peterson Co or our insurers.

**Important:** Disregard the ember screen installation information in your burner system owner's manual.


This log set uses a unique screen different from the screen shown in your burner system owner's manual. Follow these instructions for ember and screen placement.

#### EMBER SCREEN PLACEMENT

After filling the burner pan with sand, securely fit the ember screen over the rear of the pan, so that it rests on it with approximately two inches (2") of screen overhanging beyond the back of the pan (see Fig. 1-2). Spread your glowing embers on the screen and over the sand. Continue with the log placement as shown on the following pages.

### LOG PLACEMENT

These log sets feature notches and indentations to assist in log placement and provide stability. The following pages will have detailed placement instructions for your specific log set.











Fig. 3-2

# Western Campfyre Log Placement Instructions (18" model)




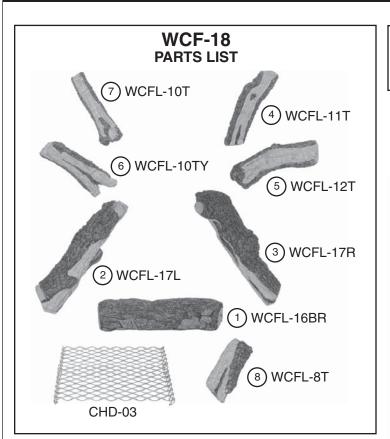


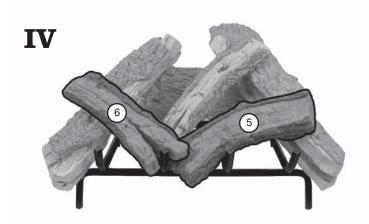


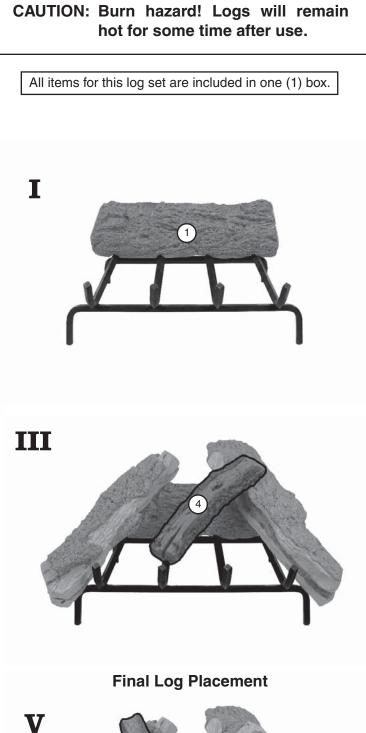


## Western Campfyre Log Placement Instructions (24" model)

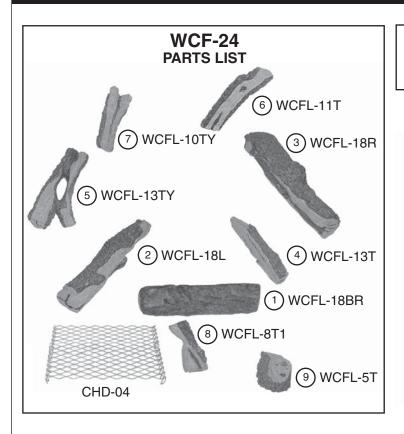

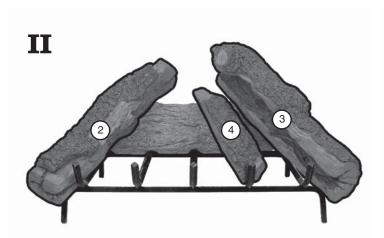


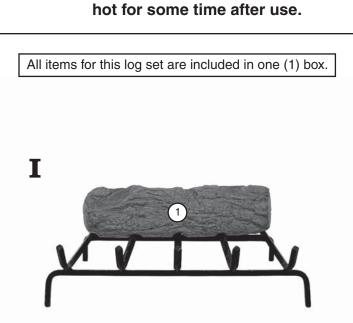

CAUTION: Burn hazard! Logs will remain

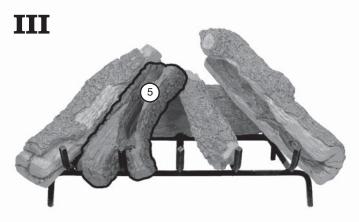



**Final Log Placement** 

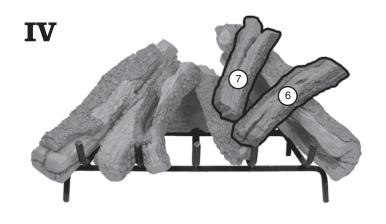



## Western Campfyre Log Placement Instructions (30" model)

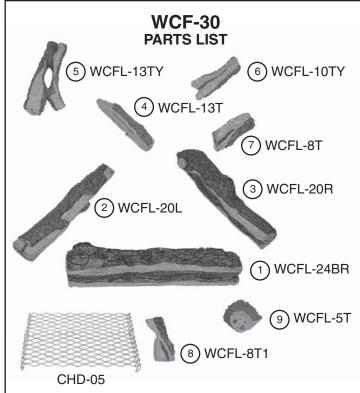

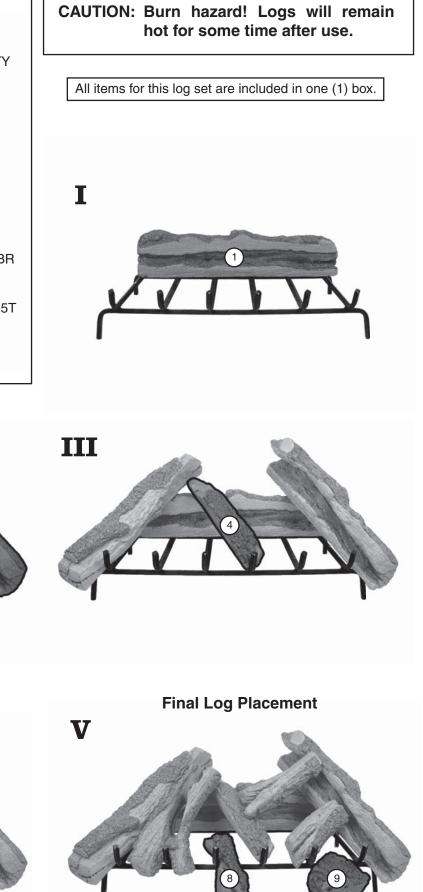

Π

IV

2

3

6