



HEARTH PRODUCTS





Designed to heat. Built to Last.

For over 30 years, unsurpassed quality and craftsmanship have made us an industry leader in innovative heating systems. Design, functionality, and efficiency merge to create exceptional products that will exceed all expectations. Whether time-honored traditional or bold and modern, our dynamic range of products will compliment any home décor. With a complete line of fireplace inserts, zero-clearance fireplaces, and freestanding stoves, we have the perfect solution for your heating requirements. We won't just meet your expectations; we'll exceed them...









- Clean Face Look No Louvers
- SIT Valve 820 (Standing Pilot)
- SIT Valve 885 (IPI System with Remote)
- Glass Size: 17½" x 19¾", 345½ in²
- Hand Welded Firebox
- 150 CFM Room Fan (with variable control)
- Limited Lifetime Warranty
- ClearView Safety Screen
- Quick Access Valve Controls

Available Options

- Remote or Thermostat Control
- Burner Options:
- High Definition Log Set
- Glass Burner with Diamond Glass
- Coal Burner
- Liner Options:
- Ceramic Brick Liner
- Ledgestone Liner
- Black Enameled Steel Liner
- Surround Options:
- Modern Surround– Minimal Surround
- Victorian Face (PB or AB)
- Four Sided Minimal Surround

Fireplace Specifications

BTU Maximum Input - NG	20,000 BTU			
BTU Minimum Output*	10,000 BTU			
Heating Area	1,100 ft ²			
P4 Efficiency	74.5%			
Glass Size	345½ in²			
Fireplace Install Dims.	HEIGHT WIDTH DEF 351/4" 251/4" 171			

^{*} Turn down is based on a 50% valve.



Classic Log Set



Coal Burner



3

Glass Burner with Diamond Glass







- Clean Face Look No Louvers
- SIT Valve 820 (Standing Pilot)
- SIT Valve 885 (IPI System with Remote)
- Glass Size: 28.6" x 23.85", 682 in²
- Hand Welded Firebox
- 150 CFM Room Fan (with variable control)
- ClearView Safety Screen
- Limited Lifetime Warranty

Available Options

- Burner Options:

- Glass Burner with Diamond Glass
- Painted Black Firebox Included
- Ceramic Brick Liner

- Slim Face Included

- Remote or Thermostat Control
- Optional 150 CFM Room Fan (Incl. w/IPI)
- Traditional Log Set
- Driftwood Log Set
- Liner Options:
- Herringbone Liner
- Black Enameled Steel Liner
- Surround Options:
- Forgeworks Face

Fireplace Specifications

1 1				
BTU Maximum Input - NG	24,000 BTU			
BTU Minimum Output*	12,000 BTU			
Heating Area	1,400 ft ²			
P4 Efficiency	69.3%			
Glass Size	682 in ²			
Fireplace Install Dims.	HEIGHT 40"	WIDTH 345/8"	DEPTH 151/8"	

^{*} Turn down is based on a 50% valve.



Traditional Log Set



Glass Burner with Diamond Glass



Driftwood Log Set







- Clean Face Look No Louvers
- SIT Valve 820 (Standing Pilot)
- SIT Valve 885 (IPI System with Remote)
- Glass Size: 28" x 30", 840 in²
- Hand Welded Firebox
- High Efficiency Heat Exchanger
- 150 CFM Room Fan (with variable control)
- Fixed Top Vent / Adjustable Rear Vent
- ClearView Safety Screen
- Limited Lifetime Warranty

Available Options

- Remote or Thermostat Control
- Burner Options:- Traditional Log Set
- Liner Options:
- Ceramic Brick Liner
- Ledgestone Liner
- Black Enameled Steel Liner
- Surround Options:– Slim Face Included
- Lattice Face
- Forgeworks Face

Fireplace Specifications

BTU Maximum Input - NG	38,000 BTU			
BTU Minimum Output*	19,000 BTU			
Heating Area	2,000 ft ²			
P4 Efficiency	67.3%			
Glass Size	840 in ²			
Fireplace Install Dims.	HEIGHT WIDTH DEP 431/2" 345%" 18			

^{*} Turn down is based on a 50% valve.



Traditional Log Set



Cast Iron Grate



High Efficiency Heat Exchanger







- Clean Face Look No Louvers
- SIT Valve 885 (IPI System with Remote)
- 67% Burner Turn Down
- Glass Size: 34¼" x 30", 1027½ in²
- Hand Welded Firebox
- Cast Iron Log Grate
- ClearView Safety Screen
- Limited Lifetime Warranty

Available Options

- Power Vent Kit
- Heat Distribution Kit
- Burner Options:– Ultra High Definition Log Set
- Liner Options:
- Rustic Brick Liner
- Ledgestone Liner
- Black Enameled Steel Liner

Fireplace Specifications

BTU Maximum Input - NG	48,000 BTU			
BTU Minimum Output*	16,000 BTU			
Heating Area	2,000 ft ²			
P4 Efficiency	57.7%			
Glass Size	1027½ in²			
Fireplace Install Dims.	HEIGHT WIDTH DEF 521/4" 445/8" 26			

 $^{{}^*\}textit{ Turn down is based on rear burner being turned off.}$



Ultra High Definition Log Set



Rustic Brick Liner



Ledgestone Liner









- Top Firebox Lighting (Log IPI Only)
- Adjustable Ember Bed Lighting (Log IPI Only)
- Clean Face Look No Louvers
- Millivolt / IPI
- Glass Size: 26¼" x 32½", 853¼ in²
- E-Coated Glass (Optional Ceramic Glass)
- Cool Surface System HDK Included
- 130 CFM Room Fan (with variable control)
- ClearView Safety Screen
- Limited Lifetime Warranty



Available Options

- Burner Options:
- Traditional Log Set
- Birch Log Set
- Driftwood Log Set
- Glass Burner with Diamond Glass
- Liner Options:
- Ceramic Brick Liner (Brown or Black)
- Herringbone Liner
- Ledgestone Liner
- Black Enameled Steel Liner
- Painted Steel Liner (Included)
- Surround Options:
- Slim Face in Painted Black (incl.), Powder Coated Grey, Powder Coated Silver, Powder Coated Bronze, Brushed Nickel, and Brushed Antique Copper
- Forgeworks Face

Fireplace Specifications

Theplace speeme	GICTOT I		
BTU Maximum Input - NG	3	0,000 BT	U
BTU Minimum Output*	15,000 BTU		
Heating Area	1,600 ft ²		
P4 Efficiency	69.8%		
Viewing Area	34½"h x 39"w		
Glass Size	261/	½"h x 32½	⁄2"W
Fireplace Install Dims.	HEIGHT 42"	WIDTH 41½"	DEPTH 181/4"







Birch Log Set



Driftwood Log Set

* Turn down is based on a 50% valve.





- Top Firebox Lighting (Log IPI Only)
- Adjustable Ember Bed Lighting (Log IPI Only)
- Clean Face Look No Louvers
- Millivolt / IPI
- Glass Size: 29³/₈" x 36¹/₂", 1072 in²
- Ceramic Glass
- Cool Surface System HDK Included
- ClearView Safety Screen
- 130 CFM Room Fan (with variable control)
- Limited Lifetime Warranty



Available Options

- Burner Options:
- Traditional Log Set
- Birch Log Set
- Driftwood Log Set
- Glass Burner with Diamond Glass
- Liner Options:
- Ceramic Brick Liner (Brown or Black)
- Herringbone Liner
- Ledgestone Liner
- Black Enameled Steel Liner
- Painted Steel Liner (Included)
- Surround Options:
- Slim Face in Painted Black (incl.), Powder Coated Grey,
 Powder Coated Silver, Powder Coated Bronze, Brushed
 Nickel, and Brushed Antique Copper
- Forgeworks Face

Fireplace Specifications

40,000 BTU			
20,000 BTU			
2,000 ft ²			
69.6%			
37¼"h x 42"w			
29¾"h x 36½"w			
HEIGHT WIDTH DEP 50" 4834" 23			
	37 ⁷ 29 ³ /	20,000 BT 2,000 ft ² 69.6% 371/4"h x 42 293/8"h x 361	

^{*} Turn down is based on a 50% valve.



Top Firebox Lighting



Diamond Glass Burner



Traditional Log Set









- Top Firebox Lighting (Log IPI Only)
- Adjustable Ember Bed Lighting (Log IPI Only)
- Clean Face Look No Louvers
- IPI Valve
- Glass Size: 30½" x 43½", 1326¾ in²
- Ceramic Glass
- Cool Surface System HDK Included
- ClearView Safety Screen
- Run-Quiet Fan System
- Limited Lifetime Warranty



Available Options

- Burner Options:
- Traditional Log Set
- Birch Log Set
- Driftwood Log Set
- Glass Burner with Diamond Glass
- Liner Options:
- Ceramic Brick Liner (Brown or Black)
- Herringbone Liner
- Ledgestone Liner
- Black Enameled Steel Liner
- Painted Steel Liner (Included)
- Surround Options:
- Slim Face in Painted Black (incl.), Powder Coated Grey,
 Powder Coated Silver, Powder Coated Bronze, Brushed
 Nickel, and Brushed Antique Copper
- Forgeworks Face

Fireplace Specifications

1 1				
BTU Maximum Input - NG	48,000 BTU			
BTU Minimum Output*	13,000 BTU			
Heating Area	2,200 ft ²			
P4 Efficiency	72.8%			
Viewing Area	39¼"h x 50"w			
Glass Size	30½"h x 43½"w			
Fireplace Install Dims.	HEIGHT 50"	WIDTH 55"	DEPTH 231/4"	










Traditional Log Set

* Turn down = 33% Valve with Split Flow activated x P4 Efficiency

Cool Surface System

INCLUDED WITH THE G SERIES

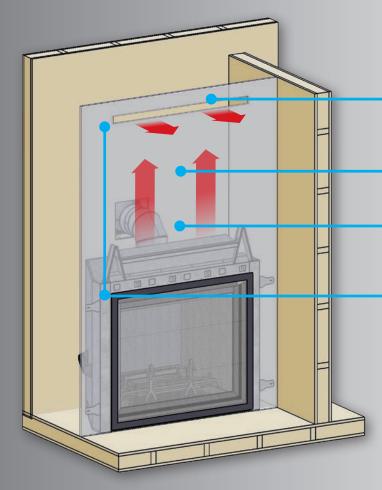

Convective heat that rises from the fireplace is captured in the chase and channeled through the vent using the Cool Surface System.

The Cool Surface System channels rising heat behind the wall.

Allows up to 1" thick combustible material (ie: drywall) to be used.

The Cool Surface System and vent bezel are included with every G Series unit.

We understand that surface temperatures are an important factor when considering how a fireplace will affect HDTVs or any framed decorations that might be mounted above. Heat rises naturally and with that in mind, every Enviro G Series Gas Fireplace comes equipped with our exclusive Cool Surface System.

We designed this system to help channel excess rising heat up behind the wall and safely push it through an included vent bezel bypassing any valuables above your G Series fireplace.

Power Vent Kit OPTIONAL FOR THE G SERIES

- *A minimum venting run of 10 feet*
- *A maximum venting run of 110 feet*
- Max of 6 elbows in vent configuration
- Venting can run downward 4' below the unit
- Flush mount (paintable) termination
- All stoves EXCEPT the G39 require part #50-2321 (Or you can order part #58DVA-X46 directly from DuraVent) vent reducer (5 x 8" vent reduced to 4 x 6 5/8" vent)
- Utilizes smaller 4 x 6 5/8" venting
- Run Quiet Fan System (noise reduction)






G Series Surrounds



SLIM SURROUND (G42 pictured with a Painted Black Finish) Available for the G39, G42, and G50



Painted Black



Powder Coated Grey



Powder Coated Silver



Powder Coated Bronze



Brushed Nickel



Brushed Antique Copper



FORGEWORKS SURROUND (G42 pictured) Available for the G39, G42, and G50



Midnight Bronze

G Series Design Elements

G SERIES FIREBOX LINERS



CERAMIC BRICK LINER Available for the G39, G42, and G50



HERRINGBONE LINER Available for the G39, G42, and G50



LEDGESTONE LINER Available for the G39, G42, and G50 Available for the G39, G42, and G50



BLACK ENAMELED STEEL LINER



PAINTED STEEL LINER Included with the G39, G42, and G50

G SERIES BURNER STYLES



GLASS BURNER WITH DIAMOND GLASS Available for the G39, G42, and G50



DRIFTWOOD LOG SET Available for the G39, G42, and G50



TRADITIONAL LOG SET Available for the G39, G42, and G50



BIRCH LOG SET Available for the G39, G42, and G50

Q Series Surrounds

Q1 GAS FIREPLACE SURROUNDS







MINIMAL SURROUND



4-SIDED MINIMAL SURROUND



VICTORIAN FACE
(Not ZC Compatible)

Available in Painted Black or Antique Bronze
Optional back panel available

Q2 GAS FIREPLACE SURROUNDS



SLIM FACE Included



FORGEWORKS FACE
Midnight Bronze

Q3 GAS FIREPLACE SURROUNDS



SLIM FACE Included



FORGEWORKS FACE
Midnight Bronze



LATTICE FACE

Q Series Design Elements

Q SERIES FIREBOX LINERS



CERAMIC BRICK LINER

Ceramic Brick available for the Q1,
Q2, and Q3 Rustic Ceramic Brick
available for the Q4



HERRINGBONE LINERAvailable for the Q2



LEDGESTONE LINERAvailable for the Q1, Q3, and Q4



BLACK ENAMELED STEEL LINERAvailable for the Q1, Q2, Q3, and Q4

Q SERIES BURNER STYLES



GLASS BURNER W/DIAMOND GLASS

Available for the Q1 and Q2



COAL BURNERAvailable for the Q1



CLASSIC LOG SETAvailable for the Q1



TRADITIONAL LOG SETAvailable for the Q2 & Q3



ULTRA HIGH DEFINITION LOG SETAvailable for the Q4



DRIFTWOOD LOG SETAvailable for the Q2

Q Series Options

Firebox Liners	Q1 GAS FIREPLACE	Q2 GAS FIREPLACE	Q3 GAS FIREPLACE	Q4 GAS FIREPLACE
Ceramic Brick Liner	Included (Log & Coal)	Optional	Optional	
Rustic Ceramic Brick Liner				Optional
Black Enameled Steel Liner	Optional, inc. w/Q1G	Optional, inc. w/Q2G	Optional	Optional
Ledgestone Liner	Optional		Optional	Optional
Herringbone Liner		Optional		
Painted Steel Firebox		Included		

Fireplace Surrounds	Q1 GAS FIRE		Q2 GAS FIRE		Q3 GAS FIRE		Q4 GAS FIREPLACE
Minimal Surround*	HEIGHT 263/8"	WIDTH 22 3/4"	HEIGHT	WIDTH	HEIGHT	WIDTH	
Victorian Face (Not ZC Compatible)	30½"	30"					
Minimal Surround Four-Sided	27 ½"	241/4"					
Modern Surround*	30"	30"					
Slim Face			287/8"	32¾"	32"	32¾"	
Lattice Face					32 1/4"	321/4"	
Forgeworks Face			291/4"	33 7/8"	32 7/8"	35 1/8"	

 $^{{}^*\,} In\, Combination\, with\, the\, Q2, these \, surrounds\, are\, compatible\, with\, the\, Glass\, Burner\, or\, Driftwood\, Log\, Set$

Burner Variations	Q1 GAS FIREPLACE	Q2 GAS FIREPLACE	Q3 GAS FIREPLACE	Q4 LARGE GAS FIREPLACE
Classic Log Set	Optional			
Ultra High Definition Log Set				Included
Traditional Log Set		Included	Included	
Driftwood Log Set		Optional		
Glass Burner with Diamond Glass	Top vent only	Top vent only		
Coal Burner	Optional			

Additional Options	Q1 GAS FIREPLACE	Q2 GAS FIREPLACE	Q3 GAS FIREPLACE	Q4 GAS FIREPLACE
Heat Distribution Kit				Optional
Power Vent Kit				Optional
150 CFM Run Quiet Fan System	Included	Included with IPI	Included	
Programmable Thermostat	Optional	Optional	Optional	
Proflame Remote Control	Included with IPI	Included with IPI	Included with IPI	Included with IPI
Profiame Remote Control	Included with IPI	Included with IPI	Included with IPI	Included with IPI

G Series Options

Firebox Liners	G39 GAS FIREPLACE	G42 GAS FIREPLACE	G50 GAS FIREPLACE
Ceramic Brick Liner	~	~	✓
Herringbone Liner	~	~	✓
Black Enameled Steel Liner	~	~	✓
Ledgestone Liner	~	~	✓
Painted Steel Liner	Included	Included	Included

Fireplace Surrounds	G39 Gas fireplace		_	G42 GAS FIREPLACE		G50 GAS FIREPLACE	
Slim Face Surround	HEIGHT 33 ³ /4"	WIDTH 39"	HEIGHT 37"	WIDTH 42½"	HEIGHT 39 "	WIDTH 501/2"	
Forgeworks Surround	33¾"	39"	37"	421/2"	39"	50½"	

Burner Variations	G39 GAS FIREPLACE	G42 GAS FIREPLACE	G50 GAS FIREPLACE
Traditional Log Set	~	✓	~
Birch Log Set	~	✓	~
Driftwood Log Set	~	✓	~
Glass Burner with Diamond Glass	~	✓	✓

Additional Accents	G39 GAS FIREPLACE	G42 GAS FIREPLACE	G50 GAS FIREPLACE
Cool Surface System (HDK)	Built-in	Built-in	Built-in
Power Vent Kit	Optional	Optional	Optional
Ceramic Glass	Optional	Included	Included
Top Firebox Lighting (Log IPI Only)	~	✓	✓
Adjustable Ember Bed Lighting (Log IPI Only)	~	~	~
Programmable Thermostat	~	✓	~
Proflame Remote Control	Included with IPI	Included with IPI	Included with IPI

Q Series Specifications


G Series Specifications

Performance	Q1 GAS FIREPLACE	Q2 GAS FIREPLACE	Q3 GAS FIREPLACE	Q4 GAS FIREPLACE	Performance	G39 GAS FIREPLACE	G42 GAS FIREPLACE	G50 GAS FIREPLACE
BTU Maximum input - NG / LP	20,000 / 18,500	24,000 / 20,000	38,000 / 38,000	48,000 / 48,000	BTU Maximum input - NG / LP	30,000 / 30,000	40,000 / 40,000	48,000 / 48,000
Turn Down* - Valve 820 / Valve 885	50% / 33%	50% / 33%	50% / 33%	N/A / 67% (w/Split Flow)	Turn Down* - Valve 820 / Valve 885	50% / 33%	50% / 33%	67.5% w/Split flow
Heat Exchanger	✓	~	✓		Heat Exchanger	✓	✓	✓
SIT Valve 820 (Standing Pilot)	Available	Available	Available	N/A	SIT Valve 820 (Standing Pilot)	Available	Available	N/A
SIT Valve 885 (IPI)	Available	Available	Available	Standard	SIT Valve 885 (IPI)	Available	Available	Standard
Split Flow Burner	N/A	N/A	N/A	Standard	Split Flow Burner	N/A	N/A	Standard
Efficiency - Steady State**	76.1%	70.7%	71.6%	59%	Efficiency - Steady State**	71.37%	72.1%	75.7%
Efficiency - FE rating (P4) [†]	74.5%	69.3%	67.3%	57.7%	Efficiency - FE rating (P4)*	69.8%	69.6%	72.8%
Glass Size	17½" x 19¾", 345½ in²	28.6" x 23.85", 682 in ²	28" x 30", 840 in ²	341/4" x 30", 10271/2 in ²	Glass Size	26¼" x 32½", 853¼ in²	29³/8" x 36½", 1072 in²	30½" x 43½", 1326¾ in²
150 CFM Run-Quiet Fan System	~	Optional on Standing Pilot Included with IPI	~	N/A	Run-Quiet Fan System	130 сғм	130 сғм	130 сғм
Installation	Q1 GAS FIREPLACE	Q2 GAS FIREPLACE	Q3 GAS FIREPLACE	Q4 GAS FIREPLACE	Installation	G39 GAS FIREPLACE	G42 GAS FIREPLACE	G50 GAS FIREPLACE
Fireplace Dimensions w/Screen (HWD)	HEIGHT WIDTH DEPTH 35 1/4" 25 1/4" 17 1/2"	HEIGHT WIDTH DEPTH 40" 345%" 157%"	HEIGHT WIDTH DEPTH 43 ½" 34 5%" 18"	HEIGHT WIDTH DEPTH 52 1/4" 44 5/8" 26"	Fireplace Dimensions w/Screen (HWD)	HEIGHT WIDTH DEPTH 42" 41 1/2" 18 1/4"	HEIGHT WIDTH DEPTH 50" 483/4" 231/4"	HEIGHT WIDTH DEPTH 50" 55" 231/4"
Venting Collar Size	4" x 6 5/8"	4" x 6 5/8"	4" x 6 5/8"	5" x 8"	Venting Collar Size	4/7" Flex & 6 5/8" Rigid	5/8" Flex & Rigid	5/8" Flex & Rigid
Venting Orientation	Top / Rear	Top / Rear	Top / Rear	Top / Rear	Venting Orientation	Тор	Тор	Тор
LP Conversion Kit (Standing Pilot)	Standard	Standard	Standard	N/A	LP Conversion Kit (Standing Pilot)	Included	Included	N/A
Weight (lbs)	110 lbs	155 lbs	192 lbs	320 lbs	Weight (lbs)	192 lbs	250 lbs	280 lbs

Clearance to Combustibles	Q1	Q2	Q3	Q4
A - center of unit to side wall	161/2"	21 7/8"	26 1/4"	28½"
B - bottom of unit to bottom of 12" mantle	41"	49"	461/2"	541/4"
C - unit bottom to max. 3/4" combustible facing	35 1/4"	40"	43 ½"	80"
D - center of unit to side facing	10"	17½"	17 5/16"	181/2"
E - front of door to edge of floor protection	12"	N/A	N/A	12 ½"

A

Clearance to Combustibles **G42 G50 G**39 A - Side of unit to side wall B - Minimum clearance to ceiling 72" 78" C - Minimum clearance to mantle height 45" 451/4" D - Minimum clearance to mantle depth E - Front of door to edge of floor protection F - Minimum clearance to alcove width 52" 631/2"



^{*} Turn down based on P4 efficiencies on low.


^{**} Steady state rating based on conventional venting configuration.

[†] Efficiency based on the P4-15 measured efficiency rating of the IPI models


Unit Dimensions

Q1

Gas Fireplace

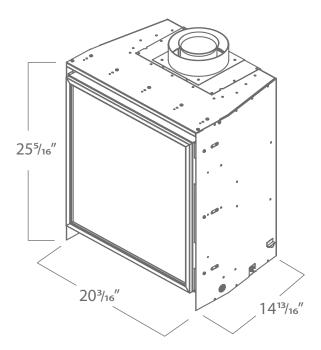


Q3Gas Fireplace

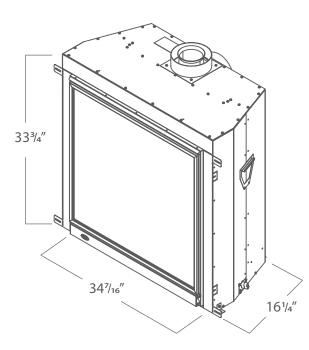


Q2

Gas Fireplace

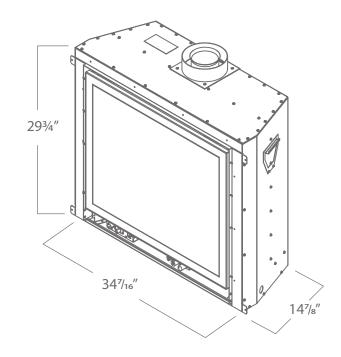


Q4

Gas Fireplace

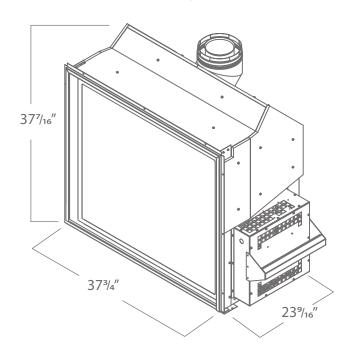


G39

Gas Fireplace

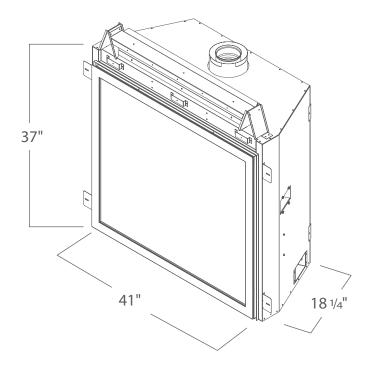


G42

Gas Fireplace

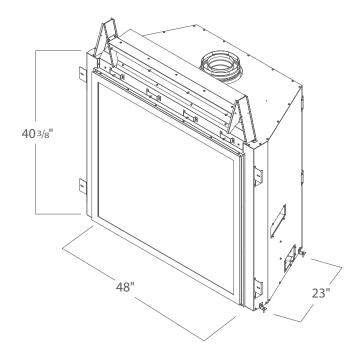

G50

Gas Fireplace

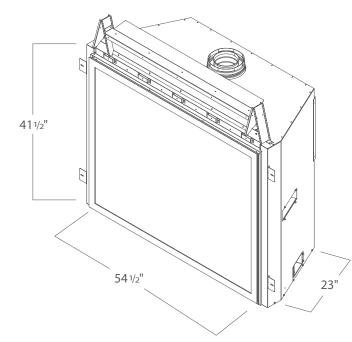

The best way to visualize your dream fireplace at home is with the Enviro App!























Please share and recycle this brochure