



DESIGNED TO HEAT.
BUILT TO LAST.

GAS


FIREPLACES





Enviro

HEARTH PRODUCTS

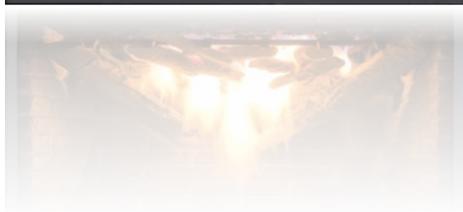

Designed to heat. Built to Last.

For over 25 years, unsurpassed quality and craftsmanship have made us an industry leader in innovative heating systems. Design, functionality, and efficiency merge to create exceptional products that will exceed all expectations. Whether time-honored traditional or bold and modern, our dynamic range of products will compliment any home décor. With a complete line of fireplace inserts, zero-clearance fireplaces, and freestanding stoves, we have the perfect solution for your heating requirements. We won't just meet your expectations; we'll exceed them...



Designed to heat. Built to last.





Q1 Fireplace – Minimal Surround, Glass Burner with Porcelain Liner



Q1 Fireplace – Clean Face Kit, Log Burner with Brick Liner



Q1 Fireplace Insert – Modern Surround, Coal Burner, Ledgestone Liner

Design Features

- Clean Face Look — No Louvers
- SIT Valve 820 (Standing Pilot)
- SIT Valve 885 (IPI System with Remote)
- Glass Size: 17½" x 19¾", 345½ in²
- Hand Welded Firebox
- 150 CFM Room Fan (with variable control)
- Limited Lifetime Warranty
- Quick Access Valve Controls

Available Options

- Remote or Thermostat Control
- Burner Options:
 - High Definition Log Set
 - Tray Burner with Crushed Glass
 - Coal Burner
- Liners Options:
 - Ceramic Brick Liner
 - Ledgestone Liner
 - Black Enameled Steel Liner
- Surround Options:
 - Modern Surround
 - Minimal Surround
 - Four Sided Minimal Surround

Fireplace Specifications

BTU Maximum Input - NG	20,000 BTU		
BTU Minimum Output*	7,900 BTU		
Heating Area	1,100 ft ²		
P4 Efficiency	74.5%		
Glass Size	345½ in ²		
Fireplace Install Dims.	HEIGHT 35¼"	WIDTH 25¼"	DEPTH 17½"

* Turn down is based on a 50% valve and AFUE efficiencies output.



High Definition Log Set



Coal Burner



High Efficiency Heat Exchanger



Q2 Fireplace – Log Set with Porcelain Liner



Q2 Fireplace – Modern Surround, Log Set with Brick Liner



Q2 Fireplace – Minimal Surround, Glass Burner Porcelain Liner

Design Features

- Clean Face Look — No Louvers
- SIT Valve 820 (Standing Pilot)
- SIT Valve 885 (IPI System with Remote)
- Glass Size: 28" x 23", 644 in²
- Hand Welded Firebox
- 150 CFM Room Fan (with variable control)
- Limited Lifetime Warranty

Available Options

- Remote or Thermostat Control
- Optional 150 CFM Room Fan
- Burner Options:
 - High Definition Log Set
 - Tray Burner with Crushed Glass
- Liners Options:
 - Painted Black Firebox - Standard
 - Ceramic Brick Liner
 - Black Enameled Steel Liner
- Surround Options:
 - Modern Surround
 - Minimal Surround

Fireplace Specifications

BTU Maximum Input - NG	24,000 BTU						
BTU Minimum Output*	8,000 BTU						
Heating Area	1,400 ft ²						
P4 Efficiency	67%						
Glass Size	644 in ²						
Fireplace Install Dims.	<table border="1"> <tr> <th>HEIGHT</th> <th>WIDTH</th> <th>DEPTH</th> </tr> <tr> <td>40"</td> <td>34⁵/₈"</td> <td>15⁷/₈"</td> </tr> </table>	HEIGHT	WIDTH	DEPTH	40"	34 ⁵ / ₈ "	15 ⁷ / ₈ "
HEIGHT	WIDTH	DEPTH					
40"	34 ⁵ / ₈ "	15 ⁷ / ₈ "					

* Turn down is based on a 50% valve and AFUE efficiencies output.



High Definition Log Set



Tray Burner with Crushed Glass



High Efficiency Heat Exchanger



Q3 Fireplace – Log Set with Brick Liner and Forgeworks Face



Q3 Fireplace – Log Set with Ledgestone Liner



Q3 Fireplace – Log Set with Porcelain Liner and Minimal Surround

Design Features

- Clean Face Look — No Louvers
- SIT Valve 820 (Standing Pilot)
- SIT Valve 885 (IPI System with Remote)
- Glass Size: 28" x 30", 840 in²
- Hand Welded Firebox
- High Efficiency Heat Exchanger
- 150 CFM Room Fan (with variable control)
- Adjustable Rear Vent
- Limited Lifetime Warranty

Available Options

- Remote or Thermostat Control
- Burner Options:
 - High Definition Log Set
- Liners Options:
 - Ceramic Brick Liner
 - Black Enameled Steel Liner
- Surround Options:
 - Minimal Surround
 - Modern Surround
 - Lattice Face
 - Forgeworks Face

Fireplace Specifications

BTU Maximum Input - NG	38,000 BTU		
BTU Minimum Output*	13,870 BTU		
Heating Area	2,000 ft ²		
P4 Efficiency	67.3%		
Glass Size	840 in ²		
Fireplace Install Dims.	HEIGHT 43½"	WIDTH 34¾"	DEPTH 18"

* Turn down is based on a 50% valve and AFUE efficiencies output.



Ceramic Brick Liner w/Log Set



Cast Iron Grate



High Efficiency Heat Exchanger



Q4 Fireplace – Log Set with Ledgestone Liner



Q4 Fireplace – Log Set with Porcelain Liner



Q4 Fireplace – Log Set with Rustic Brick Liner

Design Features

- Clean Face Look — No Louvers
- SIT Valve 885 (IPI System with Remote)
- 67% Burner Turn Down
- Glass Size: 34¼" x 30", 1027½ in²
- Hand Welded Firebox
- Cast Iron Log Grate
- Limited Lifetime Warranty

Available Options

- Power Vent Kit
- Heat Distribution Kit
- Burner Options:
 - Ultra High Definition Log Set
- Liners Options:
 - Rustic Brick Liner
 - Ledgestone Liner
 - Black Enameled Steel Liner

Fireplace Specifications

BTU Maximum Input - NG	48,000 BTU						
BTU Minimum Output*	16,000 BTU						
Heating Area	2,000 ft ²						
SS Efficiency	79%						
Glass Size	1027½ in ²						
Fireplace Install Dims.	<table border="1"> <thead> <tr> <th>HEIGHT</th> <th>WIDTH</th> <th>DEPTH</th> </tr> </thead> <tbody> <tr> <td>52¼"</td> <td>44¾"</td> <td>26"</td> </tr> </tbody> </table>	HEIGHT	WIDTH	DEPTH	52¼"	44¾"	26"
HEIGHT	WIDTH	DEPTH					
52¼"	44¾"	26"					

* Turn down is based on rear burner being turned off.



Ultra High Definition Log Set



Rustic Brick Liner



Ledgestone Liner

Surround Panels

Q1 GAS FIREPLACE SURROUNDS



MODERN SURROUND



MINIMAL SURROUND



4-SIDED MINIMAL SURROUND

Q2 GAS FIREPLACE SURROUNDS



MINIMAL SURROUND



MODERN SURROUND

Q3 GAS FIREPLACE SURROUNDS



MINIMAL SURROUND




FORGEWORKS FACE



LATTICE FACE

Design Elements

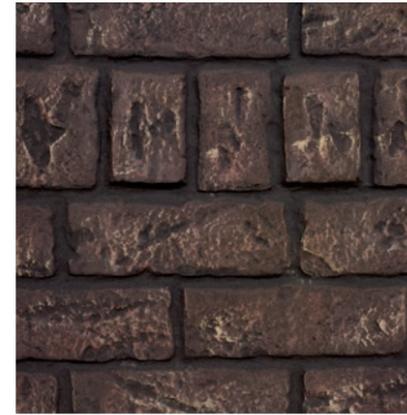


CERAMIC BRICK LINER

Available for the Q1, Q2, and the Q3



RUSTIC CERAMIC BRICK LINER

Available for the Q4

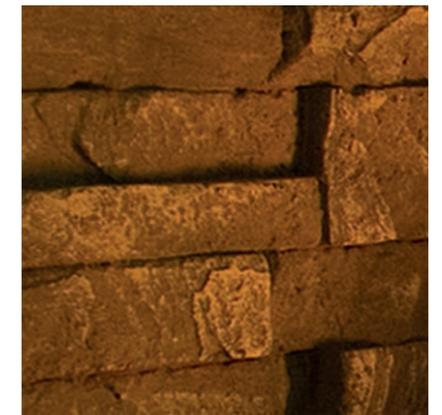

LEDGESTONE LINER

Available for the Q1 and Q4



BLACK ENAMELED STEEL LINER

Available for the Q1, Q2, Q3, and the Q4



HIGH DEFINITION LOG SET

Available for the Q1, Q2, and the Q3



ULTRA HIGH DEFINITION LOG SET

Available for the Q4



TRAY BURNER WITH GLASS

Available for the Q1 and Q2



COAL BURNER

Available for the Q1



HEARTH REMOTE

Available for the Q1, Q2, Q3, and the Q4 (IPI only)

Unit Specifications

Performance


	Q1 PORTRAIT GAS FIREPLACE	Q2 MEDIUM GAS FIREPLACE	Q3 MEDIUM GAS FIREPLACE	Q4 LARGE GAS FIREPLACE
BTU Maximum input - NG / LP	20,000 / 18,500	24,000 / 20,000	38,000 / 38,000	48,000 / 48,000
Turn Down* - Valve 820 / Valve 885	50% / 33%	50% / 33%	50% / 33%	N/A / 67%
Heat Exchanger	✓	✓	✓	✓
SIT Valve 820 (Standing Pilot)	Available	Available	Available	
SIT Valve 885 (IPI)	Available	Available	Available	Available
Efficiency - Steady State**	76%	70%	75%	79%
Efficiency - AFUE	67%	66%	70%	72%
Efficiency - FE rating†	74.5%	67%	67.3%	63%
Glass Size	17½" x 19¾", 345½ in²	28" x 23", 644 in²	28" x 30", 840 in²	34¼" x 30", 1027½ in²
Convection Fan	150 CFM	Optional	150 CFM	

Installation

	Q1 PORTRAIT GAS FIREPLACE			Q2 MEDIUM GAS FIREPLACE			Q3 MEDIUM GAS FIREPLACE			Q4 LARGE GAS FIREPLACE		
Fireplace Dimensions w/Screen (HWD)	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH
Fireplace Dimensions w/Screen (HWD)	35¼"	25¼"	17½"	40"	34⅝"	15⅞"	43½"	34⅝"	18"	52¼"	44⅝"	26"
Venting Collar Size	4" x 6⅝"			4" x 6⅝"			4" x 6⅝"			5" x 8"		
Venting Orientation	Top / Rear			Top / Rear			Rear			Top / Rear		
LP Conversion Kit (Standing Pilot)	Standard			Standard			Standard			Optional		
Weight (lbs)	110 lbs			155 lbs			192 lbs			320 lbs		

Clearance to Combustibles

	Q1	Q2	Q3	Q4
A - center of unit to side wall	16½"	21⅞"	26¼"	28½"
B - bottom of unit to bottom of 12" mantle	41"	49"	46½"	54¼"
C - unit bottom to max. ¾" combustible facing	35¼"	40"	43½"	80"
D - center of unit to side facing	10"	17½"	17⅝"	18½"
E - front of door to edge of floor protection	12"	N/A	N/A	12½"

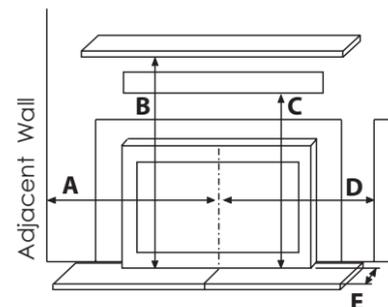

* Turn down based on AFUE efficiencies on low.

** Steady state rating based on conventional venting configuration.

† Efficiency based on the P4 measured efficiency rating of the IPI models

Available Options

Surround Panels

	Q1 PORTRAIT GAS FIREPLACE		Q2 MEDIUM GAS FIREPLACE		Q3 MEDIUM GAS FIREPLACE	
Minimal Surround	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH
Minimal Surround	26⅜"	22¾"	28¾"	33¼"	33⅞"	33¾"
Minimal Surround Four-Sided	26⅜"	22¾"				
Modern Surround	30"	30"	30½"	37"		
Trimmable Panel	32"	36"				
Lattice Face					32¼"	32¼"
Forgeworks Face					32⅞"	32⅞"

Firebox Liners

	Q1 PORTRAIT GAS FIREPLACE	Q2 MEDIUM GAS FIREPLACE	Q3 MEDIUM GAS FIREPLACE	Q4 LARGE GAS FIREPLACE
Ceramic Brick Liner	Included	Optional	Included	
Rustic Ceramic Brick Liner				Optional
Black Enameled Steel Liner	Optional	Optional	Optional	Optional
Ledgestone Liner	Optional			Optional
Painted Black Firebox		Standard		

Burner Variations


	Q1 PORTRAIT GAS FIREPLACE	Q2 MEDIUM GAS FIREPLACE	Q3 MEDIUM GAS FIREPLACE	Q4 LARGE GAS FIREPLACE
High Definition Log Set Burner	Optional	Optional	Standard	
Ultra High Definition Log Set Burner				Standard
Tray Burner with Crushed Glass	Top vent only	Top vent only		
Coal Burner	Optional			

Additional Options


	Q1 PORTRAIT GAS FIREPLACE	Q2 MEDIUM GAS FIREPLACE	Q3 MEDIUM GAS FIREPLACE	Q4 LARGE GAS FIREPLACE
Heat Distribution Kit				Optional
Power Vent Kit				Optional
Programmable Thermostat	Optional	Optional	Optional	
Proflame Remote Control	Included with IPI	Included with IPI	Included with IPI	Included with IPI

Unit Dimensions


Q1
Gas Fireplace

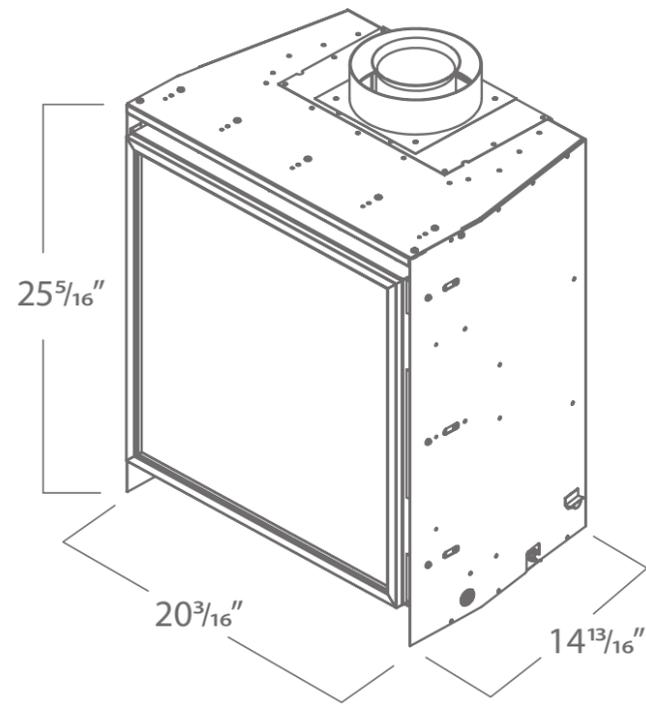


Q3
Gas Fireplace

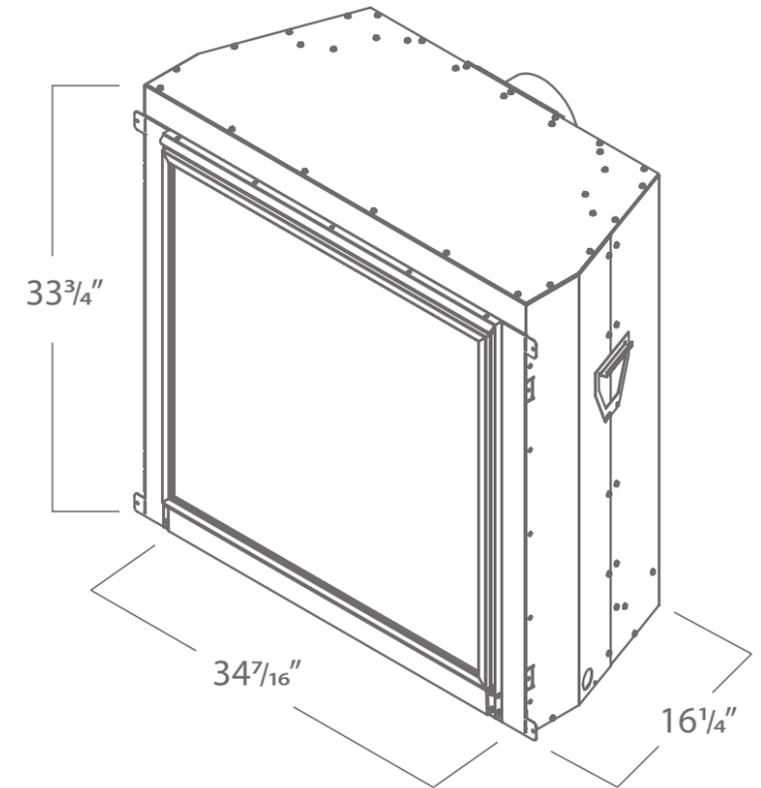

Q2
Gas Fireplace

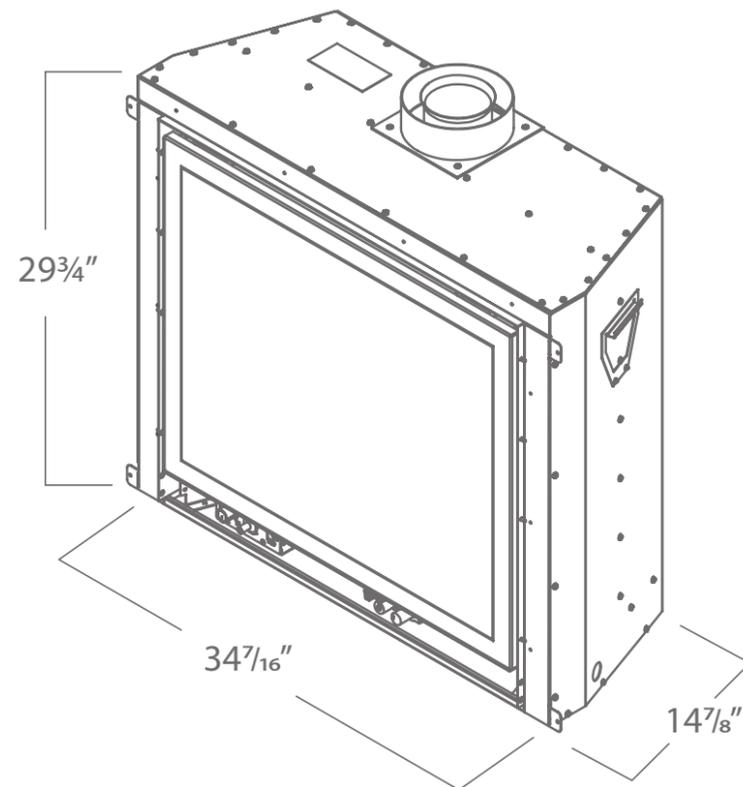

Q4
Gas Fireplace

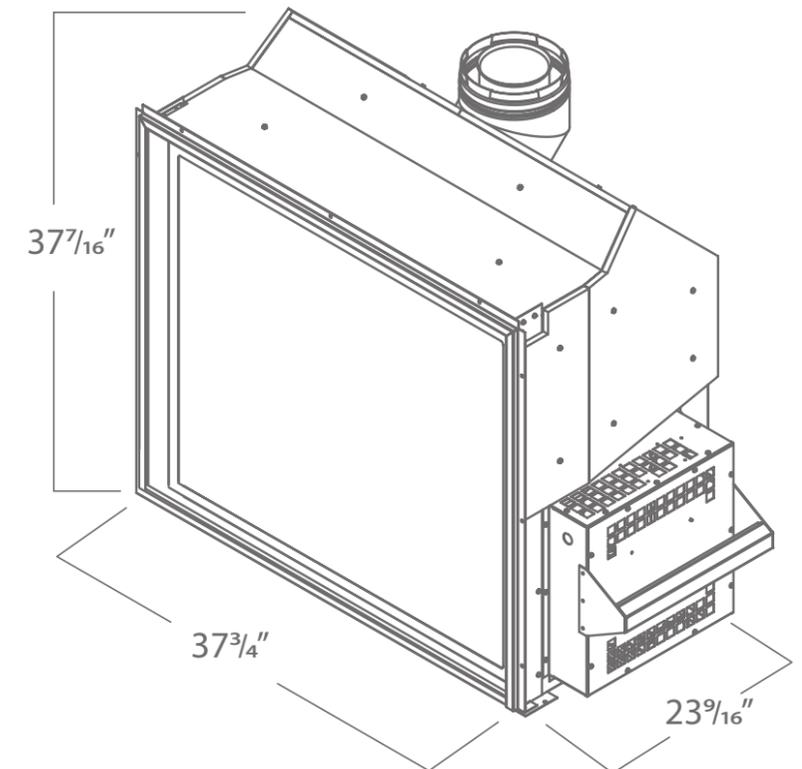




Learn more about our products at


enviro.com

- Detailed Product Lineup
- Model Photo Galleries
- Downloadable Manual PDF's
- Unit Comparison Charts
- Youtube Burn Example Videos
- Online Brochures
- Dealer Locator Tool



A flame that **looks** as good as it **feels**.

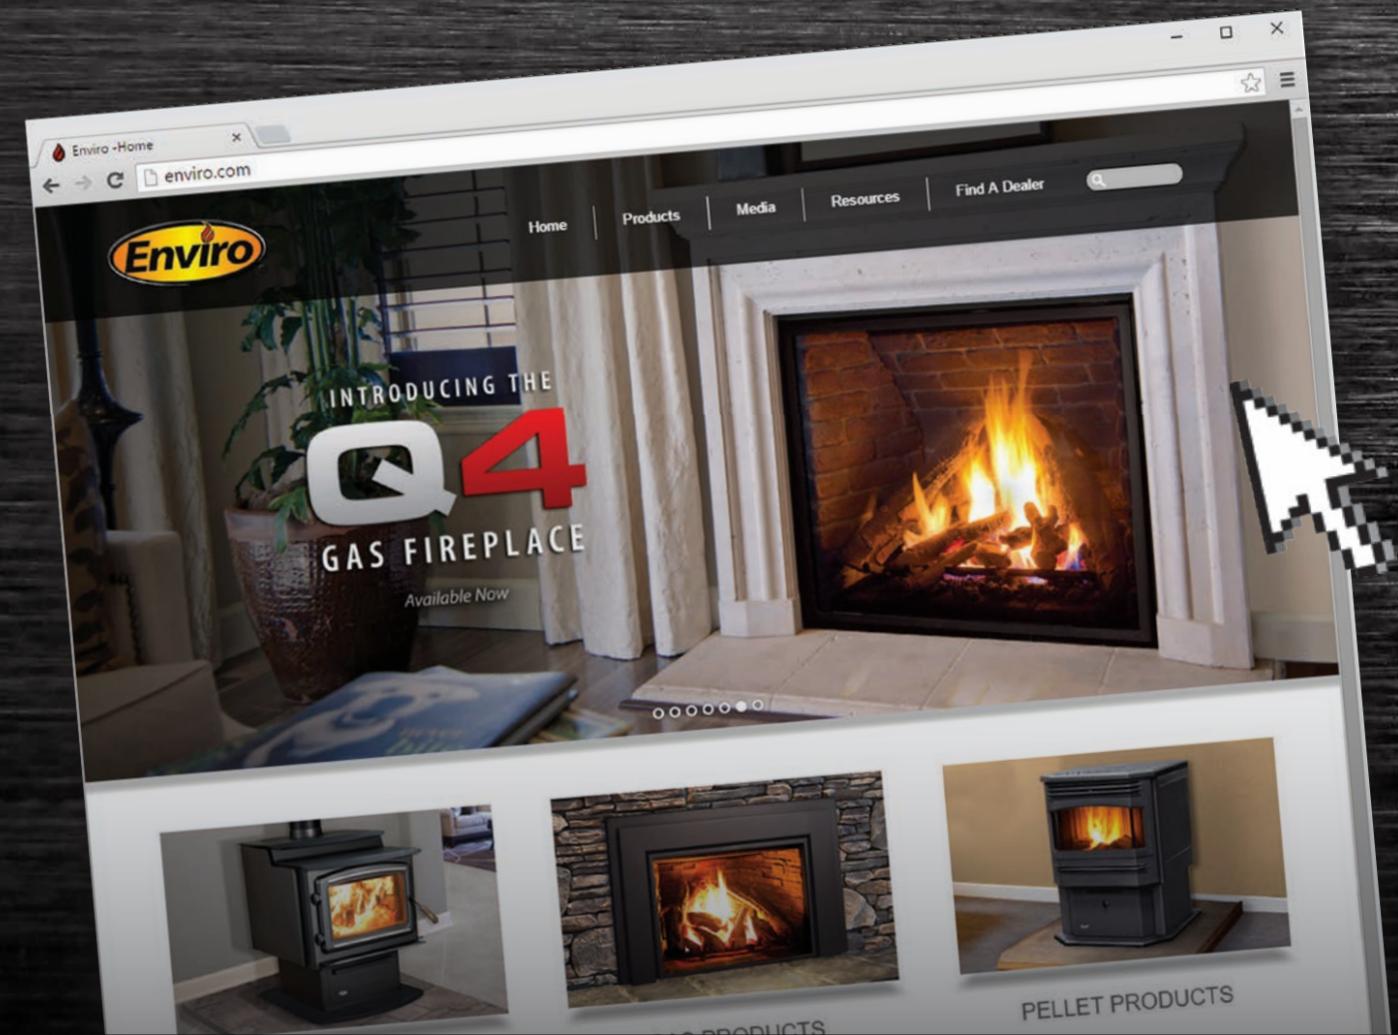



Manufactured by Sherwood Industries Ltd • Victoria, BC, Canada
enviro.com • info@enviro.com • Printed in Canada, March 2016



Please share and
recycle this brochure