



SPEC SHEET
PRODIGY
 PC3 & PC3ST



LINEAR GAS FIREPLACE

DIMENSIONS

PART	ACTUAL	FRAMING
FRONT WIDTH	40 1/4"	42 1/4"
BACK WIDTH	40 1/4"	42 1/4"
HEIGHT	23 1/4"*	26 3/16"
DEPTH	19 7/8"	18 5/8"
VIEWING AREA	36" X H"	N/A

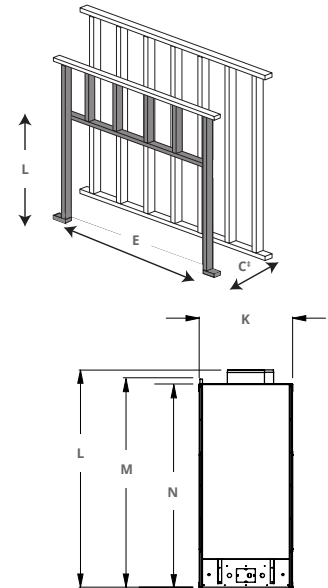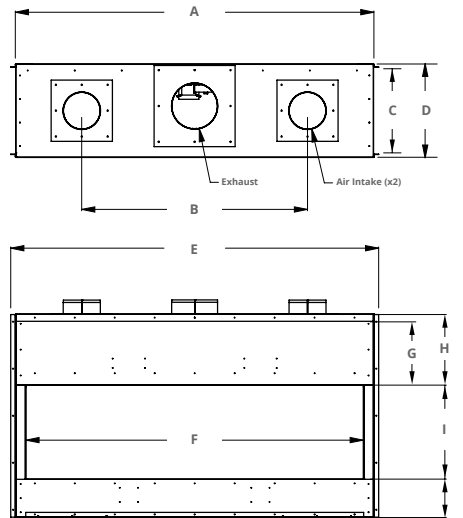

FEATURES

- COOL-Pack system allows for all glass barriers, no screens required
- Zero clearance
- Multi-color LED lighting
- Up to 15,000 BTU/H per linear foot
- Customizable media options
- Electronic ignition
- Compatible with home automation systems

	AIR INTAKE	EXHAUST	A	B	C	D	E	F	G	H	I
3'	2x6"	8"	40 1/4"	24"	18 5/8"	19 7/8"	42 1/4"	36"	15 1/8"	16 1/8"	12", 20", 30", 36", 60"
4'	2x8"	10"	52 1/4"	32"			54 1/4"	48"			
5'			64 1/4"	40"			66 1/4"	60"			
6'			76 1/4"	48"			78 1/4"	72"			
7'	2x10"	12"	88 1/4"	56"	90 1/4"	84"					
8'			100 1/4"	60"	102 1/4"	96"					

	J	K	L	M	N
3'	8 1/8"	19 7/8"	26 3/16" + Glass Height	24 1/4" + Glass Height	23 1/4" + Glass Height
4'					
5'					
6'					
7'					
8'					

*If the framing must be built in advance, the opening for the fireplace should be increased by 5" in each direction so that the fireplace can be maneuvered into position

Single sided framing layout shown, see install manual for see-through layout, same dimensions still apply.

TECHNICAL SPECIFICATIONS

Prodigy units Come standard with:

- Ebony firestones or Star Ice fireglass
- Intake and exhaust air dampers
- 50' control and damper control cable
- Multi-color LED lighting

Prodigy options:

- Designer speckled stones, driftwood, firestones, or fireglass
- Indoor-Outdoor seal kit for see through units
- Reflective glass panels
- Multiple power vent options
- Passive or powered COOL-Pack glass system