



**nolafire**

**NF30** GAS FIREPLACE INSERT

*High Definition Ceramic Log Set*

# NF30 GAS FIREPLACE INSERT

Black Diamond Glass

## Fireplace Details

BTU Maximum Input	33,000 BTU
BTU Minimum Output*	18,100 BTU
Heating Area	1,700 ft <sup>2</sup>
Energuide FE Rating (P4)	71.4%
Steady State Efficiency**	78%
Weight	116 lbs

\* Calculated from a 33% Turndown x P4 Efficiency

\*\* Steady state rating based on conventional venting configuration.

## Clearance to Combustibles

A - center of unit to side wall	21"
B - bottom of unit to bottom of 12" mantle	36"
C - unit bottom to max. ¾" combustible facing	30"
D - center of unit to side facing	21"
E - front of door to edge of floor protection	16"

## Design Features

Clean Face Look — No Louvers

SIT Valve 885 (IPI System with Remote)

Glass Size: 26¼"w x 16"h, 420 in<sup>2</sup>


25"h | 38"w Surround Panel

Black Enameled Liner

150 CFM Room Fan (with variable control)

Two Burner Options

- High Definition Ceramic Log Set
- Black Diamond Glass

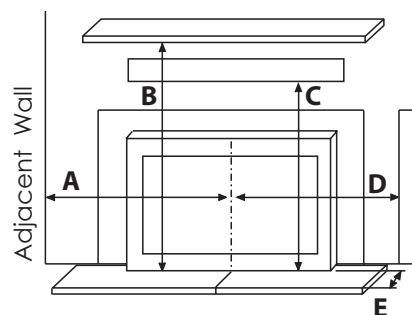



High Definition Ceramic Log Set



Black Diamond Glass

## Install Dimensions

Minimum Height	20"
Minimum Width	28"
Minimum Depth	18¼"

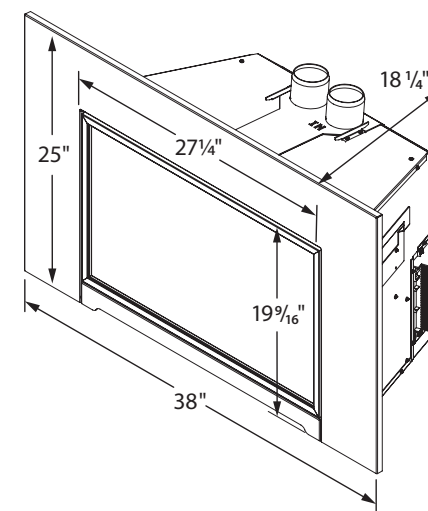

Proudly manufactured in Canada.

POP-325



nolafire