


g) Clearances to combustibles:

- Clearances to floor and ceiling:

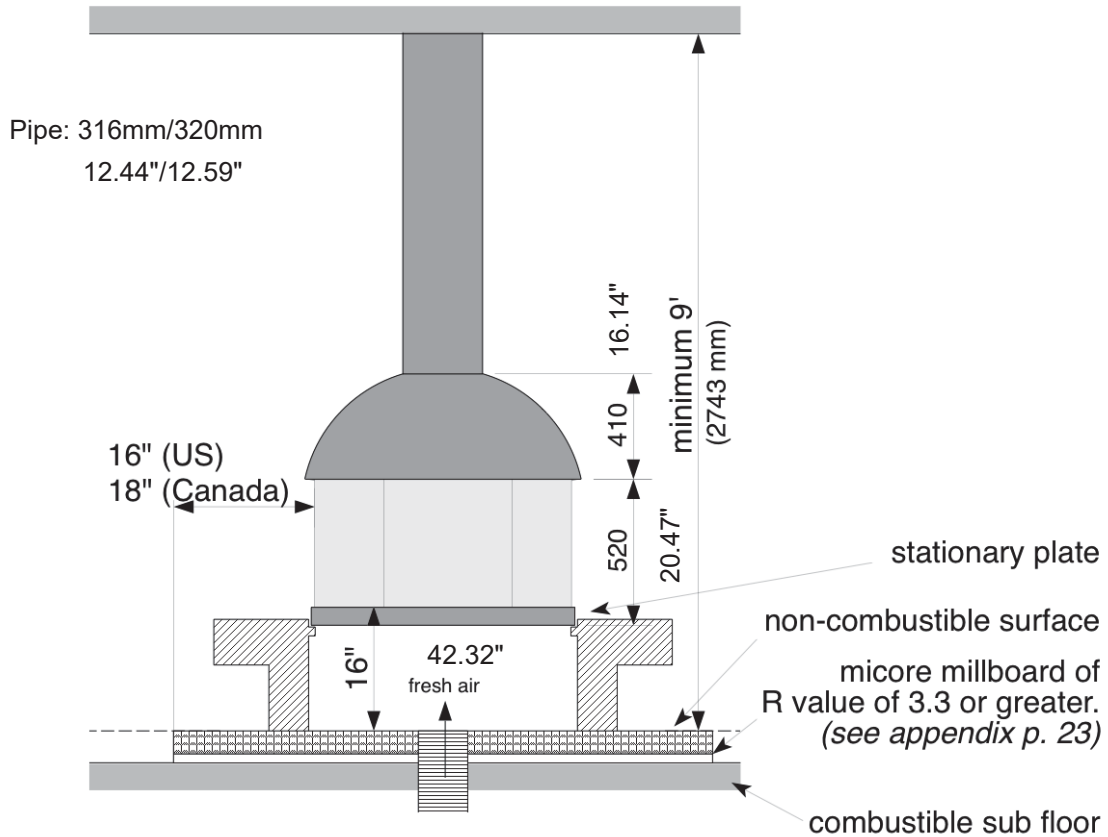

A MINIMUM CLEARANCE OF 16" FROM THE FLOOR TO THE TOP OF THE STATIONARY PLATE STRICTLY MUST APPLY.