


Please leave these reference guides at the installation location until the installation is finished. See owners manual for full installation and finishing instructions before making final decisions as information is subject to change.

Specifications (all measurements are in inches)



• GAS LINE OPENING: LEFT SIDE • ELECTRICAL ACCESS: RIGHT SIDE

| Model | BTU | Height | | Front Width | | Back Width | | Depth | | Glass Viewing Area |
|--------|----------------------------|--------|---------|-------------|---------|------------|---------|----------|---------|--------------------|
| | | Actual | Framing | Actual | Framing | Actual | Framing | Actual | Framing | |
| CLW-50 | 35,500 (NG) 35,000 (LP) | 39 | 44-1/2 | 59-1/2 | 64-1/2 | 59-1/2 | 64-1/2 | 18-15/16 | 22 | 49-7/8 x 13-3/8 |

Framing Opening

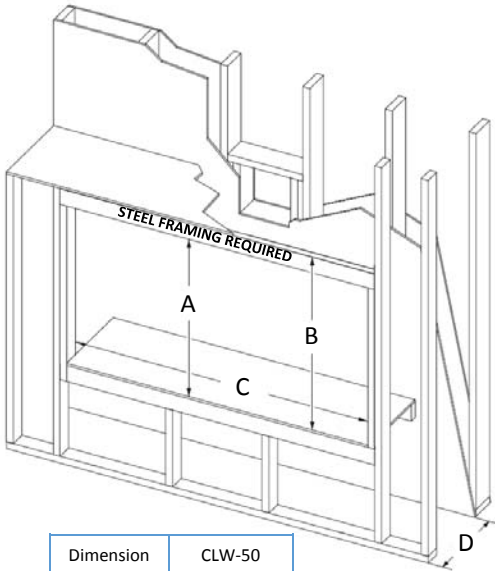


| Dimension | CLW-50 |
|-----------|--------|
| A | 44-1/2 |
| B | 48 |
| C | 64-1/2 |
| D | 22 |

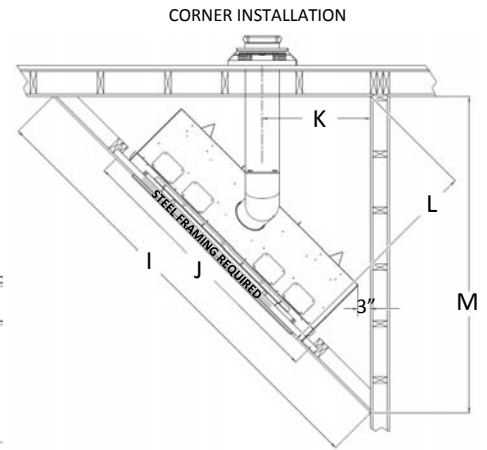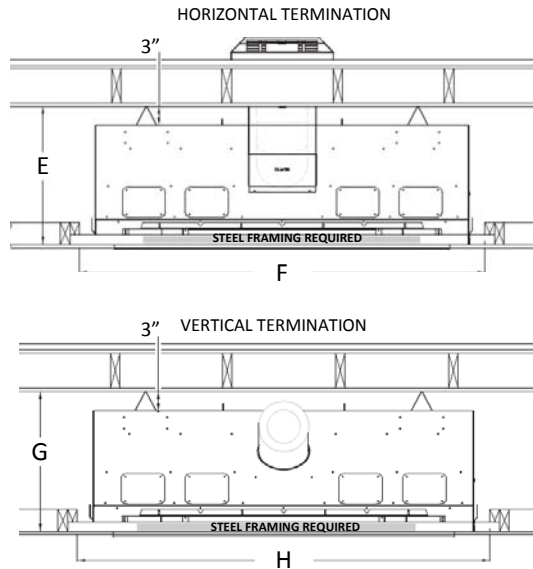

| E | F | G | H | I | J | K | L | M |
|----|--------|----|--------|-----------|--------|--------|---------|---------|
| 22 | 64-1/2 | 22 | 64-1/2 | 106-13/16 | 64-1/2 | 25-7/8 | 53-7/16 | 75-9/16 |

Recess Framing

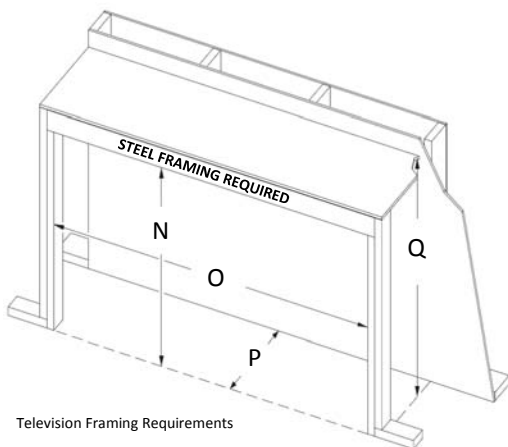


Television Framing Requirements

| Dimension | CLW-50 |
|-----------|--------|
| N | 44-1/2 |
| O | 64-1/2 |
| P | 22 |
| Q | 48 |

Mantel Clearances

▨ NON-COMBUSTIBLE ZONE

MANTEL PROJECTION:
Each square represents 1" of projection

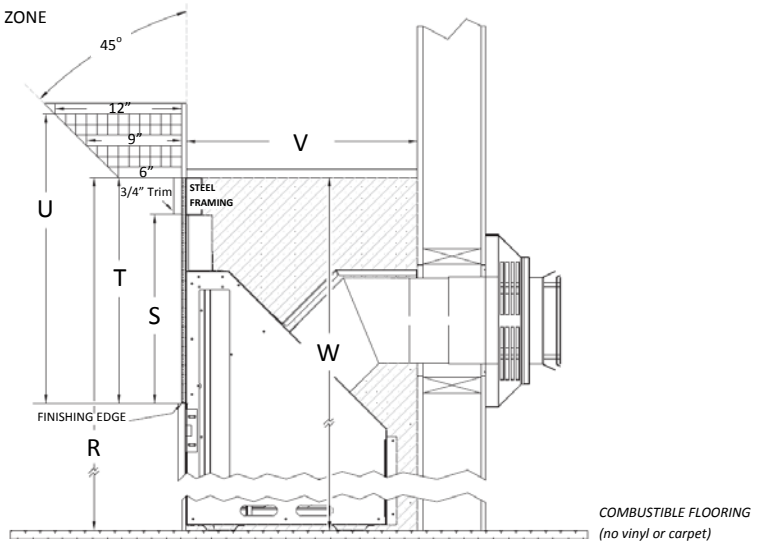

| Dimension | | | | | |
|-----------|----|--------|--------|----|----|
| R | S | T | U | V | W |
| 48 | 18 | 21-1/2 | 27-1/2 | 22 | 48 |

Horizontal Termination Framing

Rigid Pipe Venting

800 Series Flex-Vent Kit Venting

**Requirement when initially using 45° Elbow Vertically*

A Kozy Heat #800-WPT series wall pass thru is required with use of the flex-vent kit.

| Dimension | CLW-50 |
|-----------|--------|
| X | 22 |
| Y | 34-3/8 |
| Z | 44-3/4 |
| AA | 42 |

Horizontal 5" X 8" Venting Minimum Requirements

Consult venting chart in the manual for all options above minimum requirements

| Requirement | CLW-50 |
|------------------------|-----------|
| (NG/LP) Vertical Min | 45° Elbow |
| (NG/LP) Horizontal Min | 6 |
| (NG/LP) Horizontal Max | 24 |

H = Horizontal
V = Vertical

| Requirement* | CLW-50 |
|------------------------|-----------------------|
| (NG/LP) Vertical Min | 45° Elbow + 90° Elbow |
| (NG/LP) Horizontal Min | 6 |
| (NG/LP) Horizontal Max | 48 |

**Requirement when initially using 45° Elbow Vertically*

4" x 6-5/8" Decreaser Minimum Requirements

CO-LINEAR 3" X 3" FLEX PIPE VERTICAL VENTING

4" x 6-5/8" DECREASER


24" Vertical (5" x 8") MIN

| Requirement | CLW-50 |
|------------------------|-----------------------------|
| (NG/LP) Vertical Min | 45° Elbow + 24" + Decreaser |
| (NG/LP) Horizontal Min | 90° Elbow |
| (NG/LP) Horizontal Max | 48 |

CO-AXIAL TO CO-LINEAR ADAPTER

| Requirement | CLW-50 |
|------------------------|-----------------------|
| (NG/LP) Horizontal Min | 45° Elbow + Decreaser |
| (NG/LP) Vertical Min | 10 |
| (NG/LP) Vertical Max | 50 ft. |

Heat Shield Requirements



The horizontal vent heat shield must be installed when using a horizontal 45° elbow of the back of the appliance