
Framing Information: 68 Three Sided (TS) (Screen & Double Glass)



Framing Dimensions

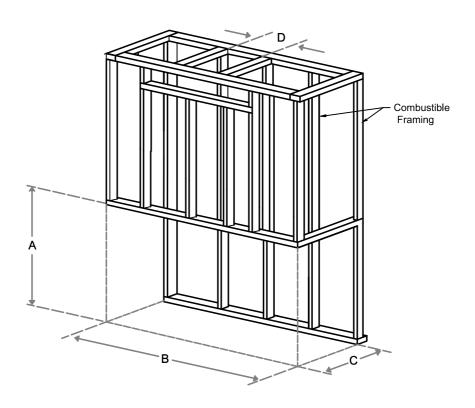

Model	А	В	С	D
68 TS	35 ¾"	73 ½ ₁₆ "	21 %"	Refer to Vent Manufacturer's Firestop Dimensions

Note: 1. Drawings are not to Scale

2. All dimensions in inches

3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE

SELF-SUPPORTED.

Framing Information: 68 Three Sided (TS) (Screen & Double Glass) Framing Details Nailing flanges fold up and connect to the framing. ALL FRAMING MUST BE SELF-SUPPORTED. The fireplace must not bear any weight. Heat Release Heat Release 5/8" Type X Drywall on Framing Exterior 5/8" Type X Drywa**ll** on Framing Exterior Combustible Framing 18% **Elevation View** Section View (required for double glass only) Add drywall nailer as needed. The valve can be moved 36" from the center Top View of the fireplace in any direction

Note: 1. Drawings are not to Scale

2. All dimensions in inches


3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.


Page 2 of 3

Framing Information: 68 Three Sided (TS) (Screen & Double Glass)




Fireplace Dimensions

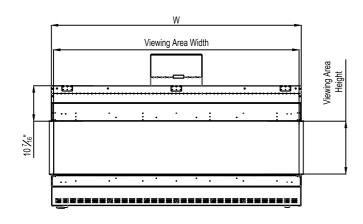




Front View

Side View





Model	(H) Height	(W) Width	(D) Depth	C1	C2	СЗ	Viewing Area	
Wiodei							Front	Side
68 TS	35 ¾"	73 ⁵ ⁄ ₁₆ "	21 %"	7 %"	36 ¹ ½ ₁₆ "	12 ½ ₆ "	73 ¾" W X 15 ¾" H	14 ¹³ / ₁₆ " W X 15 ³ / ₄ " H

Note: 1. Drawings are not to Scale

2. All dimensions in inches