
## Framing Information: 68H Three Sided (TS) (Screen & Double Glass)



### Framing Dimensions

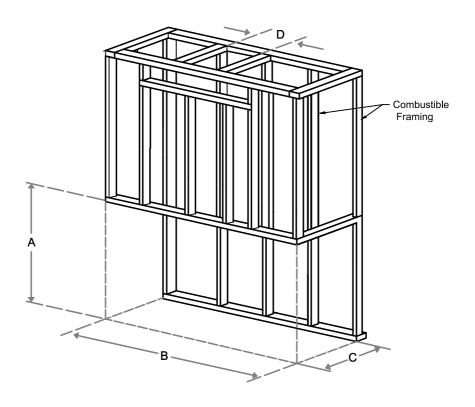

Model	Α	В	С	D
68H TS	41 <sup>1</sup> ½6"	73 ½ <sub>16</sub> "	21 %"	Refer to Vent Manufacturer's Firestop Dimensions

Note: 1. Drawings are not to Scale

2. All dimensions in inches

3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.

# Framing Information: 68H Three Sided (TS) (Screen & Double Glass) Framing Details Nailing flanges fold up and connect to the framing. ALL FRAMING MUST BE SELF-SUPPORTED. The fireplace must not bear any weight. Heat Release Heat Release 5/8" Type X Drywa**ll** on Framing Exterior 5/8" Type X Drywa**ll** on Framing Exterior Combustible Framing Air Intake Elevation View Section View (required for double glass only) Add drywall nailer as needed. The valve can be moved 36" from the center Top View of the fireplace in any direction

Note: 1. Drawings are not to Scale

2. All dimensions in inches


3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.


Page 2 of 3


### Framing Information: 68H Three Sided (TS) (Screen & Double Glass)




#### Fireplace Dimensions

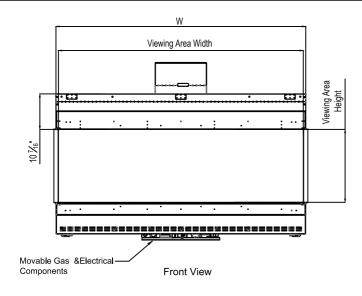

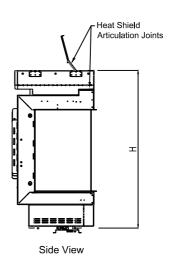

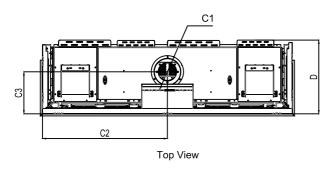

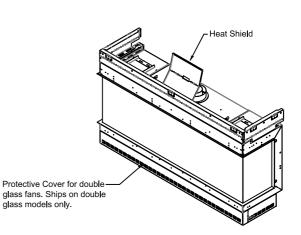

Model	(H)	(W)	(D)	C1	C2	C3	Viewing Area	
Wiodei	Height	Width	Depth	Ci	02	<u> </u>	Front	Side
68H TS	41 <sup>1</sup> / <sub>16</sub> "	73 ½6"	21 %"	7 1/8"	36 <sup>1</sup> ½ <sub>6</sub> "	12 ½"	73 ¾" W X 21 ½" H	14 <sup>13</sup> / <sub>16</sub> " W X 21 <sup>5</sup> / <sub>8</sub> " H

Note: 1. Drawings are not to Scale

2. All dimensions in inches