



DRL3613*I
DRL3613*I-2

DelRay
Linear

BTU LISTING

DRL3613NI / 16,000 BTU
DRL3613NI-2 / 21,000 BTU
DRL3613LI / 16,000 BTU
DRL3613LI-2 / 19,000 BTU

EFFICIENCY

DRL3613NI / 71% P.4, 1-15
DRL3613NI-2 / 63% P.4, 1-15
DRL3613LI / 71% P.4, 1-15
DRL3613LI-2 / 60% P.4, 1-15

Features

4"/7" venting system

1 1/4" framing depth

Flush face design

MONTIGO / DELRAY / DRL3613NI-2 / AMBER FIRESTONES

DELRAY LINEAR

Standard

Linear burner + Ice fireglass

Proflame 2 BASIC control module

Options

Propane conversion kit

Remote control

Fan kit

Reflective black glass panels

Invisimesh screen

**DELRAY LINEAR
FULL LOAD**

Standard

Linear burner + Ice fireglass

Full feature Proflame 2 remote control

Remote controlled fans



Reflective black glass panels

Halogen downlighting

Invisimesh screen

Options

Propane conversion kit

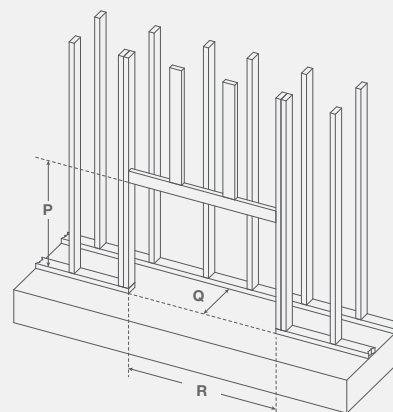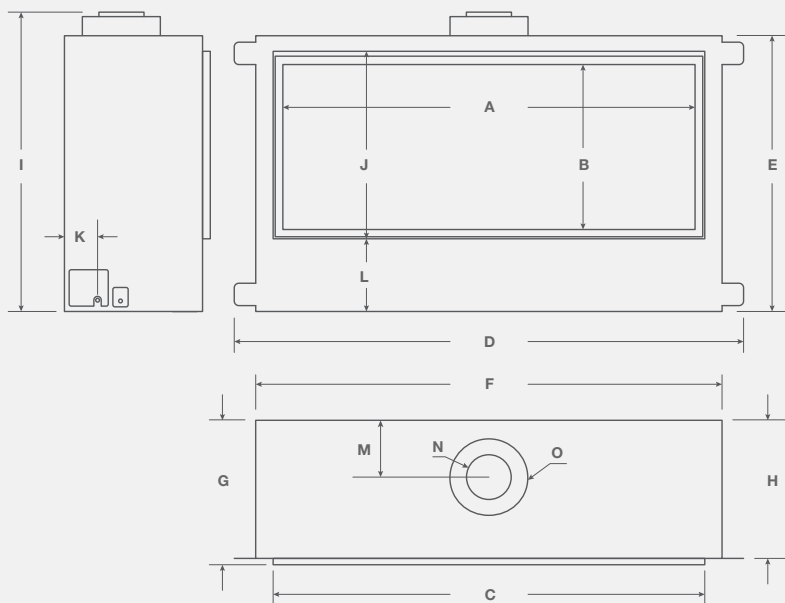

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
DRL36	36 1/2	14 1/16	38 3/8	45 1/4	24 1/4	41 3/8	12 3/4	12 5/16	26 3/4	16 5/8	3 1/8	6 5/16	5	4	7	34	14 1/4	43 3/8

SPECS

	Gas Supply Pressure NG (shown in w.c.)	Gas Supply Pressure LP (shown in w.c.)	Venting	Clearance Top	Clearance Sides	Clearance Back	Clearance Floor	Front viewing area	Front glass type	Standard media	Remote control	Fans	Downlighting	Invisimesh Screen	Standard	Available	Not Available
DRL3613*I-2	5.5	13	4"/7"	21	1	2	0	36 1/2 x 14 1/16	Borosil.	HW1157	o	o	o	o	o	+	-
DRL3613*I	5.5	13	4"/7"	21	1	2	0	36 1/2 x 14 1/16	Borosil.	HW1157	+	+	-	+	o	+	-

QUICK DIMENSION CHART

DRL3613				DRL4813			
ACTUAL	FRAMING	F.WIDTH	DEPTH	ACTUAL	FRAMING	F.WIDTH	DEPTH
45 1/4	43 3/8	57 1/4	55 3/8	57 1/4	55 3/8	57 1/4	55 3/8
41 3/8	43 3/8	53 1/16	53 1/16	53 1/16	53 1/16	53 1/16	53 1/16
26 3/4	33 1/16	26 3/4	33 1/16	26 3/4	33 1/16	26 3/4	33 1/16
12 3/4	14 1/4	12 3/4	14 1/4	12 3/4	14 1/4	12 3/4	14 1/4
36 1/2 x 14 1/16 VIEWING				48 1/2 x 14 1/16 VIEWING			