

Features

Meets requirements for efficiency rebates

14¼ framing depth

Mobile home compatible

Convertible to co-linear venting



DELRAY

LINEAR

SPECIFICATIONS AND FEATURES

DELRAY FULL LOAD LINEAR

DELRAY BASIC LINEAR

Standard

Concealed burner with ice fireglass

Multi-function remote control

Remote controlled fans

Invisimesh screen

Black reflective glass

Halogen downlighting

Battery backup

Options

Propane conversion kit

Adjustable trim kit

Speckled stones, driftwood, glass media

Heat management

Standard

Concealed burner with ice fireglass

Options

Remote control

Fans

Invisimesh screen

Black reflective glass

Propane conversion kit

Adjustable trim kit

Battery backup

Speckled stones, driftwood, glass media

Heat management

DRL3613 DRL4813

SINGLE SIDED
DIRECT VENT

QUICK DIMENSIONS

	DRL3613		DRL4813	
	UNIT	FRAM.	UNIT	FRAM.
F.WIDTH	45¼	43¾	57¼	55¾
B.WIDTH	41¾	43¾	53¾	55¾
HEIGHT	26¾	33⅞	26¾	33⅞
DEPTH	12¾	14¼	12¾	14¼
VIEWING	36½ × 14⅞		48½ × 14⅞	

BTU LISTING

DRL3613NI / 16,000
DRL4813NI / 21,000
DRL3613LI / 16,000
DRL4813LI / 19,000

DRL3613NI-2 / 16,000
DRL4813NI-2 / 21,000
DRL3613LI-2 / 16,000
DRL4813LI-2 / 19,000

EFFICIENCY

DRL3613NI / 71% P.4. 1-15
DRL4813NI / 63% P.4. 1-15
DRL3613LI / 71% P.4. 1-15
DRL4813LI / 60% P.4. 1-15

DRL3613NI-2 / 71% P.4. 1-15
DRL4813NI-2 / 63% P.4. 1-15
DRL3613LI-2 / 71% P.4. 1-15
DRL4813LI-2 / 60% P.4. 1-15






MONTIGO / DELRAY / LINEAR / DRL3613NI / ICE FIREGLASS

MONTIGO / DELRAY / LINEAR / DRL3613NI-2 / ICE FIREGLASS

DELRAY DIMENSIONS

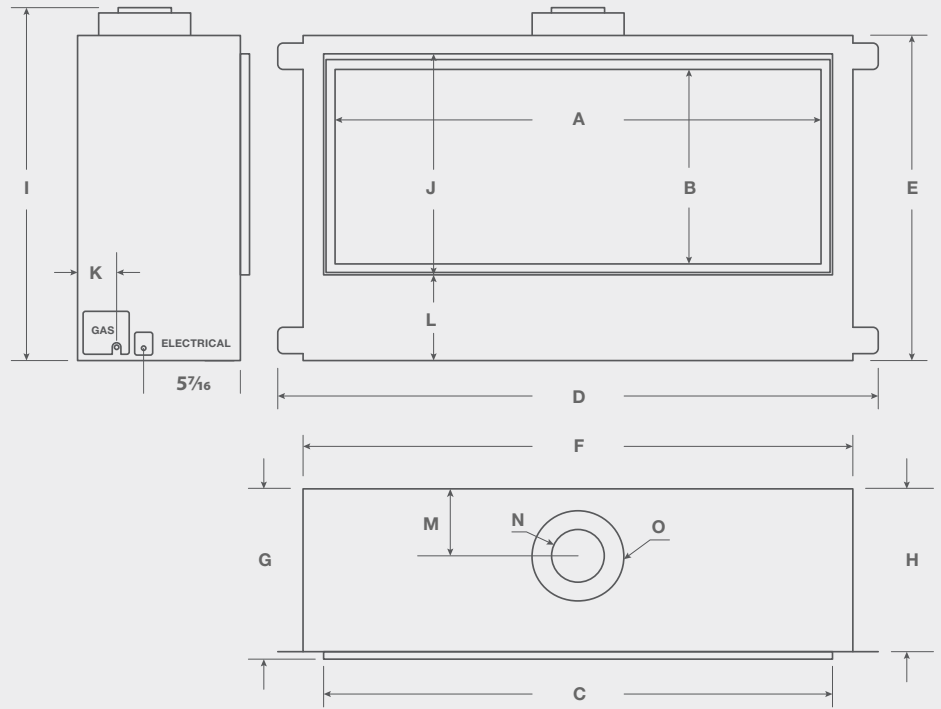

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
DRL36	36 1/2	14 1/16	38 3/8	45 1/4	24 1/4	41 3/8	12 3/4	12 5/16	26 3/4	16 5/8	3 3/8	6 9/16	5	4	7
DRL48	48 1/2	14 1/16	50 3/16	57 1/4	24 1/2	53 7/16	12 3/4	12 5/16	26 3/4	16 5/8	3 3/8	6 9/16	5	4	7



OPTIONS & FEATURES



REMOTE[†]
RX200**



WALL REMOTE
REC1493



BLACK GLASS[†]
RBGDR**



DOWNLIGHTING[†]



TRIM KIT
DRLT**_*

[†]Standard for full load units

Unit Specifications

Icon Legend

AVAILABLE

+

NOT AVAILABLE

-

DEDICATED

◊

STANDARD


◦

	BTU Natural Gas	BTU Liquid Propane	Venting	Clearance Top - Top vent	Clearance Sides	Clearance Back	Clearance Floor	Front viewing area	Front glass type	Standard media	Invisimesh screen	Powervent	Remote control	Fans	Uplighting	Downlighting
DRL3613*I-2	16,000	16,000	4"/7"	21	1	2	0	36½ x 14⅛	Tempered	HW1157	◦	+	◦	◦	-	◦
DRL3613*I	16,000	16,000	4"/7"	21	1	2	0	36½ x 14⅛	Tempered	HW1157	+	+	+	-	-	-
DRL4813*I-2	21,000	19,000	4"/7"	21	1	2	0	48½ x 14⅛	Tempered	HW1157	◦	+	◦	◦	-	◦
DRL4813*I	21,000	19,000	4"/7"	21	1	2	0	48½ x 14⅛	Tempered	HW1157	+	+	+	-	-	-

DELRAY LINEAR FRAMING

	A	B	C	D	E	F
DRL3613	34	14¼	43¾	47½	67⅞	½
DRL4813	34	14¼	55¾	56⅞	79¼	½

Header must be on edge to meet clearance to venting

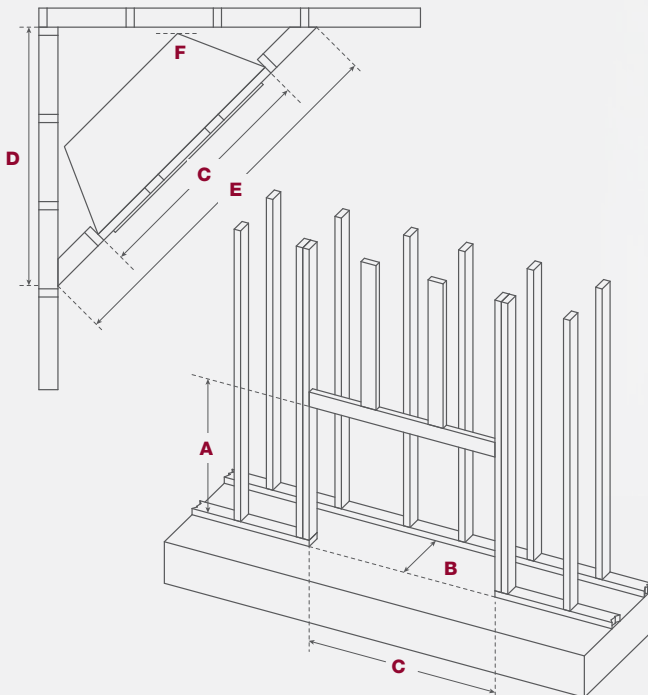

DELRAY LINEAR COMBUSTIBLE FACING

Minimum 6" chase
(When venting ports open or
using cool wall kit)

Combustible surround flush to
opening (included cement board
optional when venting ports open
or using cool wall kit)

Open venting ports
(or heat diversion kit)

IMPORTANT

Leaving the venting ports open requires a
vented chase.
(see below for sizes)

DRL36

Minimum 70" inch opening

DRL48

Minimum 100" inch opening