



Revillusion®
36" Built-in Electric Firebox

RBF36WC
Weathered Concrete

The Future of
Fireplaces is Clear.™



Building on the innovative Revillusion® ThruView™ full-depth design, the new Weathered Concrete Series strikes a more contemporary chord. The poured concrete features subtle detail and a neutral palette that provides a dramatic contrast for the lifelike flames. This playful use of an industrial material is a unique way to give any space some stylish, industrial flair.

Revillusion®
by Dimplex

Revillusion® 36" Built-in Electric Firebox

RBF36WC Weathered Concrete



Capacitive touch built-in controls.

RBF36WC
Weathered concrete
firebox interior



Mood-maker Remote
Customize the light color and intensity for a fireplace that reflects your personality.

120 V | 1,300 W | 4,400 BTU
208 V | 1,975 W | 6,745 BTU
240 V | 2,575 W | 8,794 BTU

Also available in Herringbone Brick - RBF36



Features

Revillusion® Flame Technology
Flames are larger, brighter and more random, appearing from within the logs.

Mirage™ Flame Panel
Partially frosted acrylic panel is clearly better than a mirror, showing only dazzling flames and no reflections.

ThruView™ Full-depth Design
See clear through the flames to the back of the firebox for a more authentic experience.

Mood Lighting
Customize the firebox glow with a choice of warm hues, plus midnight mode.

Color Enhancement
Adjust the flame base color to red or blue.

Realogs® Plus
A full grate of life-size hardwood-cast logs, tiered for greater depth.

Full Surround Firebox
More authentic day or night; 270-degree surround with natural soot markings.

Brightness and Flicker
Adjust light level to suit the room and choose flicker effect for enhanced firelight.

Ambient Light Sensor
Automatically adjusts firebox light to suit the room day to night.

Quick and Easy Installation
Simply frame, wire and finish – no venting, gas lines or safety screens.

Primary Heat
Option to use 240 volt supply for up to 8,800 BTU - use as part of primary heating plan; heater also operates without flame and can be deactivated.

All-season Flames
Enjoy the unique charm of a fireplace 365 days a year using the flames without the heat.

Direct-wire
Designed to be direct-wired to a 120, 208 or 240 volt circuit for a seamless look (optional plug kit available).

Low Carbon Footprint
The most sustainable fireplace option; no emissions and 100% efficient.

Model #	Description	Lbs / Kg	UPC	Wty¹	Carton Dimensions (WxHxD)		Cube	
					Inches	cm	ft³	m³
RBF36WC	36" Built-in Electric Firebox - Weathered concrete interior	74.7 / 34.0	781052 129856	2 yrs.	41-1/4 x 15-1/4 x 31-7/8	104.6 x 38.7 x 81.0	11.6	0.3
RBF36	36" Built-in Electric Firebox - Herringbone brick interior	74.9 / 34.0	781052 104723	2 yrs.	41-1/4 x 15-1/4 x 31-7/8	104.6 x 38.7 x 81.0	11.6	0.3
RBFL42BR	Birch Log Set	15 / 6.8	781052 129993	2 yr.	29-7/8 x 17-1/2 x 15	75.9 x 44.1 x 38.1	4.52	0.13
RBFL42FC	Fresh Cut Log Set	15 / 6.8	781052 129986	2 yr.	29-7/8 x 17-1/2 x 15	75.9 x 44.1 x 38.1	4.52	0.13
RBFLPLUG	Plug Kit	0.6 / 0.3	781052 107656	1 yr.	7 x 3 x 4	17.8 x 7.6 x 10.2	0.05	0.00
RBFLGLASS36	Single Glass Pane	25.1 / 11.4	781052 108011	1 yr.	42-1/8 x 29-1/4 x 4-1/4	106.8 x 74.2 x 10.6	3.0	0.08
RBFDOR36	36" Glass Door	32.7 / 14.7	781052 108059	1 yr.	41-7/8 x 30-1/8 x 4-5/8	106.3 x 76.4 x 11.6	3.3	0.09

Specifications, finishes and dimensions are subject to change. ¹Limited warranty. ©2019 Glen Dimplex Americas.

SE-455-R00-073019

Revillusion® 36" Built-in Electric Firebox

RBF36WC Weathered Concrete

Accessories



RBFGLOSS36 - 36" Tempered Front Glass
Dimensions:
35-1/8" W x 22-1/8" H x 3/8" D
(89.1 cm x 56.1 cm x 1.1 cm)



RBFDOOR36 - 36" Functional Doors with Tempered Glass
Dimensions:
39-3/4" W x 27-1/4" H x 1-1/4" D
(101.1 cm x 69.4 cm x 3.7 cm)



RBFPLUG





RBFL42BR - Birch Log Set
Dimensions:
26-1/2" W x 11-1/8" H x 11" D
(67.2 cm x 28.1 cm x 27.9 cm)



RBFL42FC - Fresh Cut Log Set
Dimensions:
26-1/2" W x 11-1/8" H x 11" D
(67.2 cm x 28.1 cm x 27.9 cm)

Framing Dimensions:

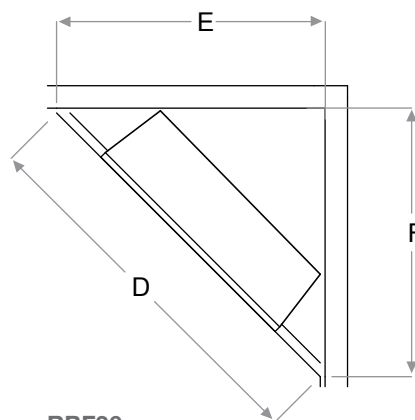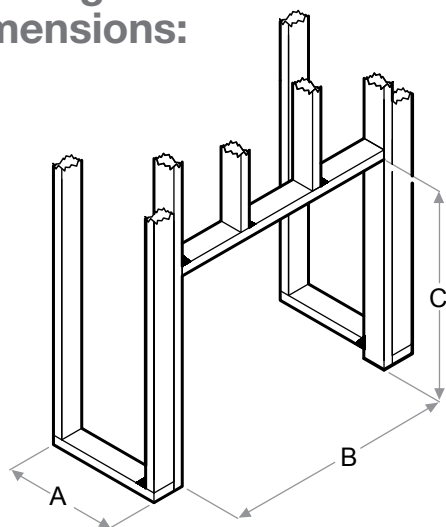

NOTE: The materials used for the finished surround must be cut to precise dimensions as the 1/2" (1.3 cm) self trimming flange is only to create a finished appearance.

RBF36

A	B	C	D	E	F
12-1/2" (31.8 cm)	36-5/8" (93.0 cm)	26-1/4" (66.5 cm)	60" (152.4 cm)	42-1/2" (108.0 cm)	42-1/2" (108.0 cm)