


2" Min. Height Heat Release Opening [Front & Sides]
 [U70T = 210 sq. in. Min. open area]
 [U50T = 170 sq. in. Min. Open area]

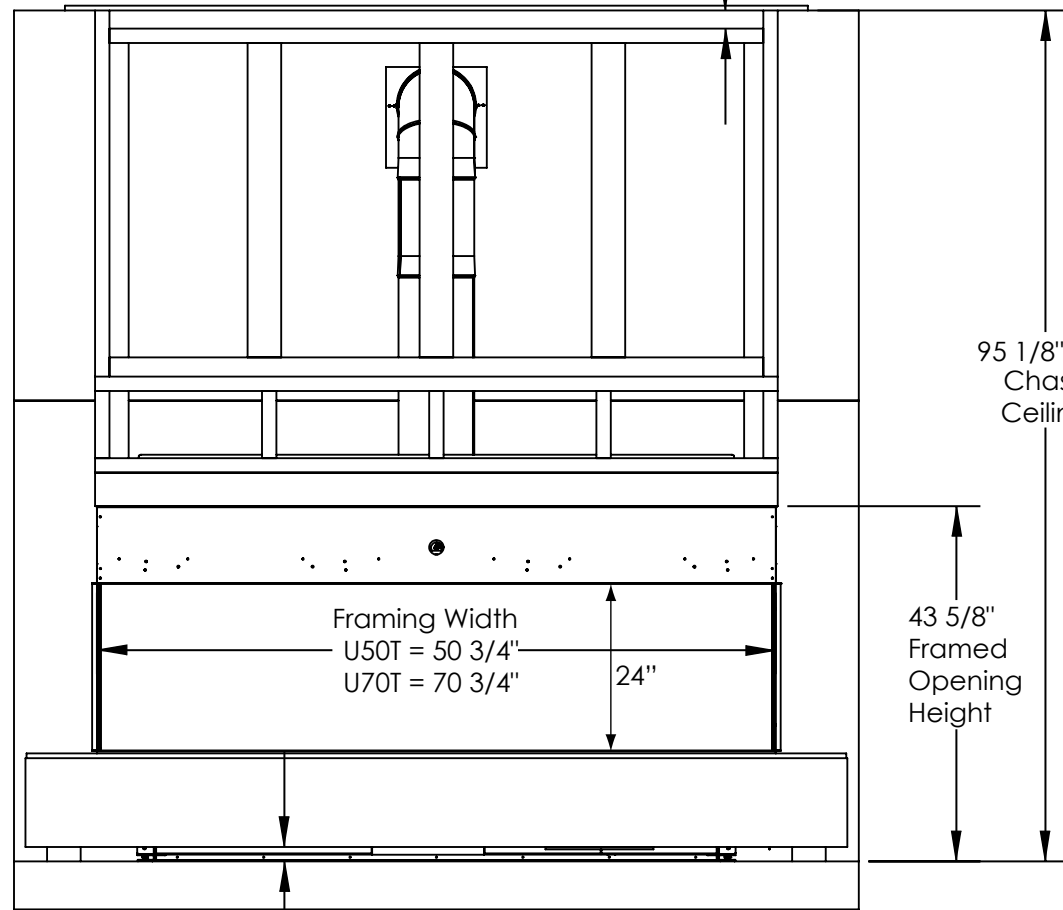

Sidewall Clearance
 In Front of
 Fireplace = 1 1/2"

1 1/2" Min. Intake Opening Height [Front & Sides]
 [U70 = 165 sq. in. Min. open area]
 [U50 = 135 sq. in. Min. open area]

95 1/8" Min.
 Chase
 Ceiling

43 5/8"
 Framed
 Opening
 Height

Framing Width
 U50T = 50 3/4"
 U70T = 70 3/4"
 24"

Termination Sidewall
 Clearance = 12"

4 3/4" Min.
 Ceiling to Elbow
 Clearance

24" Min.
 Overhang
 Clearance

Min Vent [5x8] =
 3' up + 90° Elbow
 87 1/8" Thimble

5" Max. Framed
 Recess Depth

Termination
 Guard
 Required

1 1/2"
 Termination
 Standoff

20" Min.
 Framed Recess
 Height

21" Min.
 Framing
 Depth

15 5/8"

12" Max. Depth
 Overhang / Mantle @ 0"

12" Max. Finished
 Plinthe Depth

Urbana Luxury Fireplaces

Part Description

U50T & U70T Framing & Clearances

SCALE - NOT TO SCALE

REV

DRAWN BY GP

DATE 01/22/21

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS IN INCHES

GENERAL TOLERANCE: +/- 1/32"

SHEET 1 OF 1