

KOZY HEAT

FIREPLACES



NÔRDIK SERIES



Nordik 34i with herringbone refractory and a prairie screen front with shroud

NÔRDIK SERIES

Fronts



Rectangle Screen Front
With Rustic Brick refractory
Available in Black, Antique Copper, Brushed Nickel



Antique Copper Rectangle Screen Front
With Ledgestone refractory
Available in Black, Antique Copper, Brushed Nickel



Prairie Screen Front
with Chicago Brick refractory
Available in Black



Arched Prairie Full Door
with Herringbone Refractory
Available in Black



Arched Mission Screen Front
in Vintage Bronze with Black Glass Panels
Available in Vintage Bronze

Refractory/Panel Options



Black Glass



Herringbone



Rustic Brick



Ledgestone




Chicago Brick

NÔRDIK SERIES

Specifications

Nordik

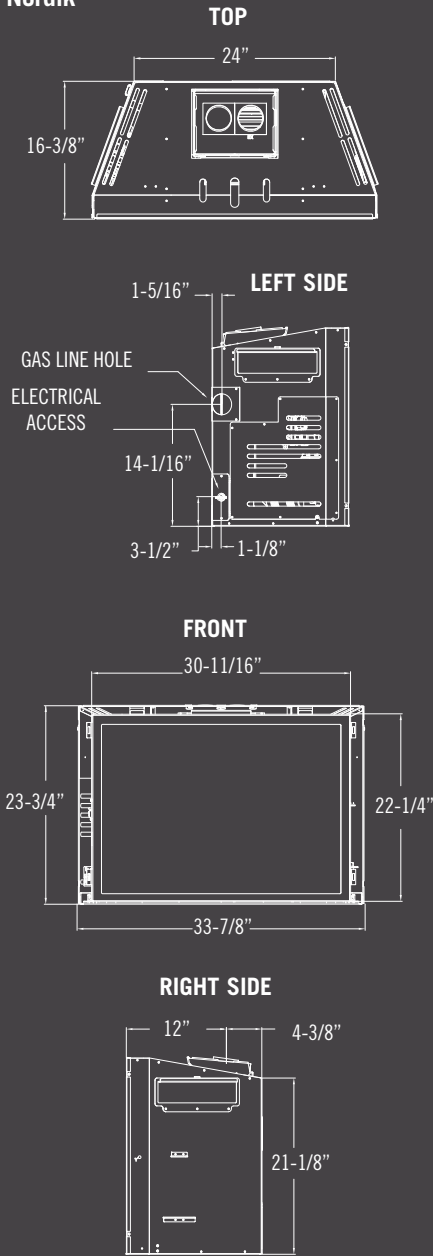

Shroud Dimensions

*Shroud is Required for Installation

- 27" x 40"
- 30" x 44"
- 33" x 46"

*Custom sizes available when applicable

Model	Nordik 34i
Height	23-3/4"
Width	33-7/8"
Back Width	24"
Depth	16-3/8"
Weight	145 lbs
Viewing Area	30-11/16" x 22-1/4"
BTU NG High / Low	40,000 / 20,000
BTU LP High / Low	40,000 / 21,000
ENERGUIDE P.4 NG / LP	69.57% / 69.53%
Steady State NG / LP	70.95% / 71.08%
AFUE % NG / LP	70.72% / 70.80%
Valve System	Dexen IPI
Fan Kit	Included
Top Light Kit	Included
Ember Bed Light Kit	Included
Screen Front	Required

Features, Options & Specifications are subject to change.

Each unit factory tested

Certified to ANSI Z21.88 Vented Gas Heaters

Existing Fireplace Opening must be at least:

- Height: 23-3/4"
- Front Width: 34-1/8"
- Depth: 16-3/8"
- Back Width: 24-1/8"

Existing Chimney:

Inside Diameter:

- Factory built solid fuel chimney: 7" min
- Masonry Chimney: 6" x 8" min
- Minimum Chimney Height: 10'
- Maximum Chimney Height: 40'

Control Option



Fireplace brochures are for advertising purposes only. Refer to the specific fireplace manual for installation.

Clearances

Model	Nordik 34i
Adjacent sidewall minimum clearance	4"
Minimum clearance from the fireplace enclosure floor to ceiling	55"
From the insert to the combustible floor in front	See Requirements in the manual
Non-Combustible Mantel 9" deep from the top of insert	6"
Combustible 3/4" trim deep from the top of insert	6-1/2"
Combustible Mantel 9" deep from the top of insert	10"

Refer to the installation manuals for complete installation & venting requirements. See additional mantel clearance configurations in the installation manual.

Burn Video



Nordik

Vent System Approval & Requirements

- Kozy Heat #816 & #816- CAP
- BDM™
- American Metal™ Products (Amerivent)
- Metal Fab™
- Olympia™
- ICC™
- Simpson Dura-Vent™

Remote control features:

- Thermostat function
- Flame height modulation
- Fan speed modulation
- Light kit modulation
Top Light Kit On/Off
- IPI to continuous pilot

In order to continually provide the highest quality product available, features/options, specifications, & dimensions are subject to change. Flame appearance and characteristics may be affected by altitude, fuel type, venting configuration, and other factors. Refer to the unit installation manual for complete installation instructions. Installation must conform with local building codes. **In some regions it may be possible that this appliance qualifies for an energy rebate. See your local dealer for details regarding promotions and qualifications.**

Manufactured by Hussong Mfg. Co., Inc.
204 Industrial Park Road, Lakefield, MN 56150
Phone 1-800-253-4904 www.kozyheat.com

8-22



Product Line:



For complete information on the Kozy Heat product line, please contact us at:

FOR CALIFORNIA RESIDENTS ONLY

⚠ California Proposition 65 Warning

WARNING: This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel combustion, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov.