




NÔRDIK SERIES

GAS 41DV & 36DV

Nordik 36DV with black glass panels, a full rectangle screen front and a Komfort Zone Kit

KOZY  HEAT
FIREPLACES



— Nordik Series Gas Fireplaces from Kozy Heat —

THE **EVO**LUTION OF FIRE



Kozy Heat's **EVO** Elevated Burner creates a stunningly realistic fire not yet seen in the gas fireplace industry.



Nordik 41DV with black brick refractory,
and an arched mission screen front



Nordik 36DV with black glass panel refractory, and a prairie vented screen front

NÔRDIK SERIES

Refractory/Panel Options



Black Glass



Ledgestone



Herringbone



Chicago Brick



Black Brick

NÔRDIK SERIES

Nordik 41DV & 36DV Fronts

Nordik 41DV measurements for all fronts are 41-3/8" x 34-3/4"

Nordik 36DV measurements for all fronts are 36-3/8" x 32-1/4"



Mission Screen Front in Vintage Bronze



Arched Mission Screen Front in Vintage Bronze



Prairie Screen Vented Front in Black



Rectangle Screen Vented Front in Black



Prairie Screen Front in Black

Approved for the Komfort Zone Kit Installations Only



Full Rectangle Screen Front in Black

*Comes in Black, Brushed Stainless, or Antique Copper
Approved for the Komfort Zone Kit Installations Only*

NÔRDIK SERIES

Specifications

Model	Nordik 41DV	Nordik 36DV
Height	34-1/2"	32"
Width	40-3/4"	35-3/4"
Back Width	27-1/4"	22-1/4"
Depth	20"	19-1/2"
Weight	235 lbs	215 lbs
Viewing Area	37-5/8" x 29-3/8"	32-5/8" x 26-7/8"
BTU NG High / Low	40,000 / 22,000	35,000 / 18,000
BTU LP High / Low	40,000 / 21,000	35,000 / 18,000
ENERGUIDE P.4 NG / LP	70.84% / 70.94%	70.41% / 71.57%
Steady State NG / LP	72.37% / 71.59%	71.12% / 74.02%
AFUE % NG / LP	72.00% / 72.27%	71.71% / 72.99%
Valve System	IPI	IPI
Fan Kit	Included	Included
Top Light Kit	Included	Included
Ember Bed Light Kit	Included	Included
Screen Front	Required	Required
Media Options	Traditional Log & Birch	Traditional Log & Birch
Horizontal Power Vent	Optional	Optional

Features, Options & Specifications are subject to change.

Each unit factory tested

Certified to ANSI Z21.88 Vented Gas Heaters

Clearances

Model	Nordik 41DV	Nordik 36DV
Minimum height of the fireplace enclosure	76"	72"
Base of the fireplace to ceiling	76"	72"
Fireplace top to ceiling	41-1/2"	40"
Fireplace from stand off brackets	0"	0"
From fireplace corners	1/2"	1/2"
From fireplace front	36"	36"
Fireplace sides to adjacent sidewall	3/4"	3/4"
Fireplace top to 3/4" mantel trim	6-1/2"	8"
Mantel 6" deep from fireplace top	10"	11-1/2"

Refer to the installation manuals for complete installation & venting requirements.
See additional mantel clearance configurations in the installation manual.

Heat Management Options

Model	Nordik 41DV	Nordik 36DV
Komfort Zone Kit	Optional	Optional

Vent System Approval & Requirements

- BDM™
- American Metal™ Products (Amerivent)
- Metal Fab™
- Olympia™
- ICC™
- Simpson Dura-Vent™
- Selkirk

Elbows: For each additional 90° elbow used after the first elbow, 3' must be subtracted from the maximum venting allowed. For each additional 45° elbow used after the first elbow, 1½' must be subtracted from the maximum venting allowed.

Note: (2) 45° elbows = (1) 90° elbow.

Nordik 36DV

Approved 4 x 6 venting standard

Approved for Class A/Masonry Chimney conversion kits

Approved for coaxial to colinear 3 x 3 venting

Nordik 41DV

Approved 5 x 8 venting standard

Reduces down 4 x 6-5/8

Approved for Class A/Masonry Chimney conversion

Horizontal Terminations

36DV

Minimum: 12" vertical vent pipe + 90° horizontal elbow + termination cap

Maximum: 25' maximum vertical + 90° horizontal elbow + 25' maximum horizontal + termination cap.

41DV

Minimum: 12" vertical vent pipe + 6" vertical vent pipe + 90° horizontal elbow + termination cap

Maximum: 25' vertical pipe + 90° elbow + 25' maximum horizontal + termination cap

Vertical Terminations

Minimum: 3' + vent cap

Maximum: 50' + vent cap

Burn Videos



Nordik 41DV




Nordik 36DV

NÔRDIK SERIES


Specifications

Fireplace brochures are for advertising purposes only.
Refer to the specific fireplace manual for installation.

Nordik 41DV

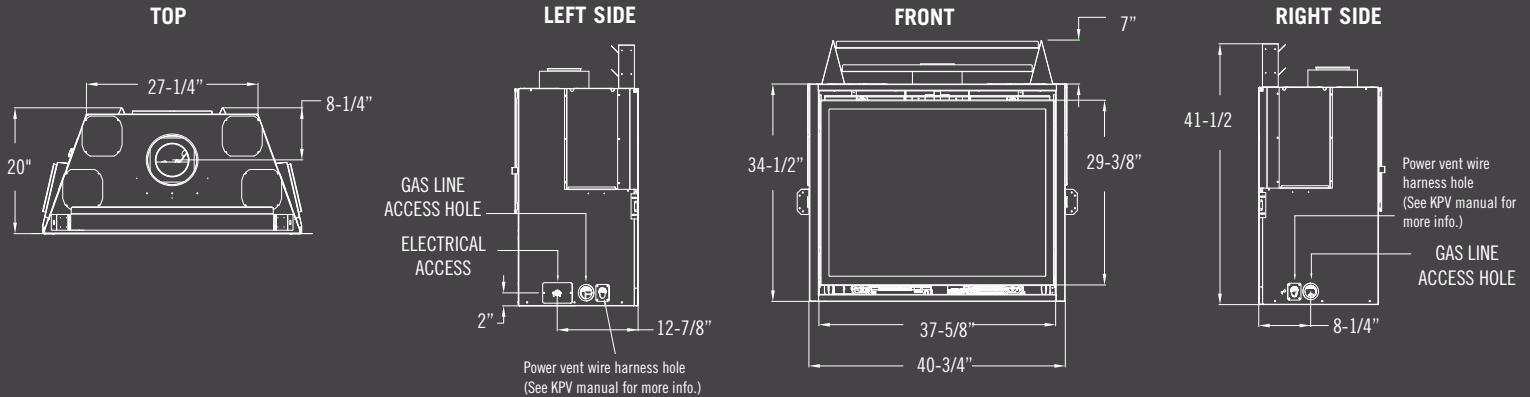

Nordik 36DV

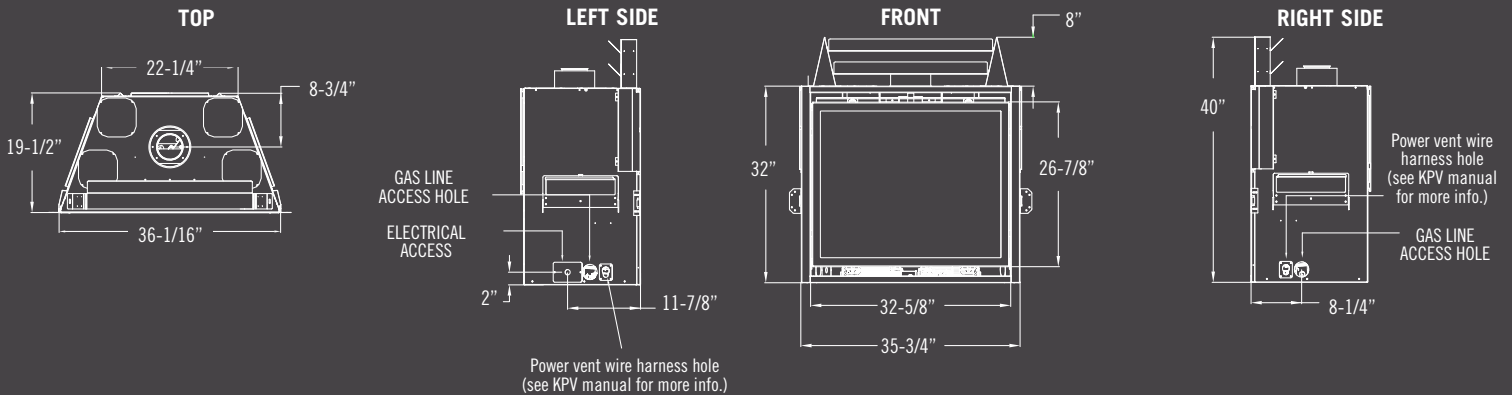






Control Option



KOMFORT KONTROL

The Komfort Kontrol remote gives you the ability to bring comfort and green technology all together into your home. With the Komfort Kontrol remote, all you have to do is decide a comfortable set point temperature on your remote and when the room temperature gets closer to the point you desire, the Komfort Kontrol remote will turn the flames down accordingly! And with our zone heating, you can save energy and enjoy time in the room you use the most by just turning down the central heat, setting your Komfort Kontrol remote, and enjoy your time around the fireplace with friends, family, or just a good book! That way you'll get to have heat where and when you need it while saving energy and money with just a click of the Komfort Kontrol remote!

Remote control features:

-  Thermostat function
-  Flame height modulation
-  Fan speed modulation
-  Top Light Kit: Modulation
Ember Bed: On/Off
-  IPI to continuous pilot

KOZY HEAT

FIREPLACES

In order to continually provide the highest quality product available, features/options, specifications, & dimensions are subject to change. Flame appearance and characteristics may be affected by altitude, fuel type, venting configuration, and other factors. Refer to the unit installation manual for complete installation instructions. Installation must conform with local building codes. **In some regions it may be possible that this appliance qualifies for an energy rebate. See your local dealer for details regarding promotions and qualifications.**

Manufactured by Hussong Mfg. Co., Inc.
204 Industrial Park Road, Lakefield, MN 56150
Phone 1-800-253-4904 www.kozyheat.com 9-23



Product Line:



For complete information on the Kozy Heat product line, please contact us at:

FOR CALIFORNIA RESIDENTS ONLY

⚠ California Proposition 65 Warning

WARNING: This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel combustion, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov.