





REVERIE GAS FIRE TABLE


with Supercast top & 20" Round Crystal Fire® Plus Burner

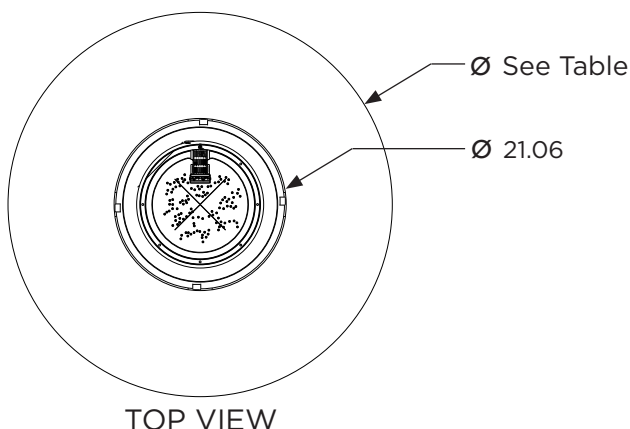

TOP VIEW

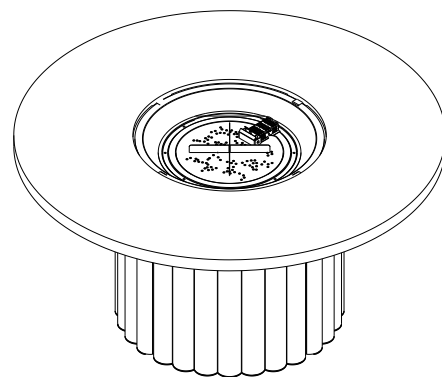

ISOMETRIC VIEW

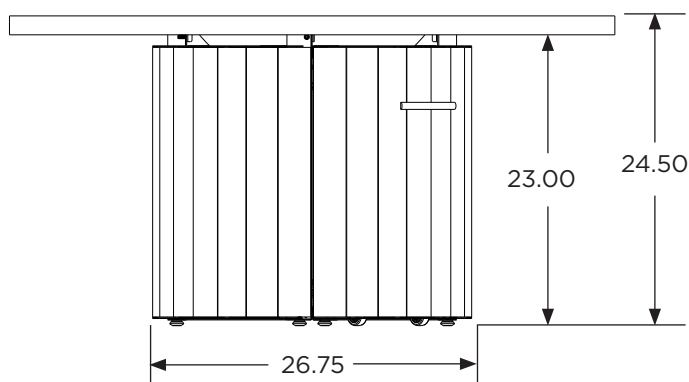

FRONT VIEW

ITEM CODE	TOP DIAMETER (in.)	WEIGHT (lbs.)
REVBBL-48-K REVBWH-48-K REVRBL-48-K REVRCH-48-K REVRWH-48-K	48	216

ITEM CODE	TOP DIAMETER (in.)	WEIGHT (lbs.)
REVSBL-42-K REVSBR-42-K REVSCH-42-K REVSWH-42-K	41 - 3/8	153
REVBBL-42-K REVBWH-42-K REVRBL-42-K REVRCH-42-K REVRWH-42-K	42	169

Technical Specifications: 55,000 BTU/hr

- CLEARANCE TO COMBUSTIBLES**
 - 72" from top of burner to any overhead combustible material. 24" from edge of burner trim to any combustible side wall materials. 4" from bottom of burner to combustible floor materials
- GAS SUPPLY**
 - Natural Gas - Operating Supply Pressure: Min 6" WC; Max 10.5"; IDEAL 7" WC
 - Liquid Propane - Operating Supply Pressure: Min 8" WC; Max 14" WC; IDEAL 11" WC
- CONTROLS**
 - Controls located on appliance structure.
 - Thermocouple safety valve (VCSV-S) and sparker
- BURNER LISTING**
 - Standard - ANSI Z21.97-2017/CSA 2.41-2017 Outdoor Decorative Gas Appliances
 - Testing Agency - Underwriters Laboratories (UL LLC)

Included Items: base, top (with mounting hardware), burner (CFP20), matching burner cover, clear glass gems (10 lbs.), natural gas conversion Kit

Optional Accessories: Glass Wind Guard (GG-20R), Protective Cover (CVR42 or CVR50), Other Burner Media Options