



Unit Illustrated: Model MQVLBG60NE2 Bay Peninsula Direct Vent Fireplace (Natural Gas), MQG5C Glass Media (Bronze x3), MQVL60RGB Reflective Glass Liner (Back). (Chase must be vented below and above appliance – consult manual for instructions).

ENCLAVE

ZERO CLEARANCE DIRECT VENT
BAY PENINSULA GAS FIREPLACE

 marquis
COLLECTION

CREATING A NEW DIMENSION

Its wraparound view captivates from every angle. Luring you in with its three-dimensional sightlines, the **ENCLAVE** from Marquis creates a sleek and cleverly designed gathering point for the heart of your home.

Amazingly versatile, this beguiling fireplace adapts to suit any room with options for a Single Side, Corner or a Bay Peninsula. It transforms completely with your choice of fireplace liner and accessories that range from driftwood logs and contemporary rocks to cannonballs and glass.

With the **ENCLAVE'S** innovative vented chase technology you may now cover the fireplace with combustible materials up to the glass door opening.

Follow the instructions in the manual for venting the chase (opening above and below the appliance is required).

Visit marquisfireplaces.net to see the latest evolution in fireplaces.

ENCLAVE FEATURES

STANDARD

- Accent Lighting:
LED Lighting (non-dimmable)
– Enclave 48/60/72 only; and
Halogen Lighting – Enclave 34 only
- Proflame II Models include Remote Control with the following features: flame adjustment, thermostat, smart thermostat (WIFI Compatibility) and accent lighting control
- Zero Clearances to TVs and Artwork
- Invisible Glass Safety Barrier

BENEFITS OF OUR VENTED CHASE TECHNOLOGY

- No fans required to vent the chase, will work during power failures (batteries required)
- Allows for all wood framing
- Combustible materials may be used right up to the glass door opening
- Seamless glass, removes the need for steel safety screen barrier
- Allows for reduced mantel clearances
- Ultra-low TV clearances



* Amazon Alexa, Google Home, Smartphone

OPTIONAL

Surrounds:

Black or Stainless; Single-Sided Models only

Liners:

Reflective Glass, Fluted Brick, Stacked Brick (Enclave 48/60/72 only), or Traditional Brick (Enclave 34 only)

Media Options (Required):

Glass Media (Glacier Ice, Cobalt Blue, Black, Bronze, White)

Additional Media (Optional):

Cannonballs, Decorative Stones, Contemporary Rocks (natural and multi-colored), Ember Chunks

Log Sets:

Oak, Birch, and Driftwood Sets

Enclosure Grills:

Front or Sides – Unfinished

Corner Kit:


Available for Bay Peninsula Unit

Side Extension Panels:

Black; Single-Sided Models only

Heat Distribution System:

Plenum (Enclave 48 only)

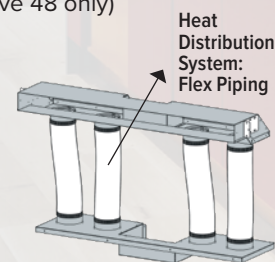

Heat Distribution System: Flex Piping



Unit Illustrated: Model MQVLBG48NE2 Bay Peninsula Direct Vent Fireplace (Natural Gas), VL48EG Grill Kit for Enclosure, MQBRW Birch Log Set, MQG5C Glass Media (Bronze x2), MQSTONE10 Decorative Stones, MQVL48RGB Reflective Glass Liner (Back). (Chase must be vented below and above appliance – consult manual for instructions).

ENCLAVE 34

MODEL	MQZCVRB34NE2	MQZCVRB34LPE2
Type	BAY PENINSULA	BAY PENINSULA
Fuel	Natural	Propane
Gas Control	IPI PF2	IPI PF2
Input Max.	25,000 BTU	24,000 BTU
Input Min.	17,500 BTU	19,000 BTU
Venting*	5"/8"	5/8"
Glass Size	33 1/16" W X 22" H	33 1/16" W X 22" H
Glass Type	Ceramic	Ceramic
FE (P.4.1-15)	52.94%	51.96%

Ventilation Required:

THE FIREPLACE CHASE MUST BE VENTED ABOVE THE APPLIANCE**
THIS UNIT CAN BE CONVERTED TO A CORNER INSTALLATION

**This appliance is approved for use with 5"/8" Kingsman Flex, M&G-DuraVent Direct Vent system (Model DV-GS Series) and Snorkel, BDM Pro Form Direct Vent, Ameri-Vent Direct Vent Pipe System, ICC Excel Direct, Metal Fab Sure-Seal DV and Selkirk Direct Temp. When using ICC Excel Direct a one-foot section of 5"/8" MG DuraVent must be used as a starter collar at the flue of the appliance.*

***Consult Installation Manual for requirements and further clarification.*

Unit Illustrated: Model MQZCVBG34NE2 Direct Vent Fireplace (Natural Gas), VL34EG Grill Kit for Enclosure, MQ42D Driftwood Log Set, MQZCVBG34RGB Reflective Glass Liner (Back).
 (Chase must be vented above appliance – consult manual for instructions).



***NOTE:** the fireplace chase must be vented above the appliance.



Unit Illustrated: Model MQZCVBG34NE2 Bay Peninsula Direct Vent Fireplace (Natural Gas), MLOGF34BW Birch Log Set, and MQZCVBG34RGB Reflective Glass Liner (Back).
 (Chase must be vented above appliance – consult manual for instructions).

ENCLAVE 48



MQVLBG48NE2 Bay Peninsula Direct Vent Fireplace (Natural Gas), VLBGCK Corner Kit, MQG5C Glass Media (Bronze x2), MQRBD3 Driftwood Log Set.



MQVLBG48NE2 Direct Vent Fireplace (Natural Gas), VLBGCK Corner Kit, MQG5C Glass Media (Bronze x2), MQ46D Driftwood Log Set, MQVL48RGB Reflective Glass Liner (Back).



MQVLBG48NE2 Direct Vent Fireplace (Natural Gas), MQG5C Glass Media (Bronze x2), MQVL48RLFB2 Fluted Brick Liner (Back).

**This appliance is approved for use with 5"8" Kingsman Flex, M&G-Duravent Direct Vent system (Model DV-GS Series) and Snorkel, BDM Pro Form Direct Vent, Ameri-Vent Direct Vent Pipe System, ICC Excel Direct, Metal Fab Sure-Seal DV and Selkirk Direct Temp. When using ICC Excel Direct a one-foot section of 5"8" MG Duravent must be used as a starter collar at the flue of the appliance.*

***Consult Installation Manual for requirements and further clarification.*

Unit Illustrated: Model MQVLBG48NE2 Bay Peninsula Direct Vent Fireplace (Natural Gas), VLBGCK Corner Kit, MQG5C Glass Media (Bronze x2), MQSTONE Decorative Stones, MQVL48RGB Reflective Glass Liner (Back) and MQVL48RGE Reflective Glass Liner (Ends). (Chase must be vented below and above appliance – consult manual for instructions).


MODEL	MQVLBG48NE2	MQVLBG48LPE2	MQVL48NE2	MQVL48LPE2
Type	BAY PENINSULA	BAY PENINSULA	SINGLE-SIDED	SINGE-SIDED
Fuel	Natural Gas	Propane	Natural Gas	Propane
Gas Control	IPI PF2	IPI PF2	IPI PF2	IPI PF2
Input Max.	35,000 BTU	35,000 BTU	35,000 BTU	35,000 BTU
Input Min.	25,000 BTU	27,000 BTU	25,000 BTU	27,000 BTU
Venting*	5"8"	5"8"	5"8"	5"8"
Glass Size	49 1/16" W x 17 7/8" H	49 1/16" W x 17 7/8" H	49 1/16" W x 17 7/8" H	49 1/16" W x 17 7/8" H
Glass Type	Ceramic	Ceramic	Ceramic	Ceramic
FE (P.4.1-15)	53.20%	53.20%	53.20%	53.20%

Ventilation Required:
THE FIREPLACE CHASE MUST BE VENTED BOTH ABOVE AND BELOW APPLIANCE**
ABOVE the appliance:
 151 sq./in.
BELOW the appliance:
 84 sq./in.





ENCLAVE 48 ADJUSTABLE VENTED PLATFORMS

Save on framing and adjust platform to your required height. Height is variable from 15" to 27". Ventilation Slots are provided at the bottom and between the fireplace and the platform.

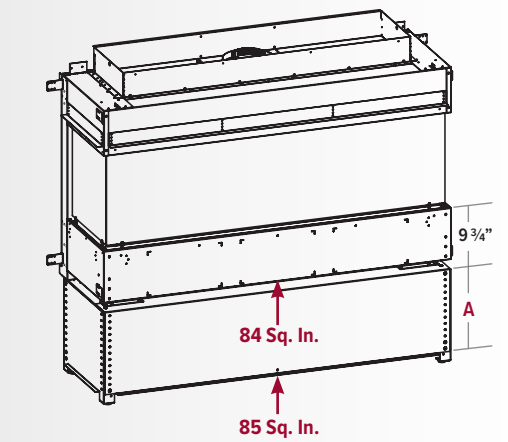

- VL48AVP**
- A** 15" to 27"
 - B** 15"
 - C** 56"
 - D** 17 1/8"
 - E** 27"

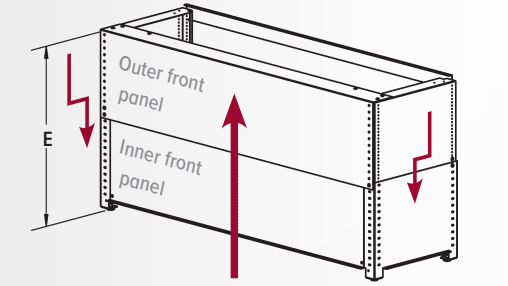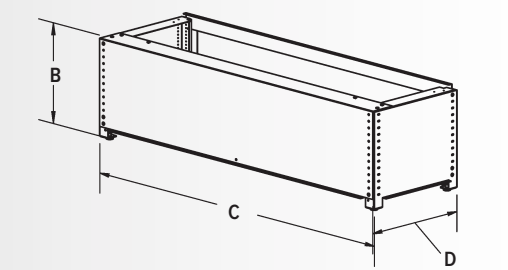

NOTE: the fireplace chase must be vented both above and below appliance, no fans are required.

Unit Illustrated: Model MQVL48NE2 Direct Vent Fireplace (Natural Gas), VL48EG Grill Kit for Enclosure, MQG5W Glass Media (White x2), MQVL48RGB Reflective Glass Liner (Back), MQVL48RGE Reflective Glass Liner (Ends), MQVL48S1BL Surround (Black). (Chase must be vented below and above appliance – consult manual for instructions).

Room air coming IN
 Hot air coming OUT

Your choice of enclosure grill (front or sides) or top opening is required

Use any finish (including combustibles) right to the edge of the fireplace door opening

Design your own chase vent solution to suit your style*

*NOTE: the fireplace chase must be vented both above and below appliance.



ENCLAVE 60



MQVLBG60NE2 Bay Peninsula Direct Vent Fireplace (Natural Gas), MQG5C Glass Media (Bronze x3), MQLOGF48D Driftwood Log Set, MQSTONE10 Decorative Stone (10 PCE), MQVL60RLSB Stacked Brick Liner.



MQVLBG60NE2 Bay Peninsula Direct Vent Fireplace (Natural Gas), MQG5C Glass Media (Bronze x3), MQVL60RBB Reflective Glass Liner (Back).



MQVLBG60NE2 Bay Peninsula Direct Vent Fireplace (Natural Gas), MQG5C Glass Media (Bronze x3), MQRBD3 Driftwood Log Set (5 PCE), MQSTONE10 Decorative Stones (10 PCE), MQVL60RLSB Stacked Brick Liner.

**This appliance is approved for use with 5"8" Kingsman Flex, M&G-Duravent Direct Vent system (Model DV-GS Series) and Snorkel, BDM Pro Form Direct Vent, Ameri-Vent Direct Vent Pipe System, ICC Excel Direct, Metal Fab Sure-Seal DV and Selkirk Direct Temp. When using ICC Excel Direct a one-foot section of 5"8" MG Duravent must be used as a starter collar at the flue of the appliance.*

***Consult Installation Manual for requirements and further clarification.*

Unit Illustrated: Model MQVLBG60NE2 Bay Peninsula Direct Vent Fireplace (Natural Gas), VL60EG Grill Kit for Enclosure, MQG5C Glass Media (Bronze x3), MQVL60RLSB Stacked Brick Liner. (Chase must be vented below and above appliance – consult manual for instructions).

MODEL	MQVLBG60NE2	MQVLBG60LPE2	MQVL60NE2	MQVL60LPE2
Type	BAY PENINSULA	BAY PENINSULA	SINGLE-SIDED	SINGE-SIDED
Fuel	Natural Gas	Propane	Natural Gas	Propane
Gas Control	IPI PF2	IPI PF2	IPI PF2	IPI PF2
Input Max.	45,000 BTU	44,000 BTU	45,000 BTU	44,000 BTU
Input Min.	32,000 BTU	35,000 BTU	32,000 BTU	35,000 BTU
Venting*	5"8"	5"8"	5"8"	5"8"
Glass Size	61 1/32" W x 17 7/8" H	61 1/32" W x 17 7/8" H	61 1/32" W x 17 7/8" H	61 1/32" W x 17 7/8" H
Glass Type	Ceramic	Ceramic	Ceramic	Ceramic
FE (P.4-1-15)	56.18%	56.52%	56.18%	56.52%

Ventilation Required:

THE FIREPLACE CHASE MUST BE VENTED BOTH ABOVE AND BELOW APPLIANCE**


ABOVE the appliance:
200 sq./in.

BELOW the appliance:
102 sq./in.



ENCLAVE 60 ADJUSTABLE VENTED PLATFORMS

Save on framing and adjust platform to your required height. Height is variable from 15" to 27". Ventilation Slots are provided at the bottom and between the fireplace and the platform.

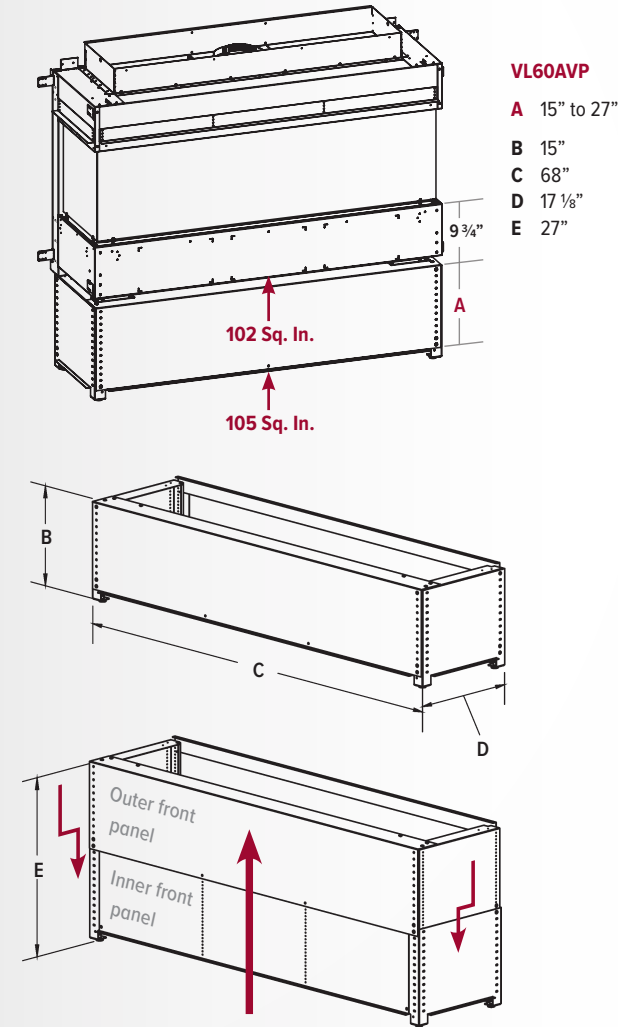

NOTE: the fireplace chase must be vented both above and below appliance, no fans are required.

Unit Illustrated: Model MQVL60NE2 Direct Vent Fireplace (Natural Gas), MQG5C Glass Media (Bronze x3), RBCB1 Cannonballs, MQVL60RBB Reflective Glass Liner (Back), MQVL48RGE Reflective Glass Liner (End). (Chase must be vented below and above appliance – consult manual for instructions).



Zero clearances to TVs and artwork

Use any finish (including combustibles) right to the edge of the fireplace door opening



Design your own chase vent solution to suit your style*

*NOTE: the fireplace chase must be vented both above and below appliance.


ENCLAVE 72



MQVLBG72NE2 Bay Peninsula Direct Vent Fireplace (Natural Gas), MQG5W Glass Media (White x3), MQVL72RGB Reflective Glass Liner (Back).



MQVL72NE2 Single Side Direct Vent Fireplace (Natural Gas), MQG5A Glass Media (Cobalt x3), MQVL72RGB Reflective Glass Liner (Back).

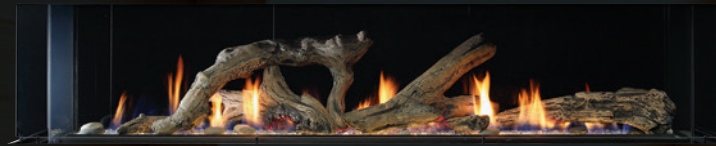

MQVLBG72NE2 Bay Peninsula Direct Vent Fireplace (Natural Gas), MQG5C Glass Media (Bronze x 3), MQLOGF48D Driftwood Log Set, MQSTONE10 Decorative Stones (10 piece), MQVL72RGB Reflective Glass Liner (Back).

**This appliance is approved for use with 5"8" Kingsman Flex, M&G-DuraVent Direct Vent system (Model DV-GS Series) and Snorkel, BDM Pro Form Direct Vent, Ameri-Vent Direct Vent Pipe System, ICC Excel Direct, Metal Fab Sure-Seal DV and Selkirk Direct Temp. When using ICC Excel Direct a one-foot section of 5"8" MG DuraVent must be used as a starter collar at the flue of the appliance.*

***Consult Installation Manual for requirements and further clarification.*

Unit Illustrated: Model MQVLBG72NE2 Bay Peninsula Direct Vent Fireplace (Natural Gas), MQG5W Glass Media (White x3), MQLOGF48D Driftwood Log Set, MQSTONE10 Decorative Stone (10 piece), MQVL72RGB Reflective Glass Liner (Back). (Chase must be vented below and above appliance – consult manual for instructions).




MODEL	MQVLBG72NE2	MQVLBG72LPE2	MQVL72NE2	MQVL72LPE2
Type	BAY PENINSULA	BAY PENINSULA	SINGLE-SIDED	SINGE-SIDED
Fuel	Natural Gas	Propane	Natural Gas	Propane
Gas Control	IPI PF2	IPI PF2	IPI PF2	IPI PF2
Input Max.	50,000 BTU	50,000 BTU	50,000 BTU	50,000 BTU
Input Min.	34,000 BTU	39,000 BTU	34,000 BTU	39,000 BTU
Venting*	5"8"	5"8"	5"8"	5"8"
Glass Size	73 1/16" W x 17 7/8" H	73 1/16" W x 17 7/8" H	73 1/16" W x 17 7/8" H	73 1/16" W x 17 7/8" H
Glass Type	Ceramic	Ceramic	Ceramic	Ceramic
FE (P.4.1-15)	60.32%	60.32%	60.32%	60.32%

Ventilation Required:
THE FIREPLACE CHASE MUST BE VENTED BOTH ABOVE AND BELOW APPLIANCE**
ABOVE the appliance: 285 sq./in.
BELOW the appliance: 158 sq./in.



ENCLAVE 72 ADJUSTABLE VENTED PLATFORMS

Save on framing and adjust platform to your required height. Height is variable from 15" to 27". Ventilation Slots are provided at the bottom and between the fireplace and the platform.

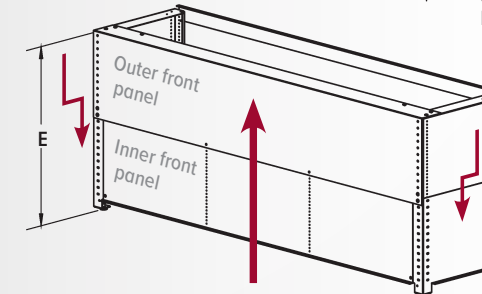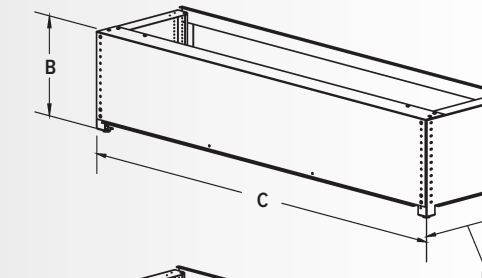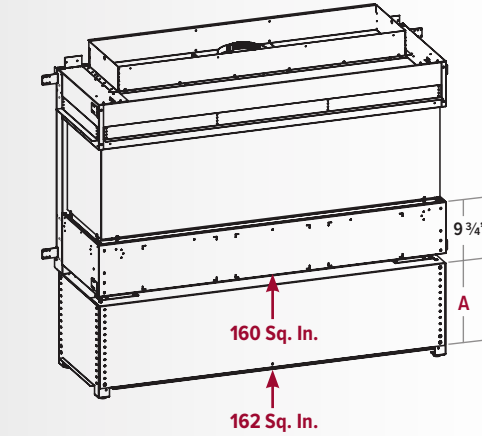

NOTE: the fireplace chase must be vented both above and below appliance, no fans are required.


Unit Illustrated: Model MQVL72NE2 Direct Vent Fireplace (Natural Gas), MQG5A Glass Media (Cobalt x3), MQVL72RGB Reflective Glass Liner (Back), VL72S1SS Surround (Stainless Steel). Shown with Optional VL72EG Grill (Front Enclosure x2). (Chase must be vented below and above appliance – consult manual for instructions).

Room air coming IN
 Hot air coming OUT

Zero clearances to TVs, artwork and decorative elements

Use any finish (including combustibles) right to the edge of the fireplace opening




Design your own chase vent solution to suit your style*

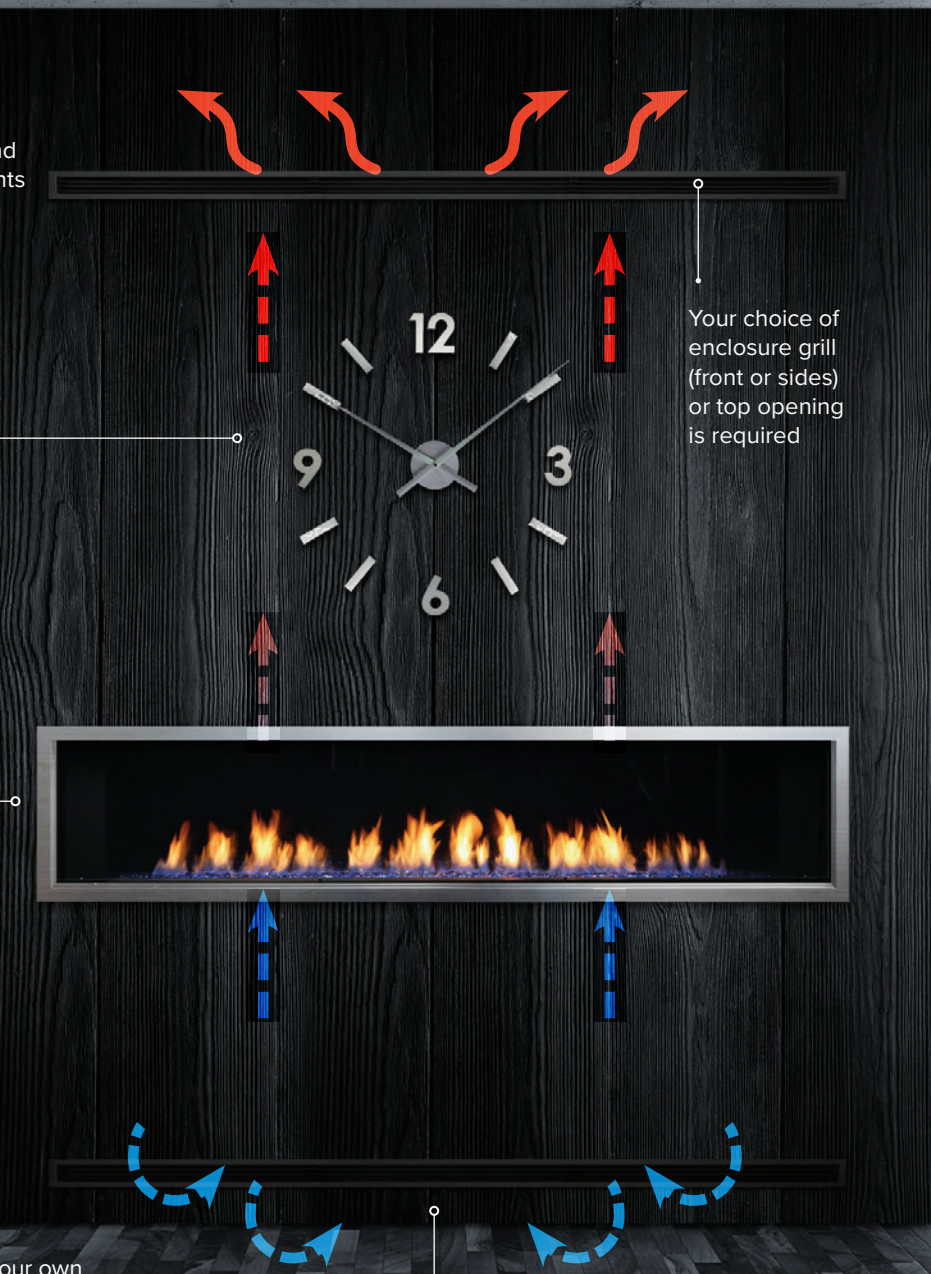

ENCLAVE PRODUCT SPECIFICATIONS


DIMENSIONS

MQVLBG34 Bay Peninsula	MQVL48 Single Side	MQVLBG48 Bay Peninsula	MQVL60 Single Side	MQVLBG60 Bay Peninsula	MQVL72 Single Side	MQVLBG72 Bay Peninsula
A 16 7/16"	A 18 13/16"	18 13/16"	A 20 1/16"	20 1/16"	A 18 13/16"	18 7/8"
B 34 5/16"	B 56 1/2"	56 1/2"	B 68 1/2"	68 1/2"	B 80 1/2"	80 1/2"
C 37 5/8"	C 36 5/16"	36 5/16"	C 36 5/16"	36 5/16"	C 36 5/16"	36 5/16"
D 34 5/8"	D 46 3/8"	46 3/8"	D 58 1/2"	58 1/2"	D 70 1/2"	70 1/2"
E 34 1/8"	E 54 15/16"	54 15/16"	E 66 1 1/16"	66 5/8"	E 78 5/8"	78 5/8"
F 21 1/2"	F 49 1/16"	49 1/16"	F 61 1/32"	61 1/32"	F 73 3/16"	73 3/16"
G 7 9/16"	G 9 3/4"	9 3/4"	G 9 3/4"	9 3/4"	G 9 3/4"	9 3/4"
H 20 15/16"	H 15 1/4"	15 1/4"	H 15 1/4"	15 1/4"	H 15 1/4"	15 1/4"
I 9/16"	I 9/16"	—	I 1 1/16"	3/4"	I 1 1/16"	3/4"
J 3 1/2"	J 4"	4"	J 4"	4"	J 4"	4"
K 5 1/16"	K 7 5/16"	7 1/4"	K 7 5/16"	7 5/16"	K 7 5/16"	7 5/16"
L 4 7/16"	L 4 9/16"	4 9/16"	L 4 9/16"	4 9/16"	L 4 9/16"	4 9/16"
M 16 3/4"	M 18"	18"	M 18"	18"	M 18 7/8"	18 7/8"
N 37 5/8"	N 36 1/4"	36 1/4"	N 36 5/16"	36 5/16"	N 36 5/16"	36 5/16"
O —	O 8 1/4"	8 1/4"	O 8 1/4"	8 1/4"	O 8 1/4"	8 1/4"

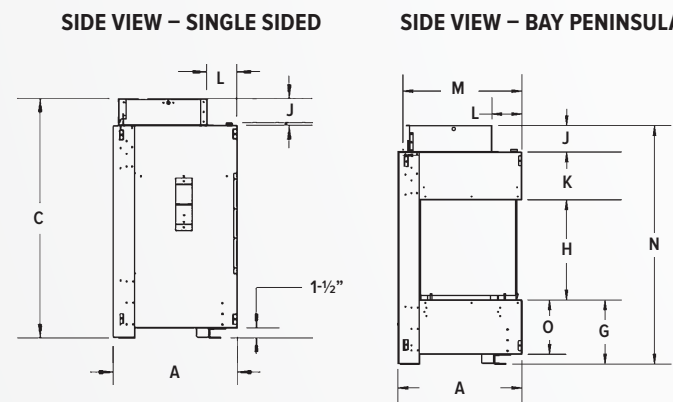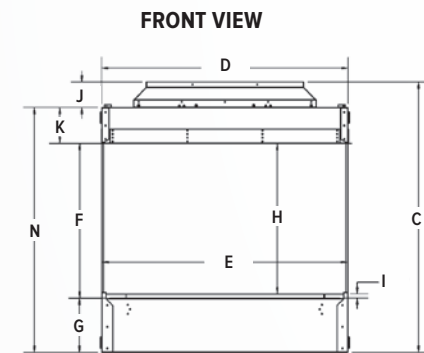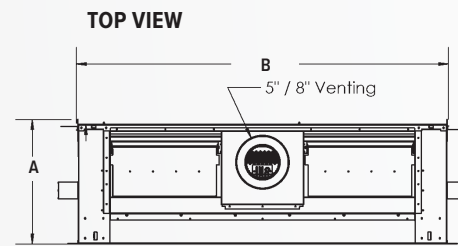


MQZCVBG34

MQVL48/60/72

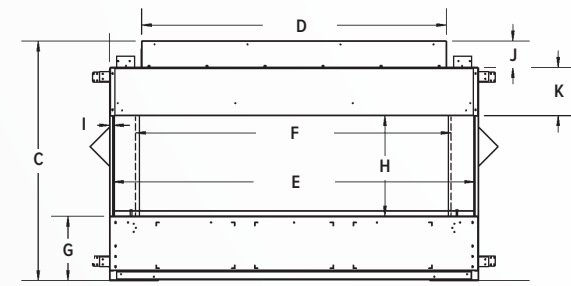


WALL SURROUND for 48/60/72 Single Side

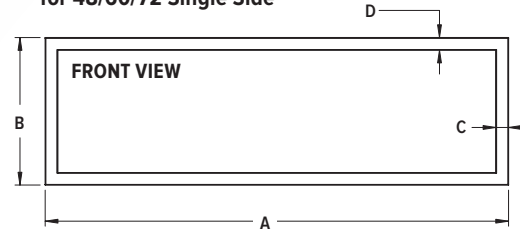

VL48S1	VL60S1	VL72S1
A 58 1/16"	70 1/16"	82 1/16"
B 18 1/2"	18 1/2"	18 1/2"
C 1 1/2"	1 1/2"	1 1/2"
D 1 1/2"	1 1/2"	1 1/2"


SIDE EXTENSION PANELS for 48/60/72 Single Side

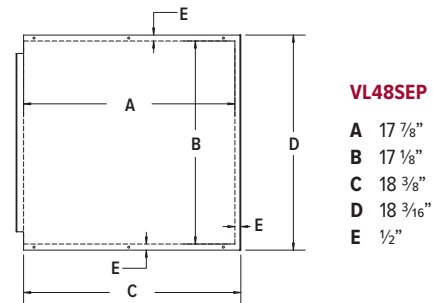


VL48SEP
A 17 7/8"
B 17 1/8"
C 18 3/8"
D 18 3/16"
E 1/2"

CORNER KIT


34 Bay: ZCV34BGCK
48/60/72 Bay: VLBGCK

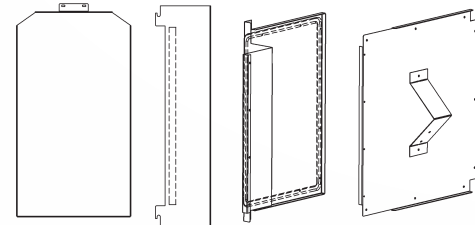


FRONT/TOP VIEW - VL34EG

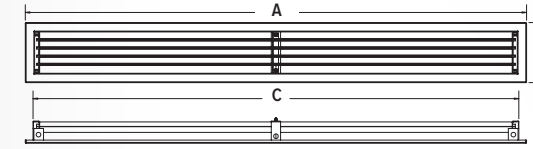

FRONT/TOP VIEW - VL48EG

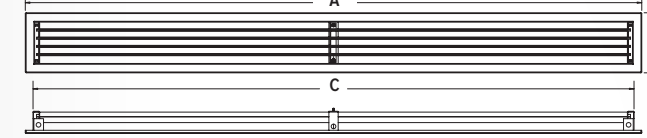

FRONT/TOP VIEW - VL60EG/VL72EG

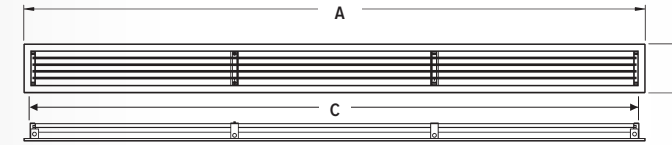


SIDE VIEW

	VL34EG	VL48EG	VL60EG	VL72EG
A 32 5/16"	49 3/4"	61 3/4"	79 3/4"	
B 4 3/8"	4 13/16"	4 7/8"	4 7/8"	
C 31 3/16"	48 1/2"	60 1/2"	78 5/8"	
D 3 1/4"	3 1/2"	3 5/8"	3 5/8"	


SIDE ENCLOSURE GRILL (PAIR)

FRONT VIEW

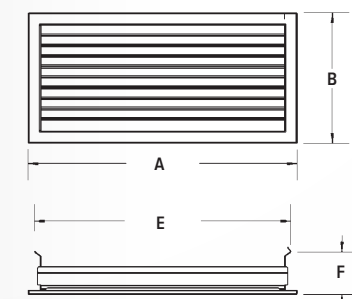

TOP VIEW

	VL34EGS	VL60EGS	VL72EGS
A 11 1/4"	16 3/16"	16 3/16"	
B 6"	7 7/8"	10 3/8"	
C 2 5/8"	2 7/8"	2 7/8"	
D 4 9/16"	6 7/16"	8 15/16"	
E 10 1/2"	15 7/16"	15 7/16"	
F 2 7/8"	2 9/16"	2 7/8"	



Unit Illustrated: Model MQVLBG60NE2 Bay Peninsula Direct Vent Fireplace (Natural Gas), MQG5C Glass Media (Bronze x3), MQLOGF48D Driftwood Log Set, MQSTONE10 Decorative Stone, MQVL60RLSB Brick Liner (Stacked Brick). (Chase must be vented below and above appliance – consult manual for instructions).



ENCLAVE ACCESSORIES

LOG SETS



MQLOGF340AK (7-Piece)
Oak Log Set
ENCLAVE 34



MQLOGF34BW (7-Piece)
Birch Log Set
ENCLAVE 34



MQ42D (6-Piece)
Driftwood Set
ENCLAVE 34



MQLOGF453 (5-Piece)
Driftwood Set
ENCLAVE 34



MQ46D (3-Piece)
Driftwood Set
ENCLAVE 48 / 60 / 72



MQRBD1 (4-Piece)
Driftwood Set with 4 Rocks
ENCLAVE 48 / 60 / 72



MQRBD3 (5-Piece) / MQRBD4 (3-Piece)
Driftwood Set
ENCLAVE 34 / 48 / 60 / 72



MQLOGF48D (6-Piece)
Driftwood Set
ENCLAVE 48 / 60 / 72



MQRBD2 (3-Piece)
Driftwood Set
ENCLAVE 48 / 60 / 72




MQRBRW (5-Piece)
Birch Log Set
ENCLAVE 34 / 48 / 60 / 72

MEDIA OPTIONS




MQG5ZG
Zircon Glacier Ice Glass

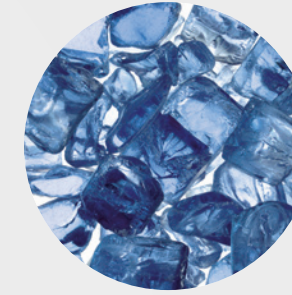

MQG5A
Cobalt Ember Glass



MQG5B
Black Ember Glass

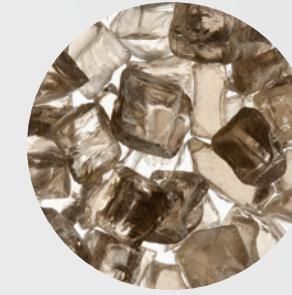

MQG5C
Bronze Ember Glass



MQG5W
White Ember Glass



MQEMBER
Ember Chunks



MQSTONE
Decorative Stones



MQROCK2
Natural Rock Set



MQROCK3
Multi-Colored Rock Set




RBCB1
Multi-Colored Cannonballs

LINERS




Traditional Brick
34 MODEL ONLY



Fluted



Stacked Brick
48 / 60 / 72 MODELS ONLY



Glass Reflective

Unit Illustrated: Model MQVLBG60NE2 Bay Peninsula Direct Vent Fireplace (Natural Gas), VLBGCK Corner Kit, MQG5C Glass Media (Bronze x3), MQRBD3 Driftwood Log Set, MQSTONE10 Decorative Stone (10 piece), MQVL60RLSB Refractory Liner (Back – Stacked Brick). (Chase must be vented below and above appliance – consult manual for instructions).




Marquis Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.

Certification: Certified to ANSI Z21.88-2017, CSA 2.33-2017 Vented Gas Fireplace Heaters.

Note: Components may have to be ordered separately to create a complete unit. Discuss with your local Marquis Dealer for clarification.

Canada
ENERGUIDE
Look for the **EnerGuide** Gas Fireplace Energy Efficiency Rating in this brochure
Based on CSA P.4.1-15



WARNING! This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel consumption, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov.

Crafted entirely in Canada, each Marquis fireplace is built to the highest standards and made to last.

LIMITED LIFETIME WARRANTY



2340 Logan Avenue
Winnipeg, Manitoba, CAN
R2R 2V3
Phone: 204.632.1962
Fax: 204.632.1960
marquisfireplaces.net

Printed in Canada
B100 – 03/2022