Unit Illustrated: Model ZCV39NHE2 Zero Clearance Direct Vent Gas Fireplace Natural Gas, MQLOGF9 Log Set (10 Piece), ZCV39RLH Refractory Brick Liner (3 Piece, Herringbone Brick), MQ39DD2BL Designer Door (Series 2) Black c/w Safety Screen.

BENTLEY zero clearance direct vent gas fireplace



## Bring the BIG VIEW INDOORS

With an expansive glass viewing area and clever designer options for customizing the look to suit your personal style, the **Bentley** by Marquis is generating some serious attention.

Available in a range of sizes and styles, you can choose from our mid efficient rated fireplace for ambiance and taking the chill out of the room, or higher efficient version for additional warmth.

With so much style and attention to detail, it's no wonder people are focused on the view indoors!

Visit **marquisfireplaces.net** to see the latest evolution in fireplaces.

## BENTLEY

## STANDARD FEATURES

- Dedicated Clean View appliance
- Millivolt or IPI valve system allows operation during a power failure with Hi/Low heat and flame adjustment
- Pan burner with realistic flame pattern
- Safety Screen Barrier
- Proflame II (PF2) Models include Remote Control: features flame, fan, thermostat, smart thermostat (WIFI Compatibility\*); Bentley 48 (P2) models include accent lighting



\* Amazon Alexa, Google Home, Smartphone

## OPTIONAL FEATURES

Fan Kit: Heat activated with variable speed control

Designer Doors: Arch, Straight Black (2 options)

#### Surrounds: Hearth Mount, Picture Frame, or Slim Line Picture Frame

Liners: Porcelain Reflective or Brick

#### Media Options:

Contemporary Rocks (2 options), Driftwood Set (2 options), Decorative Stones, Decorative Ember Glass (Glacier Ice, Cobalt Blue, Black, Bronze, White), Ember Chunks or Multi-Colored Cannonballs

### Log Sets:

Choose between Oak log sets, Birch Log Set (ZCV39/42), or Driftwood log set

Accent Lighting: for use with the Glass Tray (Dealer Installed Item)

Remote Controls (Millivolt or IPI PF1): Thermostat on/off, Thermostat on/off modulating, Thermostat on/off modulating and fan control

Thermostats: Wall Mount or Programmable





## **BENTLEY 39-42**





Unit Illustrated: Model ZCV39NE Zero Clearance Direct Vent Gas Fireplace Natural Gas, ZCV39GT Glass Tray, MQG5ZG Glass Media (ZIRCON Glacier Ice, 5 lbs. x3 Bags), ULK2 Universal Light Kit (2 Lamps), ZCV39PL Porcelain Reflective Panel Liner, ZCV39S2PFBL Surround (Picture Frame 1-5/8" Wide).

## **BENTLEY 39 PRODUCT SPECIFICATIONS**

MODEL	ZCV39N ZCV39NE ZCV39NE2	ZCV39LP ZCV39LPE ZCV39LPE2	ZCV39NH ZCV39NHE ZCV39NHE2	ZCV39LPH ZCV39LPHE ZCV39LPHE2
Fuel	Natural Gas	Propane	Natural Gas	Propane
Gas Control	Millivolt / IPI	Millivolt / IPI	Millivolt / IPI	Millivolt / IPI
Input Max.	25,000 BTU	25,000 BTU	28,000 BTU	29,000 BTU
Input Min.	16,750 BTU	20,000 BTU	19,000 BTU	23,000 BTU
FE (P.4.1-15)	52.35% / 52.24%	52.35% / 54.24%	63.81% / 66.17%	66.82% / 68.65%
Glass Size	33"W x 28 5⁄₃"H	33"W x 28 5⁄₃"H	33"W x 28 5⁄%"H	33"W x 28 5∕₃"H
Venting	4"/7" Flex or	4"/7" Flex or	4"/7" Flex or	4"/7" Flex or
	4" x 6 5⁄8" Hard Pipe*	4" x 6 ⅔" Hard Pipe*	4" x 6 <sup>5</sup> ⁄8" Hard Pipe*	4" x 6 1/8" Hard Pipe*
	or Power Vent	or Power Vent	or Power Vent	or Power Vent

\*Approved with Kingsman Flex Vent, MG Duravent-Direct Vent Pro Direct Vent System, Amerivent Direct Vent Pipe System, Selkirk Direct-Temp Venting. ICC Excel Direct Vent, BDM Pro-Form Direct Vent and Metal Fab Sure-Seal DV Pipe System. This appliance is approved with Kingsman (PVH58) Horizontal Power Vent Termination.







ZCV39NE, MQLOGF9 Log Set (10 Piece), ZCV39RLT Refractory Fiber Brick Liner (Traditional Brick), MQ39DD3BL Designer Door (Series 3, Black)



ZCV39NE, ZCV39GT Glass Tray, MQSTONE Decorative Stones, ZCV39PL Porcelain Reflective Panel Liner.



ZCV42NE, MQLOGF39BW Birch Wood Log Set, ZCV42PL Porcelain Reflective Liner.





ZCV39NE, LOGF3 Log Set (5 Piece), ZCV39RLH Refractory Fiber Brick Liner (Herringbone Brick), MQ39DD1BL Designer Door (Series 1, Black).



ZCV39NE, ZCV39GT Glass Tray, MQROCK3 Contemporary Rock Collection (Multi-Colored), ZCV39PL Porcelain Reflective Panel Liner.

## BENTLEY 39-42 PRODUCT DIMENSIONS

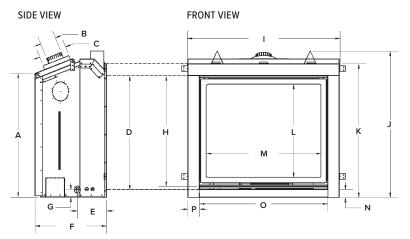



TOP VIEW

#### FRAMING DIMENSIONS

	ZCV39	ZCV42
<b>HEIGHT</b> Actual Framing	37 ¾" 37 ⅛"	40 <sup>7</sup> ⁄8" 41"
<b>FRONT WIDTH</b> Actual Framing	39 ¾" 39 ½"	42 ¾" 42 ½"
<b>DEPTH</b> Actual Framing	18 <sup>3</sup> /8" 18 <sup>1</sup> /2"**	18 <sup>3</sup> /8" 18 <sup>1</sup> /2"**

\*\*Dependent of finishing material used

### SURROUNDS

**ZCV39** 

32"

29 ¾"

7 1/2"

18 ¾"

1<sup>15</sup>/16"

28 %16"

39 ¾"

37 11/16"

34 1⁄2"

24 1⁄16"

29 ½"

33"

24 1⁄4"

18 7/16"

6 %"

39 ¾"

Α

**B** 4"

**C** 7"

D

Е

F

G

н

Т

) K

L M

N 2"

0

**P** 3"

Q

R

S

Т

ZCV42

35 1/8"

32 1/2"

7 %16"

18 7/16"

1 <sup>15</sup>⁄16"

31 11/16"

42 7/16"

40 13/16"

37 5⁄8" 27 3⁄16"

33 11/16"

37 1⁄16"

2 ½"

27 <sup>7</sup>/8" 18 <sup>7</sup>/16"

6 %"

42 7/16"

2"

4"

7"

	HEARTH MOUNT (4" WIDE)	PICTURE FRAME (4" WIDE)	PICTURE FRAME (1 5⁄8" WIDE)
ZCV39	40 5⁄8"W x 35"H	40 5⁄%"W x 37"H	36 1⁄8"W x 32 1⁄2"H
ZCV42	44 %"W x 38 %"H	44 5⁄8"W x 40 1⁄8"H	40 1⁄8"W x 35 5⁄8"H

## **BENTLEY 42 PRODUCT SPECIFICATIONS**

MODEL	ZCV42N ZCV42NE ZCV42NE2	ZCV42LP ZCV42LPE ZCV42LPE2	ZCV42NH ZCV42NHE ZCV42NHE2	ZCV42LPH ZCV42LPHE ZCV42LPHE2
Fuel	Natural Gas	Propane	Natural Gas	Propane
Gas Control	Millivolt / IPI	Millivolt / IPI	Millivolt / IPI	Millivolt / IPI
Input Max.	25,000 BTU	25,000 BTU	29,500 BTU	29,000 BTU
Input Min.	16,500 BTU	19,500 BTU	20,000 BTU	23,000 BTU
FE (P.4.1-15)	52.86% / 54.95%	52.86% / 54.95%	64.53% / 66.48%	66.65% / 68.77%
Glass Size	37 1⁄8"W x 31 ¾"H	37 1⁄8"W x 31 3⁄4"H	37 1⁄8"W x 31 3⁄4"H	37 1⁄8"W x 31 ¾"H
Venting	4"/7" Flex or	4"/7" Flex or	4"/7" Flex or	4"/7" Flex or
	4" x 6 %" Hard Pipe*	4" x 6 <sup>5</sup> / <sub>8</sub> " Hard Pipe*	4" x 6 <sup>5</sup> / <sub>8</sub> " Hard Pipe*	4" x 6 <sup>5</sup> / <sub>8</sub> " Hard Pipe*
	or Power Vent	or Power Vent	or Power Vent	or Power Vent

\*Approved with Kingsman Flex Vent, MG Duravent-Direct Vent Pro Direct Vent System, Amerivent Direct Vent Pipe System, Selkirk Direct-Temp Venting. ICC Excel Direct Vent, BDM Pro-Form Direct Vent and Metal Fab Sure-Seal DV Pipe System. This appliance is approved with Kingsman (PVH58) Horizontal Power Vent Termination.



## **BENTLEY 48**

# Go BIG

When the view is this big, it must be the Bentley 48. This big brother of the popular Bentley by Marquis is getting some serious attention and lots of second looks from home owners wanting to enjoy a statement fireplace. An expansive glass viewing area and beautiful designer options allow you to customize the look to your own style. Take the chill out of the room with this heater-rated fireplace, and bask in some serious warmth.

Wow – we made you look, didn't we?

Visit **www.marquisfireplaces.net** to see the latest evolution in fireplaces.

Unit Illustrated: MQZCV48NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQLOGF48B Burnt Oak Log Set, ZCV48RLH Herringbone Brick Liner.





## **BENTLEY 48 PRODUCT SPECIFICATIONS**


MODEL	MQZCV48N	MQZCV48LP	MQZCV48NE MQZCV48NE2	MQZCV48LPE MQZCV48LPE2
Fuel	Natural Gas	Propane	Natural Gas	Propane
Gas Control	Millivolt	Millivolt	IPI	IPI
Input Max.	42,500 BTU	42,250 BTU	42,500 BTU	42,250 BTU
Input Min.	28,500 BTU	34,000 BTU	28,500 BTU	34,000 BTU
FE (P.4.1-15)	52.24%	54.52%	53.37%	55.71%
Glass Size	41 ½"W x 34 %6"H	41 ½"W x 34 %6"H	41 ½"W x 34 %6"H	41 ½"W x 34 %6"H
Venting	5⁄%" Hard Pipe*	5⁄%" Hard Pipe*	5∕%" Hard Pipe*	5⁄%" Hard Pipe*
	or Power Vent	or Power Vent	or Power Vent	or Power Vent

\*Approved with Kingsman Flex Vent, MG Duravent-Direct Vent Pro Direct Vent System, Amerivent Direct Vent Pipe System, Selkirk Direct-Temp Venting. ICC Excel Direct Vent, BDM Pro-Form Direct Vent and Metal Fab Sure-Seal DV Pipe System. This appliance is approved with Kingsman (PVH58) Horizontal Power Vent Termination.





## **BENTLEY 48 PRODUCT DIMENSIONS**

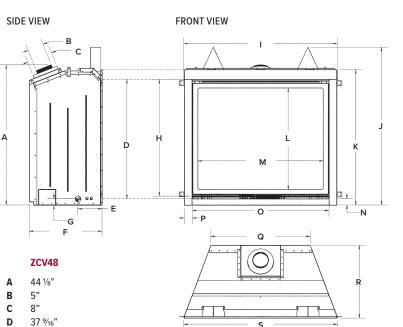

TOP VIEW

## FRAMING DIMENSIONS

S

	ZCV48
HEIGHT	
Actual	49 <sup>11</sup> / <sub>16</sub> "
Framing	49 <sup>3</sup> ⁄4"
FRONT WIDTH	
Actual	48 ¾"
Framing	48 ½"
DEPTH	
Actual	22 <sup>15</sup> /16"
Framing	24 %16"**

SURROUNDS

Е

F

G н

Т

J

Κ

L Μ

Ν 2"

0

Ρ

Q

R

S

7 5⁄8"

22 <sup>15</sup>/16"

1 <sup>15</sup>/16"

36 ¾"

48 3/8"

49 11/16"

42 11/16" 32"

39 7/16"

43"

2 ½"

31 5/16"

48 ¾"

23"

HEARTH MOUNT (4" WIDE) **ZCV48** 50 %16"W x 43 3/16"H \*\*Dependent of finishing material used

Unit Illustrated: MQZCV48NE2 Zero Clearance Direct Vent Natural Gas Fireplace, MQLOGF48D Driftwood Log Set, MQZCV48GT Glass Tray, MQSTONE10 Decorative Stone (10 Piece Set), MQZCV48RLF Fluted Brick Liner.

~d1

IL HI

## **BENTLEY ACCESSORIES**

#### **BENTLEY 39-42 LOG SETS**

MQLOGF39BW Birch Wood Log Set



MQ39D (4-Piece) Driftwood Log Set (Glass Tray Required)



MQLOGF9 (10-Piece) Split Oak Log Set




MQ42D (6-Piece) Driftwood Log Set (Glass Tray Required)



LOGF3 (5-Piece) Split Oak Log Set






MQLOGF48 Split Oak Log Set




MQLOGF48B Burnt Oak Log Set




MQLOGF48D Driftwood Log Set (Glass Tray Required)





Red Herringbone Brick Liner

39 / 42




Herringbone Brick Liner



Stacked Brick Liner





Fluted Liner

39 / 42 / 48



Traditional Brick Liner

39 / 42 / 48

Porcelain Reflective Liner 39/42/48

## WALL SURROUND

## DESIGNER DOORS



STONE MEDIA OPTIONS (Glass Tray Required)



MQEMBER Ember Chunks



MQSTONE Decorative Stones



MQROCK2 Natural Rock Set


GLASS MEDIA OPTIONS (Glass Tray Required)



MQROCK3 Multi-Colored Rock Set



RBCB1 Multi-Colored Cannonballs



MQG5ZG Zircon Glacier Ice Glass



MQG5A Cobalt Ember Glass



MQG5B Black Ember Glass



MQG5C Bronze Ember Glass



MQG5W White Ember Glass





Marquis Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.

Certification: These Models are certified to ANSI Z21.88-2017 CSA 2.33-2017 Vented Gas Fireplace Heaters.

Note: Components may have to be ordered separately to create a complete unit. Discuss with your local Marquis Dealer for clarification.

## Canadä

## ENERGUIDE

Look for the **EnerGuide** Gas Fireplace Energy Efficiency Rating in this brochure

Based on CSA P.4.1-15

#### FOR CALIFORNIA RESIDENTS ONLY:

WARNING! This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel consumption, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov. Crafted entirely in Canada, each Marquis fireplace is built to the highest standards and made to last.

LIMITED LIFETIME WARRANTY



2340 Logan Avenue Winnipeg, Manitoba, CAN R2R 2V3 Phone: 204.632.1962 Fax: 204.632.1960 marquisfireplaces.net

Printed in Canada **B106 - 10/20**