



ISOKERN® All Fuel Standard

Assembled Firebox and
Smoke Dome Dimensions
for 36, 42, 46



APPLICATIONS:

Indoor
Outdoor
Wood
Natural Gas
LP (Liquid Propane)
Custom Finish
Multi-Sided Availability
DM 54 Chimney
Eco-Steel Chimney
Fire-Lite Application

Make your ideal dream home a dream come true with Isokern's Standard Series.

As the first Isokern modular fireplace introduced in the United States, the modular construction of the Standard Series allows you to unleash your creative desires with a fireplace as unique as you are. Whether you choose wood burning, natural gas or liquid propane, the Standard Series sets the standard. In an outdoor application, this fireplace can be finished with any veneer including brick, stone, stucco, or tile.


Specifications

Please Note: When using the Isokern brick ledge it is required that the firebox/smoke dome assembly include the placement of a 4" by 4" by 3/8" minimum steel angle across the firebox opening. This item can be sourced locally.


Framing & Weight

Model	Minimum Framing	Weight
36	(46" w) x (65" h) x (26 3/4" d)	1205 lbs
42	(52" w) x (65" h) x (26 3/4" d)	1325 lbs
46	(56" w) x (65" h) x (26 3/4" d)	1450 lbs


Front View

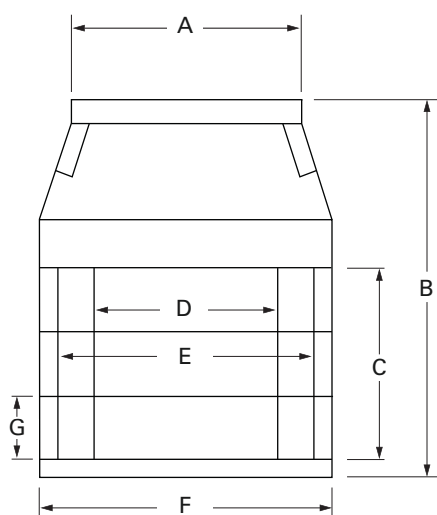

Side View

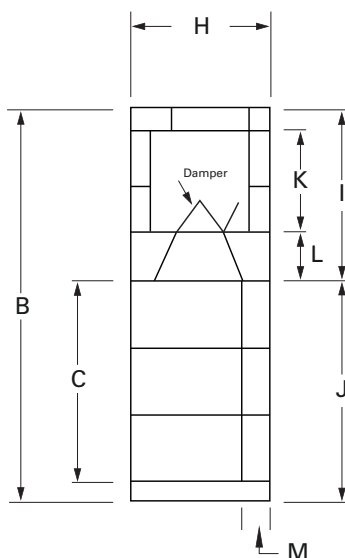

Plan View

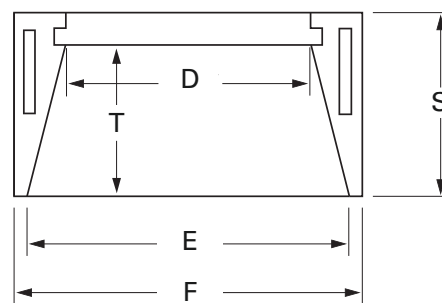

Front View	Model	A	B	C	D	E	F	G
	36	33"	63 1/4"	31 1/2"	27 1/4"	37 1/8"	43"	10 1/2"
	42	33"	63 1/4"	31 1/2"	33 1/4"	43 1/8"	49"	10 1/2"
	46	43"	63 1/4"	31 1/2"	37 1/4"	47 1/8"	53"	10 1/2"

Side View	Model	B	C	H	I	J	K	L	M
	36	63 1/4"	31 1/2"	25 1/4"	28 3/4"	34 1/2"	16"	8"	5"
	42	63 1/4"	31 1/2"	25 1/4"	28 3/4"	34 1/2"	16"	8"	5"
	46	63 1/4"	31 1/2"	25 1/4"	28 3/4"	34 1/2"	16"	8"	5"

Plan View	Model	D	E	F	S	T
	36	27 1/4"	37 1/8"	43"	25 1/4"	20 1/4"
	42	33 1/4"	43 1/8"	49"	25 1/4"	20 1/4"
	46	37 1/4"	47 1/8"	53"	25 1/4"	20 1/4"