



Unit Illustrated: ZCVRB60NE Zero Clearance Direct Vent Gas Fireplace (Natural Gas),
MQSTONE Decorative Stones, ZCVRB60PL Liners (Porcelain Reflective).
Shown with Vented Chase Option VL60EG Front Enclosure Grill.

SERENE

ZERO CLEARANCE DIRECT VENT GAS FIREPLACE

 **marquis**
FIREPLACE COLLECTION

SERENE 47 / 60 / 72

A FEELING OF SERENITY.

At the end of a busy day, cozy up to the new **SERENE** by Marquis. With beautiful designer details and the highest quality craftsmanship, Serene combines pure comfort with a wow factor that comes from your choice of rocks and driftwood, decorative stones, cannonballs or ember glass. Relax and unwind the Serene way.

Visit www.marquisfireplaces.net to see the latest evolution in fireplaces.

Find all detailed
Serene manuals:



STANDARD FEATURES

- Hi/Low Millivolt or IPI valve system will operate during power failures
- Bronze Glass
- Mobile Home, Bedroom and Bed Sitting Room approved
- Proflame II Models include remote control – features flame, fan, thermostat, smart thermostat (WIFI Compatible*) and LED lights (non-dimmable)
- Safety Screen Barrier



*Smartphone (local WIFI only)

OPTIONAL FEATURES

Surround: Black or Stainless Steel

Fan Kit: Heat activated with variable speed control

Universal Light Kit (MV/IPI PF1): Two Lamps (accent lighting)

Wall Mount Thermostat: Standard on/off or Programmable
5 day (weekday) and 2 day (weekend)

Log Sets: Three Piece Driftwood Set (MQ46D), Four Piece Driftwood with Four Rocks (MQRBD1), Three Piece Driftwood Log Set (MQRBD4), Five Piece Driftwood Set (MQRBD3), or Five Piece Birch Log Set (MQRBRW)

Media Options: Contemporary Rocks, Decorative Stones, Decorative Ember Glass (Glacier Ice, Cobalt Blue, Black, Bronze, White), Ember Chunks or Multi-Colored Cannonballs

Liners: Porcelain Reflective, Fluted Brick (Serene 47),
or Stacked Stone (Serene 60/72)

Remote Controls: Thermostat on/off, Thermostat on/off modulating,
Thermostat on/off modulating, fan control and lights

Wall Mount Battery Holder (WMBH):

The battery holder provides power to the IPI system in case of power failures. Locating the battery holder outside of the fireplace (wall mount), provides a convenient and accessible location for battery installation and removal.



Enclosure Grill Framed Opening*:

	FRONT GRILL			SIDE GRILL		
Model	Part Number	Width	Height	Part Number	Width	Height
SERENE 47	V46EG	46 3/4"	2 5/8"	VL60EGS	15 1/4"	6 5/8"
SERENE 60	VL60EG	60 5/8"	3 5/8"	VL60EGS	15 1/4"	6 5/8"
SERENE 72	VL72EG	78 5/8"	3 5/8"	VL72EGS	15 1/4"	9"

*When appliance is installed using vented chase technology.

SERENE 47

SERENE 47 PRODUCT SPECIFICATIONS

MODEL	ZCVRB47N/NE MQZCVRB47NE2	ZCVRB47LP/LPE MQZCVRB47LPE2
Fuel	Natural	Propane
Gas Control	Millivolt / IPI	Millivolt / IPI
Input Max.	24,500 BTU	24,500 BTU
Input Min.	16,500 BTU	20,500 BTU
FE (P.4.1-15)	55.26% / 57.31%	55.01% / 57.10%
Viewing Area	41 5/8"W x 15 7/8"H	41 5/8"W x 15 7/8"H
Venting	4"/7" Flex or 4" x 6 5/8" Hard Pipe	4"/7" Flex or 4" x 6 5/8" Hard Pipe



Unit Illustrated: MQZCVRB47NE2 Zero Clearance Direct Vent Gas Fireplace (Natural Gas), ZCVRB47S1SS Surround (Stainless Steel), MORBRW Log Set (Birch), MQSTONE10 Decorative Stones, ZCVRB47PL Liners (Porcelain Reflective).

VENTED CHASE OPTION

SERENE 47

WITH OPENINGS (NO GRILLS)

Min. Enclosure Height

Min. 105 sq/in.

70"

Min. Opening Below Ceiling

1-1/4"

WITH GRILLS (MIN. AIR FREE OPENINGS)

Min. Enclosure Height

105 sq/in.

70"

Grill Opening (Max. distance from top of enclosure)


2"

Unit Illustrated: ZCVRB47NE Zero Clearance Direct Vent Gas Fireplace (Natural Gas), MQZCVRB47RLF Liner (Fluted). Shown as a Vented Chase (top of chase is open).




SERENE 47 PRODUCT DIMENSIONS

FRONT VIEW

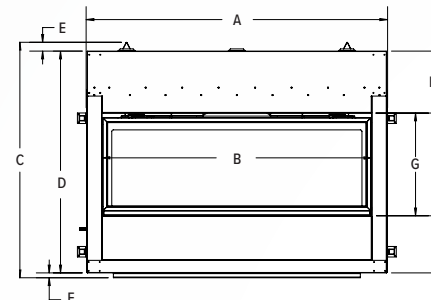


SIDE VIEW



- A 46 5/8"
- B 41 5/8"
- C 38 5/8"
- D 35 1/16"
- E 2 1/4"
- F 3/4"
- G 15 7/8"
- H 11"
- I 8 13/16"
- J 34 5/8"
- K 17 3/4"
- L 11 1/16"
- M 29 1/16"
- N 31 1/16"
- O 17 3/4"
- P 2 1/16"
- Q 3 3/16"

TOP VIEW

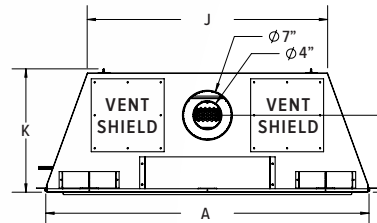

FIREPLACE DIMENSIONS

Width Height Depth
46 5/8" 38 5/8" 17 3/4"


FRAMING DIMENSIONS

Width Height Depth
47" 38 3/4" 18 1/4"

**dependent of finishing material used.*

OPTIONAL WALL SURROUND


FRONT VIEW




- A 44 5/8"
- B 1 1/2"
- C 1 1/2"
- D 17 3/4"
- E 1"
- F 1 3/4"

OPTIONAL SIDE GRILL – VL60EGS


FRONT VIEW



SIDE VIEW




TOP VIEW




- A 16 3/16"
- B 7 7/8"
- C 6 7/16"
- D 1/4"
- E 15 7/16"
- F 2 9/16"

OPTIONAL FRONT ENCLOSURE GRILL – V46EG

FRONT VIEW



SIDE VIEW



- A 47 13/16"
- B 3 13/16"
- C 46 9/16"
- D 2 1/2"
- E 1 9/16"

SERENE 60

SERENE 60 PRODUCT SPECIFICATIONS

MODEL	ZCVRB60N ZCVRB60NE MQZCVRB60NE2	ZCVRB60LP ZCVRB60LPE MQZCVRB60LPE2
Fuel	Natural	Propane
Gas Control	Millivolt / IPI	Millivolt / IPI
Input Max.	35,000 BTU	35,000 BTU
Input Min.	23,000 BTU	28,000 BTU
FE (P.4.1-15)	55.27%/56.66%	55.27%/56.66%
Viewing Area	61 1/8"W x 19 15/16"H	61 1/8"W x 19 15/16"H
Venting	5"/8"	5"/8"



Unit Illustrated: MQZCVRB60NE2 Zero Clearance Direct Vent Gas Fireplace (Natural Gas), ZCVRB60S1BL Surround (Black), MQ46D Log Set (Driftwood), MQSTONE10 Decorative Stones, MQRB60RLS Liner (Stacked Brick).
Shown as a Vented Chase (top of chase is open).

VENTED CHASE OPTION

WITH OPENINGS (NO GRILLS)

Min. Enclosure Height

Min. Opening Below Ceiling

WITH GRILLS (MIN. AIR FREE OPENINGS)

Min. Enclosure Height

Grill Opening (Max. distance from top of enclosure)

SERENE 60

Min. 200 sq/in.

76"

1-7/8"

220 sq/in.

76"

3/4"



ZCVRB60NE Zero Clearance Direct Vent Gas Fireplace (Natural Gas), MQG5W Glass Media (White), ZCVRB60PL Liners (Porcelain Reflective).



ZCVRB60NE Zero Clearance Direct Vent Gas Fireplace (Natural Gas), RBCB1 Cannonballs, ZCVRB60PL Liners (Porcelain Reflective).

Unit Illustrated: MQZCVRB60NE2


Zero Clearance Direct Vent Linear Gas Fireplace (Natural Gas), ZCVRB60S1BL Surround (Black), MQLOAK1 Log Set (Oak), ZCVRB60PL Liners (Porcelain Reflective).

Shown as a Vented Chase with optional VL60EG Front Enclosure Grill.




SERENE 60 PRODUCT DIMENSIONS

FRONT VIEW

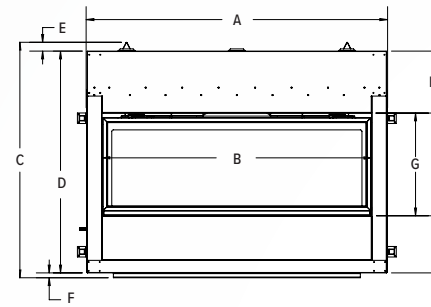

SIDE VIEW



- A 66 3/16"
- B 61 1/8"
- C 39 9/16"
- D 38 5/16"
- E 1/2"
- F 3/4"
- G 19 15/16"
- H 9 9/16"
- I 8 13/16"
- J 53 3/8"
- K 19 3/8"
- L 11 9/16"
- M 33 1/16"
- N 35 3/4"
- O 18 3/4"
- P 2 1/16"
- Q 3 3/16"

FIREPLACE DIMENSIONS


Width Height Depth
66 3/16" 39 9/16" 19 3/8"

FRAMING DIMENSIONS

Width Height Depth
67" 39 3/4" 19 1/4"



*dependent of finishing material used.

TOP VIEW

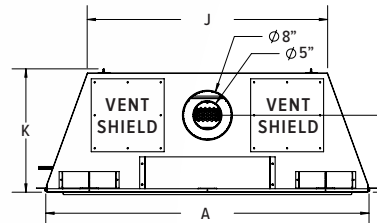

OPTIONAL WALL SURROUND


FRONT VIEW

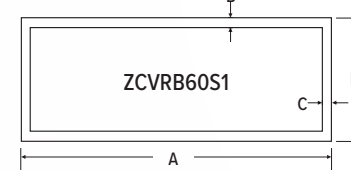


- A 64"
- B 1 1/2"
- C 1 1/2"
- D 23"
- E 3/4"

OPTIONAL SIDE GRILL - VL60EGS


FRONT VIEW



SIDE VIEW




TOP VIEW




- A 16 3/16"
- B 7 7/8"
- C 2 7/8"
- D 6 7/16"
- E 1/4"
- F 15 7/16"
- G 2 9/16"

OPTIONAL FRONT ENCLOSURE GRILL - VL60EG

FRONT VIEW



SIDE VIEW



- A 61 3/4"
- B 4 7/8"
- C 60 1/2"
- D 3 1/2"

SERENE 72

SERENE 72 PRODUCT SPECIFICATIONS

MODEL	ZCVRB72N	ZCVRB72LP	ZCVRB72NE MQZCVRB72NE2	ZCVRB72LPE MQZCVRB72LPE2
Fuel	Natural	Propane	Natural	Propane
Gas Control	Millivolt	Millivolt	IPI	IPI
Input Max.	50,000 BTU	50,000 BTU	50,000 BTU	50,000 BTU
Input Min.	34,000 BTU	39,000 BTU	34,000 BTU	39,000 BTU
FE (P.4.1-15)	53.14%	53.14%	53.64%	53.64%
Viewing Area	73 7/8"W x 20"H	73 7/8"W x 20"H	73 7/8"W x 20"H	73 7/8"W x 20"H
Venting	5"/8"	5"/8"	5"/8"	5"/8"



Unit Illustrated: ZCVRB72NE Zero Clearance Direct Vent Gas Fireplace (Natural Gas), ZCVRB72S1BL Surround (Black), MQVL72RLFB2 Back Liner (Fluted), MQVL60RLF2 End Liners (Fluted), MQRBRW Log Set (Birch).
Shown as a Vented Chase with optional VL72EG Enclosure Grill.

SERENE 72



Unit Illustrated: MQZCVRB72NE2 Zero Clearance Direct Vent Gas Fireplace (Natural Gas), ZCVRB72S1BL Surround (Black), MQVL72RGB Back Liner (Reflective Glass), MQVL72RGE End Liners (Reflective Glass).

Shown as a Vented Chase with optional VL72EGS Enclosure Grill.

VENTED CHASE OPTION

WITH OPENINGS (NO GRILLS)

Min. Enclosure Height

Min. Opening Below Ceiling

WITH GRILLS (MIN. AIR FREE OPENINGS)

Min. Enclosure Height

Grill Opening (Max. distance from top of enclosure)

SERENE 72

Min. 285 sq/in.

79"

2- $\frac{3}{8}$ "

285 sq/in.

79"

$\frac{3}{4}$ "




ZCVRB72NE Zero Clearance Direct Vent Gas Fireplace (Natural Gas), RBCB1 Cannonballs, ZCVRB72PL Liners (Porcelain Reflective).




ZCVRB72NE Zero Clearance Direct Vent Gas Fireplace (Natural Gas), MQG5W Glass Media (White), MQSTONE Decorative Stones, ZCVRB72PL Liners (Porcelain Reflective).

SERENE 72 PRODUCT DIMENSIONS


FRONT VIEW

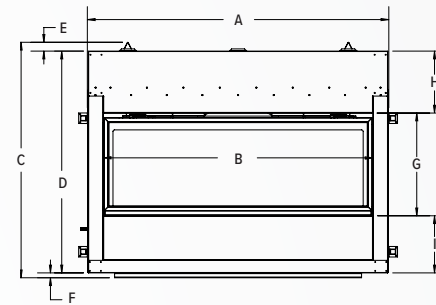

SIDE VIEW



TOP VIEW

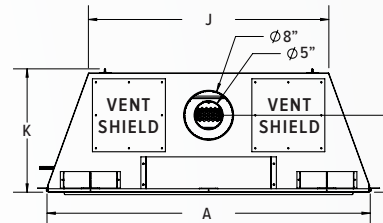

FIREPLACE DIMENSIONS

Width	Height	Depth
78 $\frac{3}{4}$ "	42"	19 $\frac{3}{8}$ "

FRAMING DIMENSIONS


Width	Height	Depth
79 $\frac{1}{8}$ "	42"	19"

**dependent of finishing material used.*

A	78 $\frac{3}{4}$ "
B	73 $\frac{7}{8}$ "
C	42"
D	40"
E	1 $\frac{1}{2}$ "
F	$\frac{3}{4}$ "
G	20"
H	11 $\frac{15}{16}$ "
I	7 $\frac{1}{4}$ "
J	71 $\frac{3}{4}$ "
K	19 $\frac{3}{8}$ "
L	12 $\frac{1}{4}$ "
M	34 $\frac{1}{8}$ "
N	40 $\frac{5}{16}$ "
O	19 $\frac{3}{8}$ "
P	4 $\frac{3}{4}$ "
Q	3 $\frac{3}{16}$ "

OPTIONAL WALL SURROUND - (BLACK OR STAINLESS)

FRONT VIEW

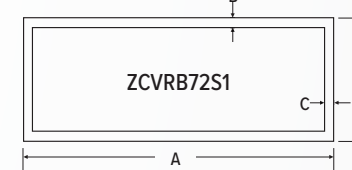


A	76 $\frac{3}{4}$ "
B	1 $\frac{1}{2}$ "
C	1 $\frac{1}{2}$ "
D	23"
E	$\frac{3}{4}$ "


SIDE

OPTIONAL SIDE GRILL - VL72EGS


FRONT VIEW



SIDE VIEW




TOP VIEW




A	16 $\frac{3}{16}$ "
B	10 $\frac{3}{8}$ "
C	2 $\frac{7}{8}$ "
D	8 $\frac{15}{16}$ "
E	$\frac{1}{4}$ "
F	15 $\frac{7}{16}$ "
G	2 $\frac{9}{16}$ "

OPTIONAL FRONT ENCLOSURE GRILL - VL72EG

FRONT VIEW



SIDE VIEW



A	79 $\frac{3}{4}$ "
B	4 $\frac{7}{8}$ "
C	78 $\frac{1}{2}$ "
D	3 $\frac{1}{2}$ "

ACCESSORIES

LOG SETS



MQ46D – Driftwood



MQRBD1 – Driftwood with Rocks



MQRBD2 – Driftwood



MQRBD3/MQRBD4 – Driftwood



MQRBRW – Birchwood



MQLOAK1 – Oak

MEDIA OPTIONS*



MQG5ZG – Zircon Glacier Ice Glass



MQG5A – Cobalt Ember Glass




MQG5B – Black Ember Glass



MQG5C – Bronze Ember Glass



MQG5W – White Ember Glass



Black



MQEMBER – Ember Chunks




MQSTONE – Decorative Stones



MQROCK2 – Natural Rocks




RBCB1 – Multi-Colored
Cannonballs



Stainless Steel

LINERS




RLS – Stacked Brick
SERENE 60 / 72



RLF – Fluted
SERENE 47 / 72



PL – Porcelain Reflective
SERENE 47 / 60 / 72



RG - Reflective Glass
SERENE 72

**Glass Tray Required*

COOL TOUCH WALL TECHNOLOGY OPTION

The chase of the appliance may be vented to achieve Cool Touch Walls or reduced Mantel Clearances.


Benefits to Cool Touch Wall Technology:

- Wall above fireplace will be cooler, useful when installing TVs or Artwork above fireplace.
- In some instances combustible materials can be used to cover the face of the fireplace (please consult installation manual).
- Mantel height is lower than Non-Vented Chase.
- Chase must be vented at the top with a specified grill or opening size.
- If the chase bumps out into the room, side grills can be installed on each side of the chase.


See illustrations and manual for further information.

Minimum enclosure height for a vented chase is measured from bottom of fireplace, ventilation of minimum free air opening is required. Choose between our Enclosure Grills (Front or Sides) for adequate ventilation opening as stated in the manual. Grill or opening must meet minimum (as specified in the installation manual) of chase top/ceiling.


NOTE: To vent the fireplace chase, removal of vent shields from the fireplace is required.

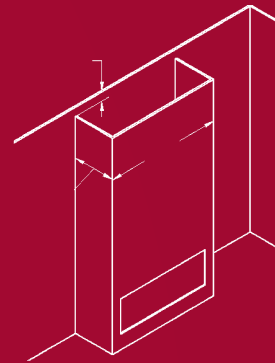

Open chase framing with enclosure min. below ceiling

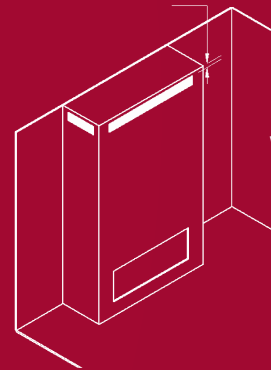

Framing to ceiling with front or side vents

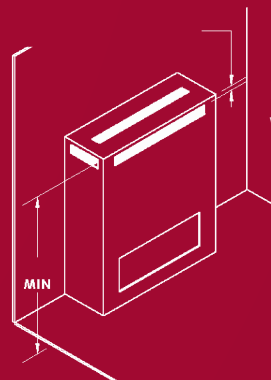

Minimum enclosure with front or side vents




Framing to ceiling with open front



Framing to ceiling with vents at front and back



Framing to ceiling, minimum enclosure with front or side vents

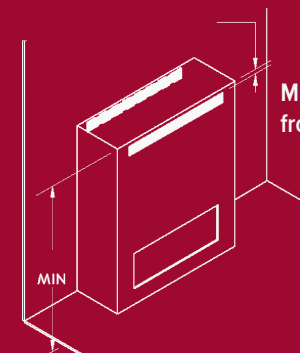

Minimum enclosure with front and back vents



FOR CALIFORNIA RESIDENTS ONLY:

WARNING! This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel consumption, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov.



Marquis Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.

Certification: Certified to ANSI Z21.88-19, CSA 2.33-19, CSA 2.17-2017 Vented Gas Fireplace Heaters.

Note: Components may have to be ordered separately to create a complete unit. Discuss with your local Marquis Dealer for clarification.

Canada

ENERGUIDE

Look for the **EnerGuide**
Gas Fireplace Energy
Efficiency Rating in this brochure

Based on CSA P.4.1-15

Unit Illustrated:

ZCVRB60NE Zero Clearance Direct Vent Gas Fireplace
(Natural Gas), ZCVRB60S1SS Surround (Stainless Steel),
MQEMBER Ember Chunks, MQRBD3 Log Set (Driftwood),
MQVL60RLSB Liner (Stacked Brick).

Crafted entirely in Canada, each
Marquis fireplace is built to the
highest standards and made to last.

LIMITED LIFETIME WARRANTY



2340 Logan Avenue
Winnipeg, Manitoba, CAN
R2R 2V3
Phone: 204.632.1962
Fax: 204.632.1960
marquisfireplaces.net

Printed in Canada
B104 - 03/2026