GALAXY GSS62 OUTDOOR GAS FIREPLACE




An optional see-through conversion kit, GSS62STC is available for this model.

Specifications: Single-sided

Model	BTU	Width		Height		Depth		Viewing Area
wodei		Actual	Framing	Actual	Framing	Actual	Framing	Viewing Area
GSS62	60,000	66 9/16"	67"	40 1/8"	40 1/2"	15 15/16"	17"	62 1/16" X 20"

Dimensions: Single-sided

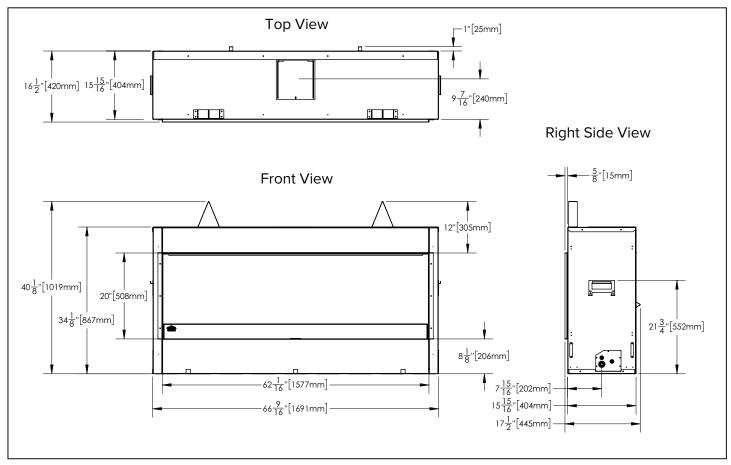

Product information provided is not complete and is subject to change without notice. Please consult the installation manual for the most up to date installation information.


GALAXY GSS62 OUTDOOR GAS FIREPLACE




Specifications: See-through

Model	вти	Width		Height		Depth		Viewing Area
		Actual	Framing	Actual	Framing	Actual	Framing	Viewing Area
GSS62	60,000	66 9/16"	67"	40 1/8"	40 1/2"	15 15/16"	15 15/16"	62 1/16" X 20"

Dimensions: See-through

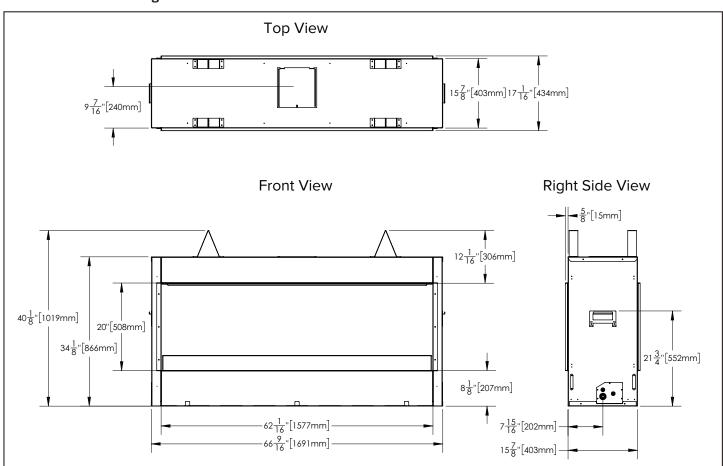

Appliance Location



Ensure at least 30% of the outdoor living space periphery is open and unobstructed.

Any enclosure (shelter) in which the appliance is used must comply with one of the following:

With walls on all sides, but at least one permanent opening at ground level and no overhead cover (FIG. 1).

Within a partial enclosure which includes an overhead cover and no more than two sidewalls. These sidewalls may be parallel, as in a breezeway, or at right angles to each other **(Fig. 2)**.

Within a partial enclosure which includes an overhead cover and three widewalls, as long as 30 percent or more of the horizontal periphery of the enclosure is permanently open **(Fig.3)**.


GALAXY GSS62 OUTDOOR GAS FIREPLACE



Product information provided is not complete and is subject to change without notice. Please consult the installation manual for the most up to date installation information.


Framing

Minimum Enclosure Clearances

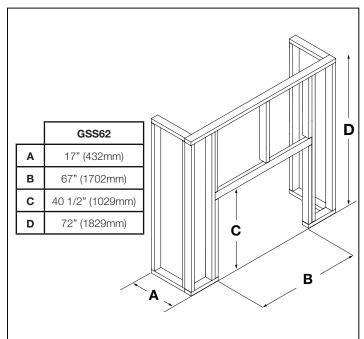

This appliance requires a minimum enclosure height of 72" (1829mm). For temperature requirements, the enclosure space around and above the appliance must be left unobstructed.

Minimum Clearance to Combustible Enclosures

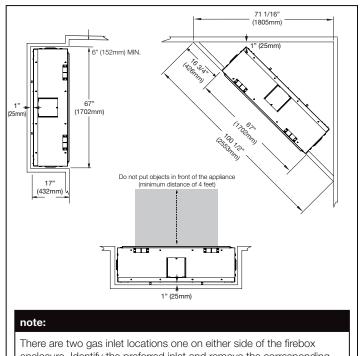

enclosure. Identify the preferred inlet and remove the corresponding knock out prior to install.

Combustible Mantel Clearances

