

PARAGON
MULTI SIDED

FEATURING TRUFLAME TECHNOLOGY

DVCT SEE THROUGH
TRADITIONAL

DVCT40CSP95N

SEE THROUGH
DIRECT VENT

QUICK DIMENSIONS

	DVCT40CS		
	UNIT	FRAM.	FRAM. (WITH OUTDOOR KIT)
F.WIDTH	57¼	48	58
B.WIDTH	57¼	48	58
HEIGHT	47½	59	62
DEPTH	24¾	23½	25½
VIEWING	35 x 40⅞		

Standard

Micro mesh screen
Multi-function remote control
Remote Hi-Lo flame
Halogen downlighting

Options

Heat management
Decorative fronts
Traditional logsets[†]
Traditional and contemporary liners[†]
Indoor-outdoor kit
Propane conversion kit
WiFi phone app control




BTU LISTING

DVCT40NAT / 60,500
DVCT40LP / 55,000

[†]Required for installation



PARAGON DIMENSIONS

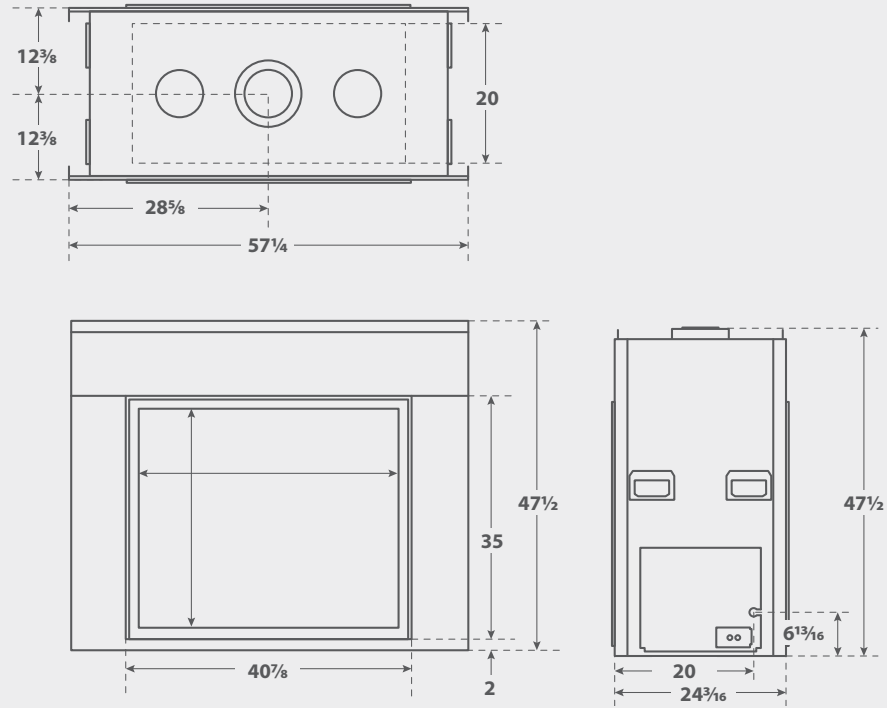

MONTIGO / PARAGON / DVCT40CSP95N



MONTIGO / PARAGON / DVCT40CSP95N

OPTIONS & FEATURES



REMOTE



WIFI PHONE APP CONTROL




WALL REMOTE



DOWNLIGHTING



TRADITIONAL LOGETS




FANS



DECORATIVE FRONT

LINERS



VINTAGE BROWN



GREY HERRINGBONE



BLACK PORCELAIN

Unit Specifications

ICON LEGEND

AVAILABLE

+

NOT AVAILABLE

-

DEDICATED

◊


STANDARD

◦

	BTU NATURAL GAS (MAX)	BTU LIQUID PROPANE (MAX)	VENTING	CLEARANCE TOP	CLEARANCE SIDES	CLEARANCE BACK	CLEARANCE FLOOR	FRONT VIEWING AREA	FRONT GLASS TYPE	STANDARD MEDIA	MICRO MESH SCREEN	POWERVENT	REMOTE CONTROL	FANS	UPLIGHTING	DOWNLIGHTING
DVCT36CBP95(N,P)-2	40,000	40,000	5"/8"	36	2	0	0	31¾ × 28¾	HIGH TEMPERATURE	N/A	◦	+	◦	+	-	◦
DVCT40CBP95(N,P)-2	47,500	45,000	5"/8"	36	2	0	0	36 × 30¾	HIGH TEMPERATURE	N/A	◦	+	◦	+	-	◦
DVCT50CBP95K(N,P)-1	56,500	55,000	5"/8"	36	2	0	0	47¾ × 36¾	HIGH TEMPERATURE	N/A	◦	+	◦	+	-	◦
DVCT40CSP95(N,P)-1	60,500	55,000	5"/8"	24	3	0	0	31½ × 37¾	HIGH TEMPERATURE	N/A	◦	+	◦	+	-	◦


DVCT SINGLE SIDED FRAMING

	A	B	C
DVCT36	53½	45½	22⅞
DVCT40	55½	49½	24
DVCT50	58½	58½	24

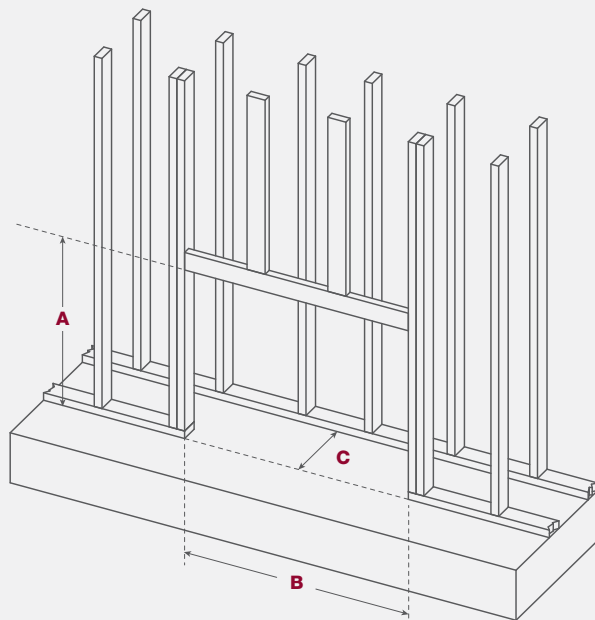

DVCT SEE THROUGH FRAMING

	A1	A2	B	C
DVCT40CSP	59	59	57¾	23½
DVCT40CSP WITH OUTDOOR KIT	59	62	58	25½

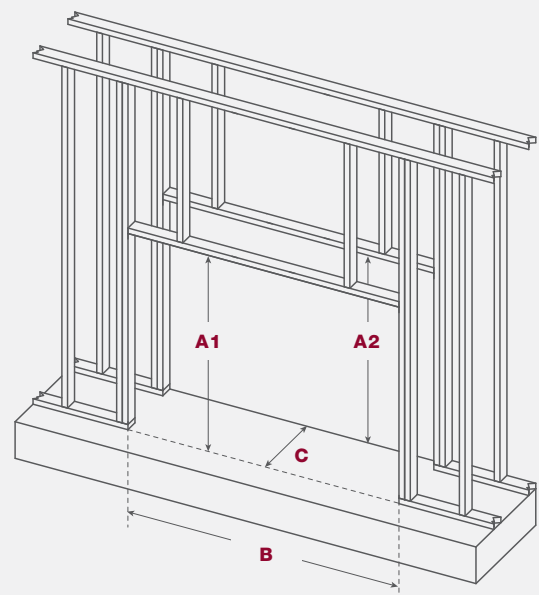

Header on edge not required if framing meets clearance to venting